

Deze download wordt u aangeboden door **Pick-upnaalden.nl** Fazantendreef 17-19 8251 JR Dronten

T: 0321 769022

E: info@pick-upnaalden.nl W: www.pickupnaalden.com W: www.pickupnaald.com

Facebook: www.facebook.com/pickupnaalden

Twitter: twitter.com/Pickupnaalden


Google+: plus.google.com/114738445546162436900

# DENON

# SERVICE MANUAL

# SERVO-CONTROLLED DIRECT DRIVE RECORD PLAYER

MODEL DP-60L

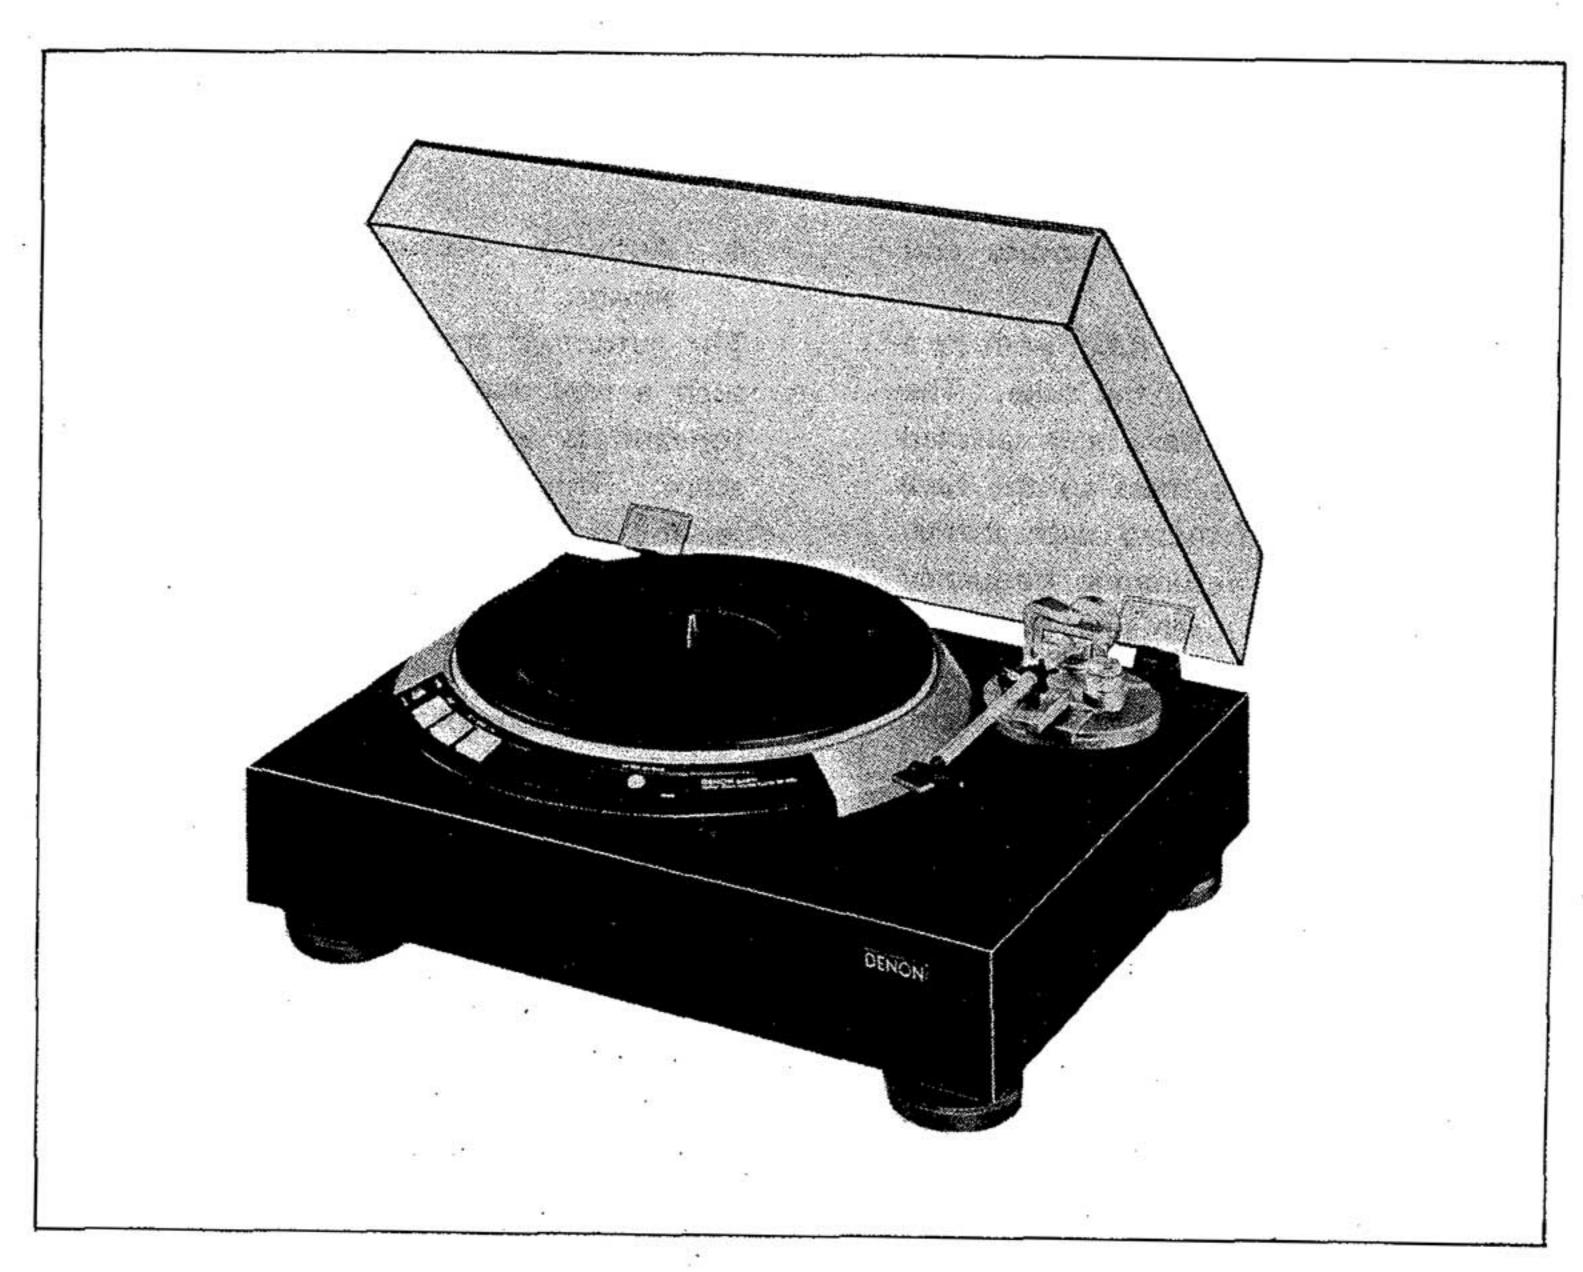

Model DP-60L

NIPPON COLUMBIA CO., LTD.

# TABLE OF CONTENTS

·	1
FEATURES	1
NAMES OF PARTS AND FUNCTION	2
ADJUSTMENT	
TO CHANGE THE OPERATIONAL VOLTAGES	
PARTS LIST OF KU-385 MOTOR SERVO AMP UNIT	5
PARTS LIST OF KU-356 ARM SERVO AMP UNIT	6
PARTS LIST OF KU-390 SWITCH UNIT	6
PARTS LIST OF PS-152 AND PS-155 FUSE UNITS	6
PARTS LIST OF PS-149 AND PS-153 POWER UNITS	
LEAD CONNECTION OF SEMICONDUCTORS	
EXPLODED VIEW OF TONEARM	
PACKING INSTRUCTION	8
CIRCUIT DIAGRAM	
PRINTED CIRCUIT BOARD	10
EXPLODED VIEW OF MAIN PARTS	11
PARTS LIST OF EXPLODED VIEW	12
MAIN SPECIFICATIONS	12
MAIN SPECIFICATIONS	13

#### **FEATURES**

#### Low mass type tonearm improves trackability and fidelity.

The head shell is integrated into the arm tube, with its a connector portion located at the base of the tube. The construction materials for this tonearm have been selected very carefully to reduce the effective mass to the bare minimum. As a result, even when mated with a high compliance cartridge, the low end resonance frequency  $(f_0)$  does not become too low but remains optimum. Clearer sound is achieved since the effects of record warpage and rotational excentricity are eliminated along with intermodulation distortion.

Since a straight shaped tonearm is almost symmetrical from side to side, dimensional or mechanical accuracies are improved. This design eliminates dimensional error or tortional distortion, making higher fidelity reproduction possible.

# 2. Replaceable S-shaped arm tube with standard 4P connector.

By replacing the low mass arm tube with the S-shape arm tube, the virtually all head shells or integrated cartridges/head shells can be utilized on the DP-60L. By having the ability to use the widest selection of cartridges, your audio enjoyment will be significantly broadened.

#### 3. Magnetic recording speed detection system.

The turntable platter speed of the DP-60L is detected by DENON's magnetic recording detection system. The detection frequency is high enough (1000 pulses per rotation) to allow ultra fast response of the servo loop. Overshoot and wow and flutter are virtually eliminated.


#### Auto-lift mechanism with non-contact record-end sensor.

The automatic arm lift (auto-lift) mechanism functions in such a way that when a record playback is finished, the tonearm is automatically lifted and the platter rotation stops. This eliminates the possibility of stylus wear by leaving it tracking the lead out record grooves. At the end of play, a non-contact record-end sensor senses the velocity change of the tonearm with an opto-electronic transducer, eliminating unnecessary load on the record or stylus. Sound quality is totally unaffected by this system.

#### 5. Angular control motor lifts tonearm.

The arm lifting device employs a servo-controlled angular control motor developed by **DENON**, for ultra-smooth and silent up and down motion.

- 6. PLL servo control via a quarts crystal oscillator guarantees speed accuracy of below 0.002%, and is almost totally immune to variation of temperature, humidity, load condition or supply voltage fluctuation.
- 7. The combination of Bi-directional servo control and electronic braking, together with rotational detection offers the quickest, smoothest start, stop and speed change-over.
- 8. Counterweight shaft is damped effectively to supress partial resonance of tonearm body.
- 9. The turntable mat was developed through vibration analysis through laser holography.

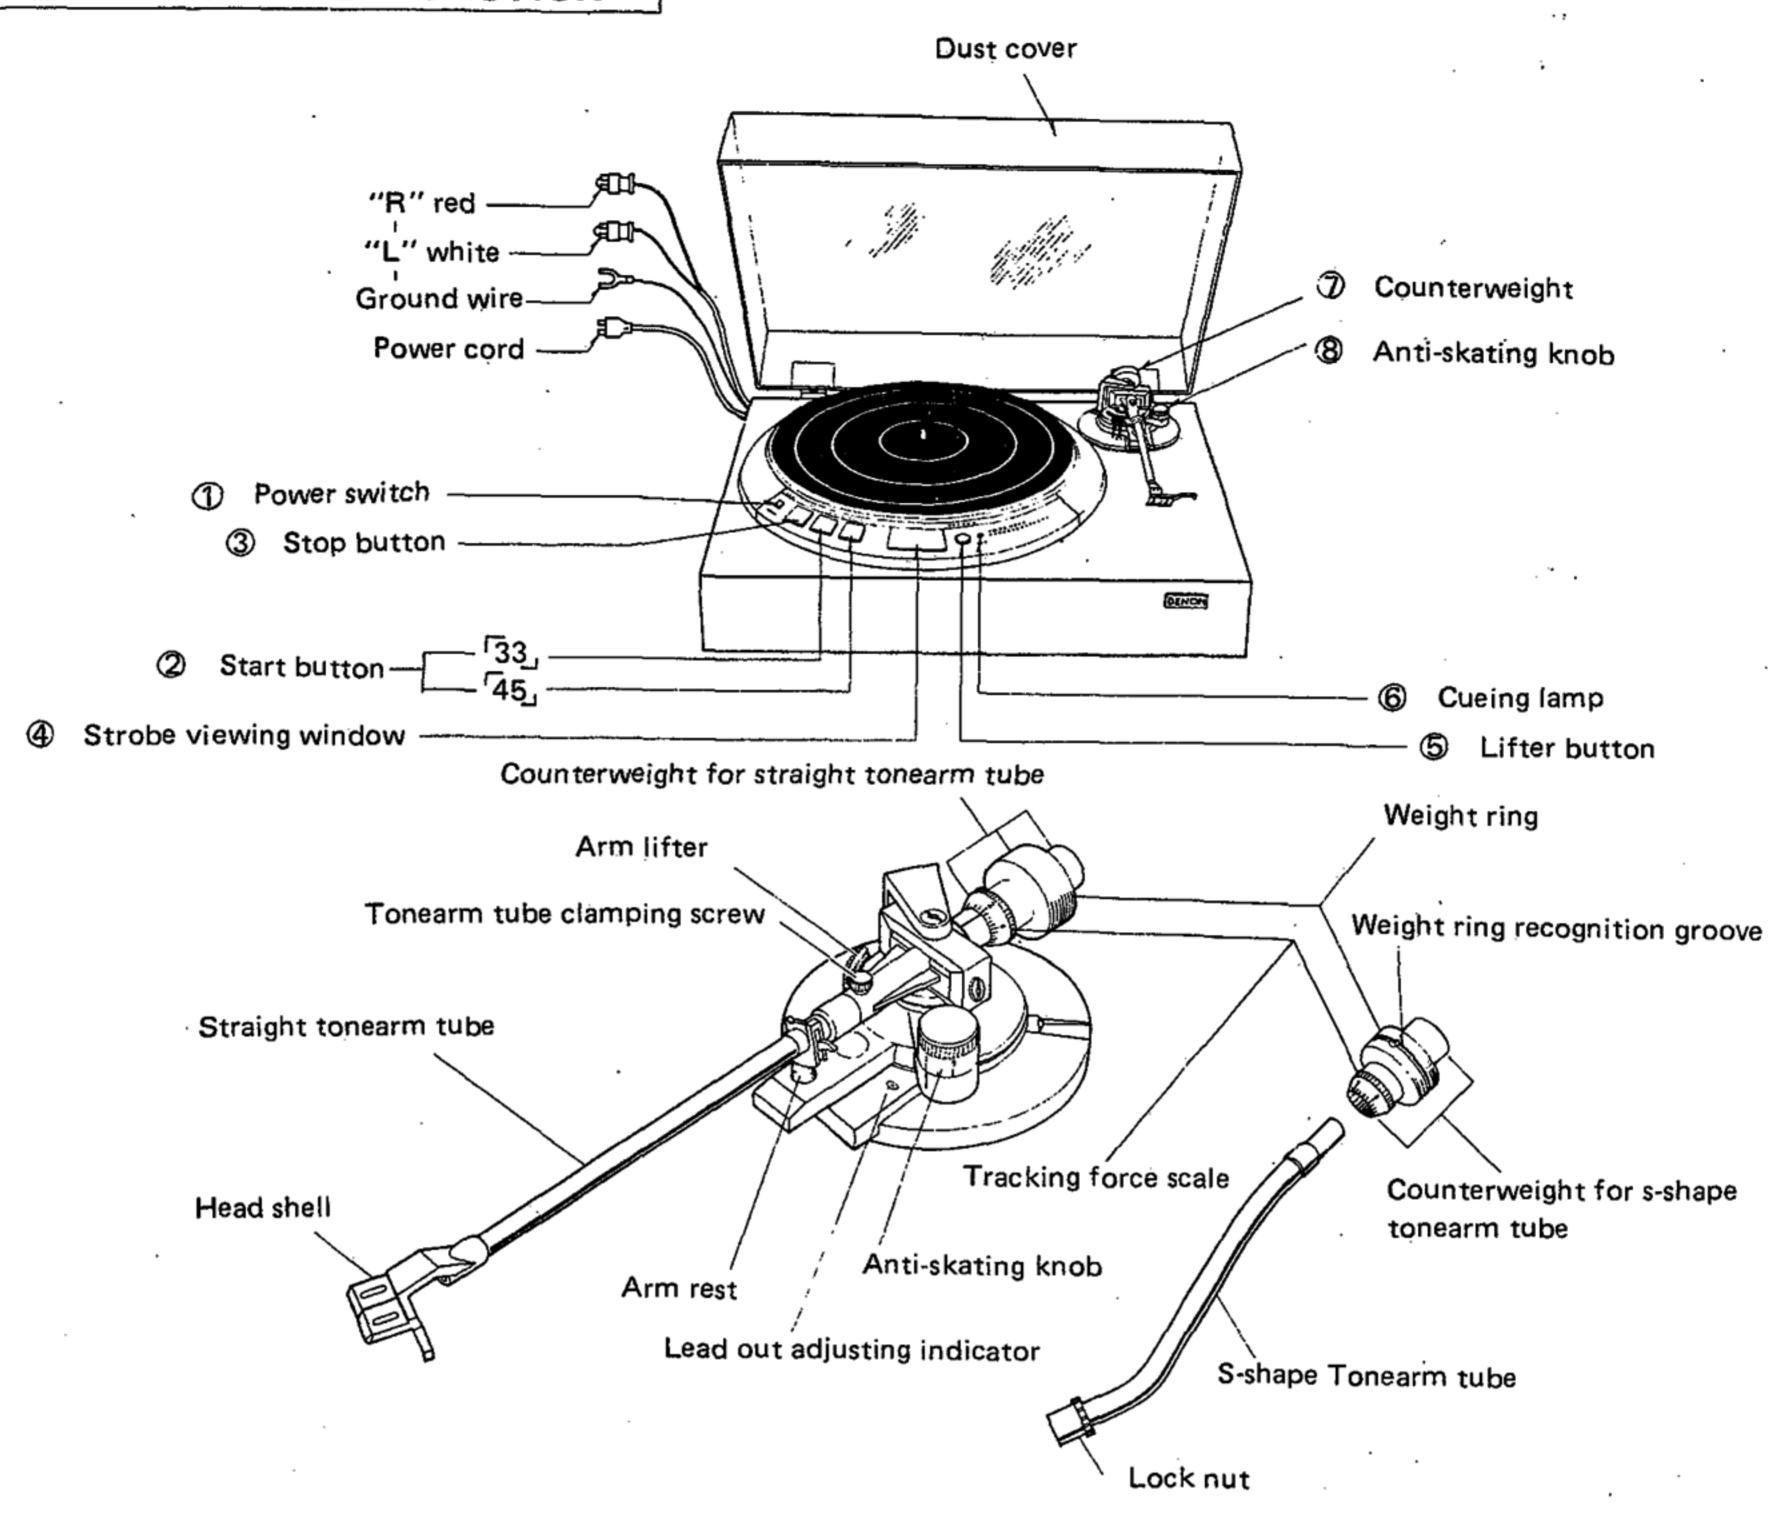

#### (1) Power switch

The power is turned on when the switch is pressed in (-). The lamps in the stop button and in the strobe viewing window will light. When pressed again (1), the power is turned off and lamps also turn off.

If the power switch is turned on (\_\_\_\_) while the arm lifter is down, the arm lifter will lift.

#### 2 Start buttons

Press

33 for a 33-1/3 rpm record, and

45 for a 45 rpm. record.

When one of the buttons is pressed, the lamp in the button lights and the platter starts rotation. Simultaneously, the arm lifter lowers.

#### (3) Stop button

When this button is pressed, the arm lifter lifts and then, after a few moments, the lamp in either the "33" or "45" buttons turns off. The lamp in the stop button will then light and the platter will stop.

#### NOTE 1:

The reason why the stop button lamp lights only after a brief delay is as follows. When the stop button is pressed, the arm lifter starts lifting immediately. However, since there is a small gap between the arm lifter and the arm tube, a time lag exists until the stylus leaves the disc. This record player is designed so that normal speed is maintained during this period before the platter stops.

#### NOTE 2:

If the start button is pressed right after the stop button is pressed, the lamp in the stop button may light and the platter will stop. Therefore, when changing speed during rotation, it is advisable to press the start button of either "33" or "45" directly without pressing the stop button.

#### 4 Strobe viewing window

When the platter is rotating at a specified speed, the strobe pattern observed through this window should appear to be standing still.

#### (5) Lifter button

Each time this button is pressed, the arm lifter moves up and down.

## 6 Cueing lamp

This lamp lights while the arm lifter is down.

#### (7) Counterweight

Turning this weight adjusts the traking force.

#### (8) Anti-skating knob

By adjusting this knob, a force is applied towards the outside of the disc at the stylus tip.


#### **ADJUSTMENT**

#### Adjustment of spacing between detection head and platter:

Adjust the spacing so that it may represent abt. 0.15 mm between the magnet-coated surface of platter and detection head. Depending upon the degree of the spacing, the condition of stop will vary. Consequently, adjustment should be made in such a way that the platter without the turntable sheet on glides slightly forward when stopping.

#### NOTE:

When the magnetic head is replaced, make sure that the terminal connection is as shown in the figure below. Otherwise, the platter may turn reversely.

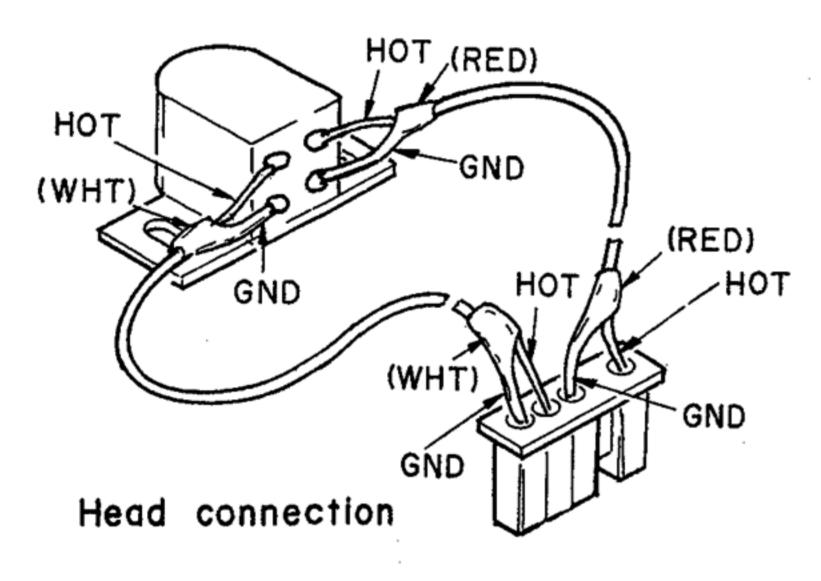


#### 2. Confirming the regulator voltage:

Since the power source employs a fixed voltage 3-terminal IC, confirm that the output voltage of IC5 and represents 5V±0.2V. (No adjustment is feasible.)


#### 3. RPM Adjustment:

- (1) Pull out the lead wire through test points 39 and 41 (3P connecting pin) on motor servo P.C. Board KU-385 and connect 39 to positive side of the oscilloscope while 41, earth side.
- (2) Adjust the speed to 45 RPM; observing the waveform by means of an oscilloscope, Adjust VR2 so that the pulse may occur at the 40% position from the left of the pulse side of the half-cycle in a cycle of a square wave as shown in the figures below.
- (3) Subsequently adjust VR1 for 33 RPM in the same manner as in the case of 45 RPM so that the pulse may be positioned at 40% of the square wave cycle.

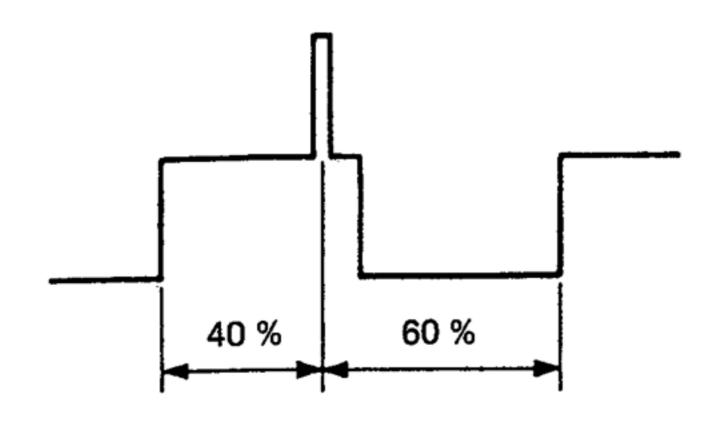

#### (Reference)

Following are the waveforms of test points 39-40 and 41-40: (Test Point 40 is grownd.)

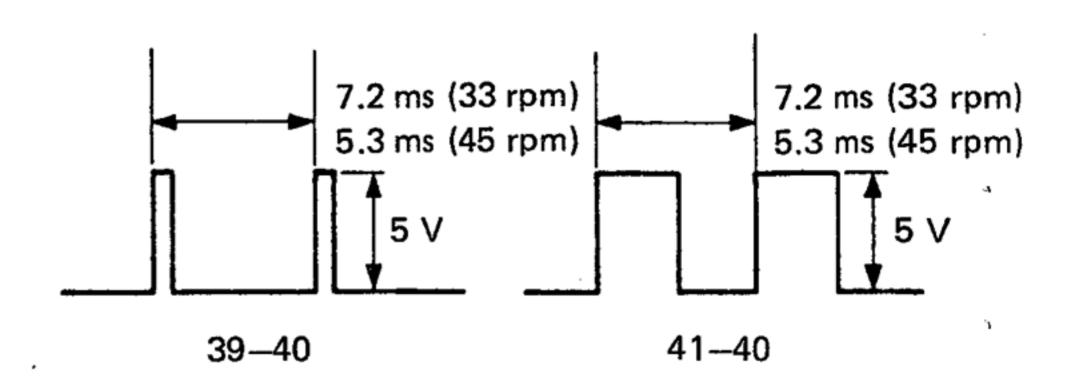


#### 4. Arm lifter height adjustment:

Arm lifter is so designed as to move upward and downward together with the arm when its height is adjusted. Although the adjustment is carried out in the plant before shipment, if re-adjustment is required, the height can be re-adjusted in the following manner:

- (1) Loosen the arm lifter height adjusting screws

  Depress lifter button to light the cueing lamp
  and lower the arm lifter.
- (2) Place the stylus point on the record surface and adjust the clearance between the arm lifter and arm tube to be 0.5~1.0 mm by moving the arm lifter vertically, and then tighten the height adjusting screw.

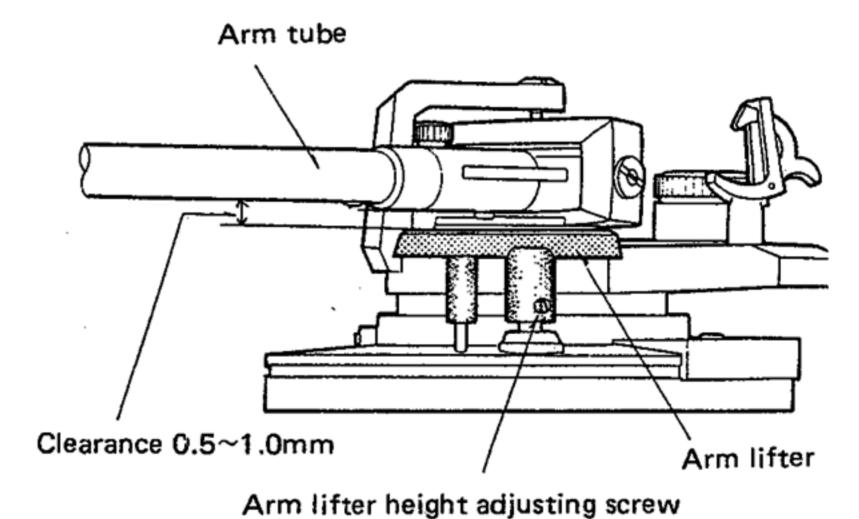

#### 5. End adjustment (lead-out adjustment):

The end adjustment has been carried out in the plant prior to shipment with respect to the straight arm tube. If, however, re-adjustment is required, adjust in the following manner:

- (1) Turn the anti-skating knob to '0'.
- (2) Confirm that the cueing lamp is off. If it is lit, depress the lifter button so that the arm lifter is kept up.
- (3) Set the cartridge stylus point to position 53 mm from the motor shaft by the use of accessory overhang gauge.
- (4) Turn the lead-out adjusting screw with a screwdriver so as to allow the lead-out adjusting indicator to light.

#### NOTE 1.

If the auto-lift operates normally, there is no necessity for re-adjustment even if the lead-out adjusting indicator fails to light when the stylus point is set in a 53 mm position from the motor shaft.


#### NOTE 2.

Although the lead-out adjusting indicator may light on or off immediately before the end of the 17 cm disc performance, there is no drawback as regards the mechanical performance since the stylus point has approached the 53mm area.



(Adjust when IC1 (KU-356) is replaced.)

- (1) Make a short circuit between the both ends of R46 of arm servo P.C. board KU-356, between TR6 base and earth, and between TR9 base and earth.
- (2) Adjust VR1 so that the d.c. voltage at terminal 14 of IC1 may represent 1.4±0.1V.

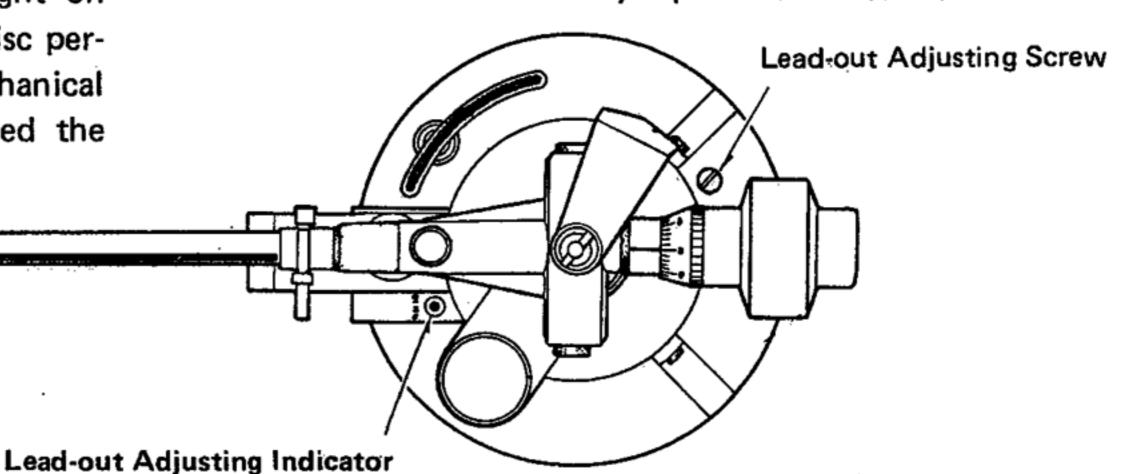


#### TO CHANGE THE OPERATIONAL VOLTAGES

# A. Model whose voltage selector is accessible by the user: (Multi-voltage model)

This equipment has been preset for a line voltage of 220V. Before inserting the power plug, please check if this voltage corresponds with the line voltage in your area. If it does not, be sure to adjust the voltage selector switch to the proper setting before operating this equipment. The voltage selector switch is located on the base surface below the turntable platter. Simply insert a screw driver into the voltage selector switch and turn it in either direction so that the desired voltage marked on the switch is positioned in the window.

Damage of equipment because of missetting of voltage selector is not within the limit of **DENON** liability.

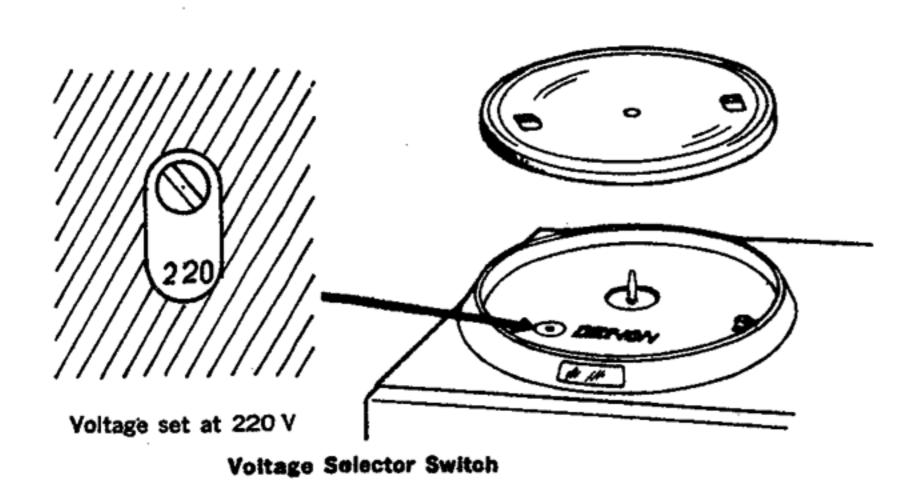

Set the voltage selector in accordance with the nominal power supply voltage as shown in the table.

ACTUAL (nominal) VOLTAGE (volt)	VOLTAGE SETTING
110 115 120	120
200	200
210 220	220
230 240	240

# B. Models whose voltage selector is not accessible by the user:

(Australian, UK and Canadian models)

#### 1 Australian and UK models

Although these models are provided with the voltage selector being preset to 240V, it cannot be operated by the user since it is blinded by the shield cover. However, in case the change of voltage setting is necessary, insert a screw driver into the voltage selector and turn it in either direction so that the desired voltage indicated on the selector is positioned at the cut-out marking as shown in figure below.



#### 2 Canadian model

Although this model is provided with the voltage selector being preset to 120V, it cannot be operated by the user since it is blinded by the shield cover.

Since the Canadian model must comply with the CSA standards, the components directly connected to the power line are CSA recognized having 125VAC rating. Therefore, DO NOT change the voltage setting.

## KU-385 MOTOR SERVO AMP UNIT

SEMI CONDUCTOR GROUP   IC3					
IC3	T	Ref. No.	Part. No.	Part Name	Remark
IC4		SEMI COND	UCTOR GROU	JP	
IC4	$\vdash$	103	2620186001	SC3120A ·	
IC1, 2   2630094028   TA7122BP (C)   IC5   2680009005   FS-7806M   HD742BP   IC7   262089001   HD742BP   IC7   2720025004   ZSA899 (R)   TR16, 18   2720046009   ZSA899 (R)   TR17   TR17   2720025004   ZSB662 (C)   ZSB661 (C)   ZSB661 (C)   ZSC488 (D)   ZSC48 (D)   ZSC488 (D)   ZSC488 (D)   ZSC488 (D)   ZSC488 (D)   ZSC48 (D)   ZSC488 (D)		-			ļ
IC5		•			
Terror   2620089001   HD7426P   Terror   2710100010   25A879				,	
TRB, 11, 15 TR17 TR16, 18 TR16, 18 TR16, 18 TR16, 14 TR16, 14 TR16, 14 TR16, 14 TR16, 14 TR16, 14 TR10, 13 TR10, 14 TR10, 13 TR10, 14 TR10, 13 TR10, 13 TR10, 13 TR10, 14 TR10, 13 TR10, 13 TR10, 13 TR10, 13 TR10, 13 TR10, 13 TR10, 14 TR10, 13 TR10, 14 TR10, 13 TR10, 13 TR10, 14 TR1			2620089001	HD7426P -	
TR17 TR16, 18 TR16, 18 TR16, 14 TR16, 14 TR16, 13 TR10, 14 TR10, 13 TR10, 14 TR10, 13 TR10, 14 TR10, 13 TR10, 14 TR10, 13 TR10, 14 TR10, 14 TR10, 13 TR10, 14 TR10, 14 TR10, 13 TR10, 14 TR10,		TR7,12	2710100010	2SA879 © (R)	
TR16, 18		TR8, 11, 15	2710113007	2SA999 (F)	
TR1~6, 14   2730021043   2SC458 (D)   TR10		TR17	2720025004	2SB562 (C)	
TR10, 13   2730196004   2SC2023 (Z)   TR19   2730111021   2SC1213 (C)   A		TR16, 18	2720046009	2SB561 (C)	
TR19		BOOK OF THE PROPERTY OF THE PR	CONTRACTOR SALES OF THE SALES O	15.000 CT (1.000 0.000 P.22) (2.000 F.200 P.200 P.	
D24, 27   2760280003   RB154   D23, 26   2760057029   V06E   D1-22, 2760049008   152076   V06E   D1-22, 27600049008   152076   V06A   D45   2760002003   1N60   LN81RP (HL)   LED   RESISTOR GROUP   RD1482E100J   RD1482E150J   15ΩJ % RD1482E100J   RD1482E390J   39ΩJ % RD1482E230J   39ΩJ % RD1482E230J   39ΩJ % RD1482E230J   39ΩJ % RD1482E230J   39ΩJ % RD1482E331J   330ΩJ % RD1482E391J   39ΩΩJ % RD1482E391J   39ΩΩJ % RD1482E391J   39ΩΩJ % RD1482E50J   RD1482E50J   RD1482E50J   RD1482E50J   RD1482E50J   RD1482E50J   RD1482E50J   RD1482E50J   RD1482E50J   RD1482E22J   2.2KΩJ % RD1482E332J   3.3KΩJ % RD1482E332J   3.3KΩJ % RD1482E392J   3.9KΩJ % RD1482E393J   3.9KΩJ % RD1	7	CRESCHER CONTRACTOR CO	在中国的1.00mm (1.5 ) · 国际的1.00mm (1.5 )	STATE OF THE PROPERTY OF THE P	
D23, 26	2	STATE OF THE PROPERTY OF THE PARTY OF THE PA	20 作为20 20 16 20 20 20 20 20 20 20 20 20 20 20 20 20	ASSESSMENT OF THE PROPERTY OF	
D1~22,	200	March and the second state of the second state		The work of the same of the sa	The state of the state of
### A17-44   D29~32   27600291005   2760002003   1N60   LN81RP (HL)   LED    ### RESISTOR GROUP  ### RESI	7	Control of the second s	AND THE RESIDENCE OF THE PARTY		
D29~32   2760291005   276002003   1N60   1N60   1N60   1N60   1N81RP (HL)   LED		•	2700049008	132070	
D45			2760291005	V06A	
RESISTOR GROUP   RES			1		
RESISTOR GROUP         Carbon film           R67, 69         2410266005         RD14B2E100J         10ΩJ		_		LN81RP (HL)	LED
R67, 69         2410266005         RD14B2E100J         Carbon film           R105         2410270004         RD14B2E150J         15ΩJ         %           R101, 102         2410280007         RD14B2E150J         39ΩJ         %           R66, 77         2410280007         RD14B2E390J         39ΩJ         %           R66, 77         2410290000         RD14B2E101J         100ΩJ         %           R85         2410302008         RD14B2E271J         270ΩJ         %           R72         2410304006         RD14B2E331J         330ΩJ         %           R86         2410306004         RD14B2E391J         39ΩΩJ         %           R86         2410308002         RD14B2E391J         39ΩΩJ         %           R87         2410308002         RD14B2E361J         560ΩJ         %           R88         2410314009         RD14B2E162J         1.5KΩJ         %           R818, 25, 32,         2410322004         RD14B2E132J         3.3KΩJ         %           R18, 25, 32,         2410326005         RD14B2E332J         3.3KΩJ         %           R19, 23, 24,         2410332007         RD14B2E332J         3.9KΩJ         %           R19, 54,         58, 89, 90, <td>+</td> <td></td> <td>BOUP</td> <td></td> <td><u> </u></td>	+		BOUP		<u> </u>
R67, 69         2410266005         RD1482E100J         10ΩJ %           R105         2410270004         RD1482E150J         15ΩJ %           R101, 102         2410280007         RD1482E390J         39ΩJ %           R66, 77         2410280001         RD1482E680J         68ΩJ %           R68, 78, 106         2410290000         RD1482E2101J         100ΩJ %           R85         2410300000         RD1482E331J         330ΩJ %           R86         2410306004         RD1482E391J         390ΩJ %           R86         2410306004         RD1482E391J         390ΩJ %           R86         2410314009         RD1482E561J         560ΩJ %           R82~84         2410314009         RD1482E162J         15ΚΩJ %           R818, 25, 32,         2410322004         RD1482E162J         1.5ΚΩJ %           R18, 25, 32,         2410322004         RD1482E332J         3.3ΚΩJ %           R19, 23, 24,         2410328008         RD1482E332J         3.3ΚΩJ %           R19, 23, 24,         2410330009         RD1482E392J         3.9ΚΩJ %           R19, 54,         58, 89, 90,         91         RD1482E562J         5.6ΚΩJ %           R22         2410334005         RD1482E562J         6.8ΚΩJ % <td>-</td> <td>ALGISTOR (</td> <td></td> <td></td> <td>Carbon film</td>	-	ALGISTOR (			Carbon film
R105         2410270004         RD14B2E150J         15ΩJ         39ΩJ         39ΩJ <td></td> <td>D67 60</td> <td>2410266006</td> <td>RD1//R2E100 I</td> <td></td>		D67 60	2410266006	RD1//R2E100 I	
R101, 102         2410280007         RD14B2E390J         39ΩJ         30ΩJ         30		•			15ΩJ ¼W
R66, 77         2410286001         RD14B2E680J         68ΩJ         3           R68,78,106         2410290000         RD14B2E101J         100ΩJ         3           R85         2410300000         RD14B2E331J         330ΩJ         3           R92~94         2410304006         RD14B2E331J         330ΩJ         3           R86         2410306004         RD14B2E331J         390ΩJ         4           R86         2410314009         RD14B2E561J         560ΩJ         4           R81         2410318005         RD14B2E102J         1KΩJ         4           R82~84         2410318005         RD14B2E152J         1.5KΩJ         4           R18, 25, 32,         2410322004         RD14B2E532J         3.3KΩJ         4           R19, 23, 24,         2410328008         RD14B2E332J         3.9KΩJ         4           R19, 23, 24,         2410328008         RD14B2E392J         3.9KΩJ         4           R1, 9, 54,         2410332007         RD14B2E662J         6.8KΩJ         4           R22         2410334005         RD14B2E682J         6.8KΩJ         4           R26, 39, 43,         2410342000         RD14B2E13J         15KΩJ         22KΩJ         4					39ΩJ ¼W
R68,78,106         2410290000         RD14B2E101J         100ΩJ         270ΩJ		•			68ΩJ ¼W
R85         2410300000         RD14B2E271J         270ΩJ ½           R72         2410302008         RD14B2E331J         330ΩJ ½           R86         2410306004         RD14B2E391J         390ΩJ ½           R86         2410308002         RD14B2E51J         560ΩJ ½           R88         2410318005         RD14B2E102J         1KΩJ ½           R82~84         R18, 25, 32,         A1, 42, 64,         RD14B2E152J         1.5KΩJ ½           R6, 79, 80,         2410322004         RD14B2E332J         3.3KΩJ ½           R19, 23, 24,         2410326005         RD14B2E332J         3.3KΩJ ½           R8, 89, 90,         91         RD14B2E332J         3.9KΩJ ½           R6, 14         2410332007         RD14B2E562J         5.6KΩJ ½           R22         2410334005         RD14B2E682J         6.8KΩJ ½           R26, 39, 43,         2410338001         RD14B2E163J         15KΩJ ½           R27         2410342000         RD14B2E163J         15KΩJ ½           R29, 35, 37,         R27, 10,         241034008         RD14B2E163J         15KΩJ ½           R27, 710,         2410354001         RD14B2E223J         22KΩJ ½           R56         2410370001         RD14B2E104J         100KΩJ	-	-			100ΩJ ¼W
R72         2410302008         RD14B2E331J         330ΩJ         390ΩJ					270ΩJ ¼W
R86         2410306004         RD1482E471J         470ΩJ         360ΩJ			i	RD14B2E331J	330ΩJ ¼W
R5, 13         2410308002         RD14B2E561J         560ΩJ         1 KΩJ         1 KΩJ <td></td> <td></td> <td>2410304006</td> <td>RD14B2E391J</td> <td>390ΩJ ¼W</td>			2410304006	RD14B2E391J	390ΩJ ¼W
R88         2410314009         RD14B2E102J         1KΩJ %           R82~84         2410318005         RD14B2E152J         1.5KΩJ %           R18, 25, 32, 41, 42, 64, 76, 79, 80,         2410326005         RD14B2E222J         2.2KΩJ %           R19, 23, 24, 28, 70, 71         2410328008         RD14B2E332J         3.3KΩJ %           R19, 24, 2410328008         RD14B2E392J         3.9KΩJ %           S1         R1, 9, 54, 58, 89, 90, 91         RD14B2E472J         4.7KΩJ %           R6, 14         2410332007         RD14B2E562J         5.6KΩJ %           R22         2410334005         RD14B2E682J         6.8KΩJ %           R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75         R95, 96         RD14B2E103J         10KΩJ %           R27         2410342000         RD14B2E183J         18KΩJ %           R29, 35, 37, R2, 7, 10, 15, 38, 103, 104         R3, 11, 33, 34, 40         R3, 11, 33, 34, 40         RD14B2E104J         100KΩJ %           R36, 87         2410366002         RD14B2E154J         150KΩJ %           R36, 87         2410370001         RD14B2E224J         220KΩJ %           R4, 12, 57         2410378003         RD14B2E474J         470KΩJ %		R86	2410306004	RD14B2E471J	470ΩJ ¼W
R82~84       2410318005       RD14B2E152J       1.5KΩJ       22KΩJ       22CKΩJ       22CKΩ	1	R5, 13	2410308002	RD14B2E561J	560ΩJ ¼W
R18, 25, 32, 41, 42, 64, 76, 79, 80,       2410322004       RD14B2E222J       2.2KΩJ ½         R19, 23, 24, 28, 70, 71       2410328008       RD14B2E332J       3.3KΩJ ½         R19, 23, 24, 28, 70, 71       2410328008       RD14B2E392J       3.9KΩJ ½         R1, 9, 54, 58, 89, 90, 91       2410330009       RD14B2E472J       4.7KΩJ ½         R2, 7, 10, 15, 38, 103, 104       2410342000       RD14B2E562J       5.6KΩJ ½         R2, 7, 10, 15, 38, 103, 104       R3, 11, 33, 34, 40       RD14B2E154J       150KΩJ ½         R36, 87       2410366002       RD14B2E154J       150KΩJ ½         R56       2410378003       RD14B2E2474J       150KΩJ ½         R56       2410378003       RD14B2E474J       470KΩJ ½         R56       2410378003       RD14B2E474J       470KΩJ ½	١	R88			1KΩJ ¼W
41, 42, 64, 76, 79, 80,       76, 79, 80,         R19, 23, 24, 28, 70, 71       28, 70, 71         R20, 45, 48, 51       2410328008       RD14B2E392J       3.9KΩJ ½         R1, 9, 54, 58, 89, 90, 91       2410330009       RD14B2E472J       4.7KΩJ ½         R22 2410334005       RD14B2E562J       5.6KΩJ ½         R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75       R95, 96       2410342000       RD14B2E183J       15KΩJ ½         R29, 35, 37, R2, 7, 10, 15, 38, 103, 104       R3, 11, 33, 34, 40       R3, 11, 33, 34, 40       R366002       RD14B2E104J       100KΩJ ½         R36, 87 2410366002       RD14B2E154J       RD14B2E224J       220KΩJ ½         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ½	-	_	,		1.5KΩJ ¼W
76, 79, 80,       R19, 23, 24, 2410326005       RD14B2E332J       3.3KΩJ ½         28, 70, 71       R20, 45, 48, 51       2410328008       RD14B2E392J       3.9KΩJ ½         81, 9, 54, 58, 89, 90, 91       2410332007       RD14B2E472J       4.7KΩJ ½         822       2410334005       RD14B2E682J       5.6KΩJ ½         826, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75       R95, 96       2410342000       RD14B2E163J       15KΩJ ½         827       2410344008       RD14B2E183J       18KΩJ ½         829, 35, 37, 2410346006       RD14B2E183J       18KΩJ ½         82, 7, 10, 15, 38, 103, 104       RD14B2E473J       47KΩJ ½         83, 11, 33, 34, 40       R36, 87       2410366002       RD14B2E164J       100KΩJ ½         R56       2410370001       RD14B2E224J       220KΩJ ½         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ½			2410322004	RD14B2E222J	2.2KΩJ ¼W
R19, 23, 24, 28, 70, 71       2410326005       RD14B2E332J       3.3KΩJ ½         R20, 45, 48, 51       2410328008       RD14B2E392J       3.9KΩJ ½         R1, 9, 54, 58, 89, 90, 91       2410332007       RD14B2E472J       4.7KΩJ ½         R22       2410334005       RD14B2E562J       5.6KΩJ ½         R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75       R95, 96       2410342000       RD14B2E153J       15KΩJ ½         R27       2410344008       RD14B2E183J       18KΩJ ½         R29, 35, 37, R2, 7, 10, 15, 38, 103, 104       2410354001       RD14B2E223J       22KΩJ ½         R3, 11, 33, 34, 40       R36, 87       2410366002       RD14B2E154J       100KΩJ ½         R56       2410370001       RD14B2E224J       220KΩJ ½         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ½					,
28, 70, 71 R20, 45, 48, 51 R1, 9, 54, 58, 89, 90, 91 R6, 14 R22 R22 R2410332007 R22 R2410334005 R25, 2410338001 R014B2E562J R014B2E682J R014B2E103J R014B2E103J R014B2E103J R014B2E103J R014B2E183J R014B2E23J R014B2E23J R014B2E23J R014B2E23J R014B2E23J R014B2E23J R014B2E23J R014B2E23J R014B2E173J R014B2E173J R014B2E173J R014B2E173J R014B2E183J R014B2E183J R014B2E183J R014B2E183J R014B2E173J R014B2E173J R014B2E223J R014B2E223J R014B2E223J R014B2E223J R014B2E223J R014B2E223J R014B2E2473J R014B2E2473J R014B2E2473J R014B2E2473J R014B2E2473J R014B2E2473J R014B2E2473J R014B2E2473J R014B2E2473J R014B2E2474J R014B2E244J R014B2E474J R014B2E474J R014B2E244J R014B2E474J		76, 79, 80,			
28, 70, 71 R20, 45, 48, 51 R1, 9, 54, 58, 89, 90, 91 R6, 14 R22 R2410332007 R22 R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75 R95, 96 R27 R29, 35, 37, R2, 7, 10, 15, 38, 103, 104 R3, 11, 33, 34, 40 R36, 87 R36 R37 R4, 12, 57 R410332007 RD14B2E392J RD14B2E472J A.7KΩJ ½ RD14B2E562J RD14B2E682J RD14B2E682J RD14B2E103J RD14B2E103J RD14B2E153J RD14B2E183J RD14B2E183J RD14B2E223J RD14B2E223J RD14B2E273J RD14B2E473J RD14B2E473J RD14B2E104J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E224J		D10 22 24	2410326005	BD1482E3321	3 3KO 1 1/W
R20, 45, 48, 51       2410328008       RD14B2E392J       3.9KΩJ ½         R1, 9, 54, 58, 89, 90, 91       2410332007       RD14B2E472J       4.7KΩJ ½         R22 2 2410334005       RD14B2E562J       5.6KΩJ ½         R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75       2410342000       RD14B2E163J       10KΩJ ½         R27 2410344008       RD14B2E183J       18KΩJ ½         R29, 35, 37, R2, 7, 10, 15, 38, 103, 104       2410354001       RD14B2E104J       22KΩJ ½         R36, 87 2410366002       RD14B2E154J       100KΩJ ½         R56 2410370001       RD14B2E224J       150KΩJ ½         R014B2E224J       220KΩJ ½         R014B2E2474J       470KΩJ ½		, ,	2710320005	HD PDZESSZJ ·	J.515,865 /4VV
51       R1, 9, 54, 58, 89, 90, 91       2410332007       RD14B2E472J       4.7KΩJ ½         R6, 14       2410332007 2410334005       RD14B2E562J RD14B2E682J RD14B2E682J RD14B2E682J RD14B2E103J       5.6KΩJ ½         R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75       2410342000 RD14B2E153J RD14B2E183J RD14B2E183J RD14B2E183J RD14B2E183J RD14B2E223J RD14B2E223J RD14B2E223J RD14B2E223J RD14B2E2473J       15KΩJ ½         R27, 7, 10, 15, 38, 103, 104       2410354001 RD14B2E104J RD14B2E104J RD14B2E104J RD14B2E104J RD14B2E104J RD14B2E104J RD14B2E154J RD14B2E154J RD14B2E224J RD14B2E2474J RD14B2E2474J RD14B2E474J RD14B			2410328008	RD14B2E3921	3.9KΩJ ¼W
R1, 9, 54, 58, 89, 90, 91       2410332007       RD14B2E562J       4.7KΩJ       4.7CΩJ			25525555		7,013,000 /411
58,89,90, 91 R6,14 R22 2410334005 R26,39,43, 46,47,49, 50,52,53, 55,65,75 R95,96 R27 R29,35,37, R2,7,10, 15,38, 103,104 R3,11,33, 34,40 R36,87 R56 R4,12,57 RD14B2E562J RD14B2E562J RD14B2E682J RD14B2E682J RD14B2E103J 10ΚΩJ ¼ RD14B2E153J RD14B2E153J RD14B2E183J RD14B2E223J RD14B2E223J RD14B2E223J RD14B2E223J RD14B2E473J 100ΚΩJ ¼ RD14B2E104J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E24J RD14B2		-	2410330009	RD14B2E472J	4.7KΩJ ¼W
91 R6, 14 R22 2410332007 R22 R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75 R95, 96 R27 R29, 35, 37, R2, 7, 10, 15, 38, 103, 104 R3, 11, 33, 34, 40 R36, 87 R4, 12, 57 R910332007 RD14B2E562J RD14B2E682J RD14B2E682J RD14B2E103J RD14B2E103J RD14B2E153J RD14B2E153J RD14B2E183J RD14B2E183J RD14B2E223J RD14B2E223J RD14B2E223J RD14B2E223J RD14B2E473J RD14B2E104J RD14B2E104J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E154J RD14B2E224J RD14B2E2474J RD14B2E3474J RD14B2B3474J RD14B3474B3474J RD14B3474B3474B3474B3474B3474B3474B3474B34					
R22       2410334005       RD14B2E682J       6.8KΩJ ½         R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75       R95, 96       2410342000       RD14B2E153J       15KΩJ ½         R27       2410344008       RD14B2E183J       18KΩJ ½         R29, 35, 37, R2, 7, 10, 15, 38, 103, 104       2410354001       RD14B2E223J       22KΩJ ½         R3, 11, 33, 34, 40       R36, 87       2410362006       RD14B2E104J       100KΩJ ½         R56       2410378003       RD14B2E224J       220KΩJ ½         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ½	ł				
R22       2410334005       RD14B2E682J       6.8KΩJ ½         R26, 39, 43, 46, 47, 49, 50, 52, 53, 55, 65, 75       R95, 96       2410342000       RD14B2E153J       15KΩJ ½         R27       2410344008       RD14B2E183J       18KΩJ ½         R29, 35, 37, R2, 7, 10, 15, 38, 103, 104       2410354001       RD14B2E223J       22KΩJ ½         R3, 11, 33, 34, 40       2410362006       RD14B2E104J       100KΩJ ½         R36, 87       2410366002       RD14B2E154J       150KΩJ ½         R56       2410378003       RD14B2E474J       470KΩJ ½         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ½		R6, 14	2410332007	RD14B2E562J	5.6KΩJ ¼W
46, 47, 49, 50, 52, 53, 55, 65, 75 R95, 96 2410342000 RD14B2E153J 15KΩJ ¼ RD14B2E183J 18KΩJ ¼ RD14B2E223J 22KΩJ ¼ RD14B2E223J 22KΩJ ¼ RD14B2E473J 47KΩJ ¼ 15, 38, 103, 104 R3, 11, 33, 2410362006 RD14B2E104J 100KΩJ ¼ 34, 40 R36, 87 2410366002 RD14B2E154J 150KΩJ ¼ RD14B2E224J RD14B2E224J 220KΩJ ¼ RD14B2E224J 220KΩJ ¼ RD14B2E224J 470KΩJ ¼ RD14B2E274J 470KΩJ ¼ RD14B2E474J 470KΩJ ¼ RD14B2E		_	2410334005		6.8KΩJ ¼W
50, 52, 53, 55, 65, 75 R95, 96 2410342000 RD14B2E153J 15KΩJ ¼ R27 2410344008 RD14B2E183J 18KΩJ ¼ R29, 35, 37, 2410346006 RD14B2E223J 22KΩJ ¼ R2, 7, 10, 2410354001 RD14B2E473J 47KΩJ ¼ 15, 38, 103, 104 R3, 11, 33, 34, 40 R36, 87 2410362006 RD14B2E104J 100KΩJ ¼ R56 2410370001 RD14B2E224J 220KΩJ ¼ R4, 12, 57 2410378003 RD14B2E474J 470KΩJ ¼		R26, 39, 43,	2410338001	RD14B2E103J	10KΩJ ¼W
55, 65, 75         R95, 96       2410342000       RD14B2E153J       15KΩJ ½         R27       2410344008       RD14B2E183J       18KΩJ ½         R29, 35, 37,       2410346006       RD14B2E223J       22KΩJ ½         R2, 7, 10,       2410354001       RD14B2E473J       47KΩJ ½         R3, 11, 33,       2410362006       RD14B2E104J       100KΩJ ½         R36, 87       2410366002       RD14B2E154J       150KΩJ ½         R56       2410370001       RD14B2E224J       220KΩJ ½         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ½		, , ,			
R95, 96       2410342000       RD14B2E153J       15KΩJ ½         R27       2410344008       RD14B2E183J       18KΩJ ½         R29, 35, 37,       2410346006       RD14B2E223J       22KΩJ ½         R2, 7, 10,       2410354001       RD14B2E473J       47KΩJ ½         15, 38,       103, 104       R3, 11, 33,       2410362006       RD14B2E104J       100KΩJ ½         R36, 87       2410366002       RD14B2E154J       150KΩJ ½         R56       2410370001       RD14B2E224J       220KΩJ ½         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ½			.	•	
R27       2410344008       RD14B2E183J       18KΩJ ¼         R29, 35, 37,       2410346006       RD14B2E223J       22KΩJ ¼         R2, 7, 10,       2410354001       RD14B2E473J       47KΩJ ¼         15, 38,       103, 104       RD14B2E104J       100KΩJ ¼         R3, 11, 33,       2410362006       RD14B2E104J       100KΩJ ¼         R4, 40       RD14B2E154J       150KΩJ ¼         R56       2410370001       RD14B2E224J       220KΩJ ¼         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ¼		•	04400:4000	DD44D05450:	45140 1 400
R29, 35, 37,       2410346006       RD14B2E223J       22KΩJ ¼         R2, 7, 10,       2410354001       RD14B2E473J       47KΩJ ¼         15, 38,       103, 104       RD14B2E104J       100KΩJ ¼         R3, 11, 33,       2410362006       RD14B2E104J       100KΩJ ¼         R36, 87       2410366002       RD14B2E154J       150KΩJ ¼         R56       2410370001       RD14B2E224J       220KΩJ ¼         R4, 12, 57       2410378003       RD14B2E474J       470KΩJ ¼		•			15KΩJ ¼W
R2, 7, 10, 2410354001 RD14B2E473J 47KΩJ ¼ 15, 38, 103, 104 R3, 11, 33, 2410362006 RD14B2E104J 100KΩJ ¼ 34, 40 R36, 87 2410366002 RD14B2E154J 150KΩJ ¼ R56 2410370001 RD14B2E224J 220KΩJ ¼ R4, 12, 57 2410378003 RD14B2E474J 470KΩJ ¼		•			
15, 38, 103, 104 R3, 11, 33, 2410362006 RD14B2E104J 100KΩJ ¼ 34, 40 R36, 87 2410366002 RD14B2E154J 150KΩJ ¼ R56 2410370001 RD14B2E224J 220KΩJ ¼ R4, 12, 57 2410378003 RD14B2E474J 470KΩJ ¼		• • •	, ,		
103, 104 R3, 11, 33, 2410362006 RD14B2E104J 100KΩJ ¼ 34, 40 R36, 87 2410366002 RD14B2E154J 150KΩJ ¼ R56 2410370001 RD14B2E224J 220KΩJ ¼ R4, 12, 57 2410378003 RD14B2E474J 470KΩJ ¼		•	2410354001	ווט ואָטער 199	-7/1000 /4VV
R3, 11, 33, 2410362006 RD14B2E104J 100KΩJ ¼ 34, 40 R36, 87 2410366002 RD14B2E154J 150KΩJ ¼ R56 2410370001 RD14B2E224J 220KΩJ ¼ R4, 12, 57 2410378003 RD14B2E474J 470KΩJ ¼		•			
34,40 R36,87 2410366002 RD14B2E154J 150KΩJ ¼ R56 2410370001 RD14B2E224J 220KΩJ ¼ R4,12,57 2410378003 RD14B2E474J 470KΩJ ¼		•	2410362006	RD14B2E104J	100KΩJ ¼W
R36,872410366002RD14B2E154J150KΩJ ¼R562410370001RD14B2E224J220KΩJ ¼R4,12,572410378003RD14B2E474J470KΩJ ¼		•	21,0002000		.0011400 /477
R56 2410370001 RD14B2E224J 220KΩJ ¼ R4, 12, 57 2410378003 RD14B2E474J 470KΩJ ¼		•	2410366002	RD14B2E154J	150KΩJ ¼W
R4, 12, 57 2410378003 RD14B2E474J 470KΩJ ¼		•	1		220KΩJ ¼W
1			1		470KΩJ ¼W
		, ,	2410759004	RD14B2E564J	560KΩJ ¼W
	ا		Ll		

	Ref. No.	Part. No.	Part Name	Remark
	R62	2410761005	RD14B2E684J	680KΩJ ¼W
ı	R63, 73	2410765001	RD14B2E105J	1MΩJ ¼W
				Metal film
1	R60	2452180000	RN14K2E821F	820ΩF ¼W
	R97 ·	2452199004	RN14K2E472F	4.7KΩF ¼W
1	R98	2452214002	RN14K2E203F	20KΩF ¼W
	R61	2452221008	RN14K2E393F	39KΩF 1/W
	R59	2452225004	RN14K2E563F	56KΩF %W
. [				Metal oxide
△]	R74,81	2440005029	RS14B3A010JNB	1ΩJ 1W
ĺ				Variable resistor
- 1	VR1, 2	EP-5462-13	SOLID VOLUME	10ΚΩΒ
ŀ				
-	CAPACITOR	GROUP		
				Electrolitic
ļ	C2, 7, 45	2544009002	CE04W1A470=	47µF 10∨
	C4, 5, 9, 10,	2544015009	CE04W1C100=	10μF 16V
	17			
}	C28	2544054002	CE04W1C220=	22μF 16V
	C27, 29	2544018006	CE04W1C101=	100µF 16∨
1	C31	2544086009	CE04W1E222=	2.200µF 25∨
	C1, 6, 22, 46	2544043000	CE04W1HR47=	0.47µF 50V
-	C25, 26	2544044009	CE04W1H010=	1μF 50V
				Film
- 1	C18	2551062003	CQ93M1H152K	0.0015µF 50V
1	C50	2551064001	CQ93M1H222K	0.0022µF 50V
	C14, 15	.2551070008	CQ93M1H682K	0.0068µF 50V
	C16	2551121038	CQ93M1H123K	0.012µF 50V
	C40, 41	2551076002	CQ93M1H223K	0.022µF 50∨
	C13	2551122011	CQ93M1H563J	0.056µF 50∨
1	C19	2551084007	CQ93M1H104K	0.1µF 50V
		•		Ceramic
	C20,21,48,49	2531004007	CK45B1H102K	0.001µF 50∨
l	C42~43	2531009002	CK45B1H682K	0.0068µF 50V
}	C23, 24	2531024003	CK45F1H103Z	0.01µF 50∨
	C30,	2531027000	CK45F1H104Z	0.1µF 50∨
İ	C11, 12	2533619005	CC45SL1H470J	47PF 50V
- {				Metalized Film
	C35	2568013029	CF99=2DAC305J	3µF AC200V
	OTHER PAR	TS GROUP		
- 1			CERVO AMB B C E	· · · · · · · · · · · · · · · · · · ·
I		2228179203	SERVO AMP P.C.	3
		4178020400	HEATSINK	EC 700EM
,	and the	4178050001	HEAT SINK	FS-7805M
اك		FEP0429K	SPARK KILLER	OM LI-
		2618007008	CRYSTAL	9MHz
	_	2050087026		TRANS Pri.
	-	005000004	TERMINAL	NAA INI D O D
		2050082047	4P WRAPPING	MAIN P.C.B
		000001000	TERMINAL	↔ S.W P.C.B
}	i	2058010008	6P WRAPPING	33/45,
			TERMINAL	STOP LAMP
		2035622008	3P MINI CONNE	TEST POINT
ŀ			PIN	
ļ	1	FEP12802	3P MINI CONNE	MOTOR
	1		PIN	
		FEP12803	4P MINI CONNE	HEAD
			PIN	
_				

⚠ WARNING:

Shaded parts are important to SAFETY. Replace always with same type, same rating.

#### **KU-356 ARM SERVO AMP UNIT**

Ref. No.	Part No.	Part Name	Remarks					
			Hemaiks					
SEMI CONDU	SEMI CONDUCTOR GROUP							
IC1, 2	2630076004	HA17901P						
TR11	2710141008	2SA768						
TR7,8	2720046009	2SB561 (C)	1					
TR1~6	2730021043	2SC458 (D)						
TR9, 10	2740038000	2SD467 (C)						
D1~4,6~9,	2760049008	1S2076						
12~15								
17, 19								
D18	2760218017	HZ-9A-2						
D16	3939079002	LN322GP	LED					
D5	3939023003	SEL101W	LED					
	3939019101	CDS						
RESISTOR G	ROUP							
		T	Carbon film					
R65, 66	2412036000	RD14B2E4R7J	4.7ΩJ ¼W					
R46	2412038008	RD14B2E5R6J	5.6ΩJ ¼W					
R24, 47	2412052000	RD14B2E220J	22ΩJ ¼W					
R60, 61, 64	2412056006	RD14B2E330J	33ΩJ ¼W					
R5, 70	2412050000	RD14B2E101J	100ΩJ ¼W					
1 '	2412074004	RD14B2E181J	180ΩJ ¼W					
R1, 19	2412074004	RD14B2E271J	270ΩJ ¼W					
R41, 69, 71	2412078000	RD14B2E471J	470ΩJ ¼W					
R23		RD14B2E4713						
R62, 63	2412088003		680ΩJ ¼W					
R4, 6, 14,	2412092002	RD14B2E102J	1KΩJ ¼W					
27, 40, 42,								
53, 59								
R48	2412096008	RD14B2E152J	1.5KΩJ ¼W					
R3, 28, 68	2412100004	RD14B2E222J	2.2KΩJ ¼W					
R50~52, 56	2412102002	RD14B2E272J	2.7KΩJ ¼W					
R9, 45	2412108006	RD14B2E472J	4.7KΩJ ¼W					
R8, 32~34,	2412116001	RD14B2E103J	10KΩJ ¼W					
29, 38, 39								
R16, 17, 26	2412124006	RD14B2E223J	22KΩJ ¼W					
31, 35, 37,								
55, 58								
R2, 15	2412128002	RD14B2E333J	33KΩJ ¼W					
R67	2412132001	RD14B2E473J	47KΩJ ¼W					
R11, 12	2412140006	RD14B2E104J	100KΩJ ¼W					
R43, 44	2412142004	RD14B2E124J	120KΩJ ¼W					
R7	2412146000	RD14B2E184J	180KΩJ ¼W					
R13	2412148008	RD14B2E224J	220KΩJ ¼W					
R25, 49	2412152007	RD14B2E334J	330KΩJ ¼W					
R10, 30	2412164008	RD14B2E105J	1MΩJ ¼W					
36, 54, 57	-							
			Metal film					
R20	2452191002	RN14K2E222F	2.2KΩf ¼W					
R18	2452202001	RN14K2E622F	6.2KΩF ¼W					
		,	Variable Resistor					
VR1	2116000015	V08PB103	10ΚΩΒ					
CAPACITOR	GROUP	:						
- Acrien								
		05041401404	Electrolitic					
C12	2544003008	CE04W0J101	100µF 6.3V					
C11	2544006005	CE04W0J471	470μF 6.3V					
C21	2544009002	CE04W1A470 =	47μF 10V					
C8	2544010004	CE04W1A101 =	100μF 10V					
C4	2549017002	CE04=1C100=	10μF 16V					
C2, 5	2544043000	CE04W1HR47=	0.47μF 50V					
15, 16	[							
C1, 19	2543014043	CE04D1C220MB	P 22μF 16V					
			Tantalum					
C17, 18	2541003001	CS45E0J100M	10μF 6.3V					

Ref. No.	Part No.	Part Name	Remarks
C6, 7, 20 C3, 9, 10 13, 14	2531026001 2531027000	CK45F1H473Z CK45F1H104Z	Ceramic 0.047μF 50V 0.1μF 50V
OTHER PA	RTS GROUP		
	2228272100 2129059008	ARM SERVO AM PUSH SWITCH	IP P.C.B LIFTER UP/Down

#### **KU-390 SWITCH UNIT**

Ref. No.	Part No.	Part Name	Remarks
	2129059008 3930047033		GREEN WHITE

#### **PS-152 FUSE UNIT**

	Ref. No.	Part No.	Part Name	Remarks
		2228374105 FEP1287		
Δ		2061015029	FUSE HOLDER .	1A 250V

## PS-155 FUSE UNIT (Canadian model only)

	Ref. No.	Part No.	Part Name	Remarks
		2228374105	FUSE P.C.B.	
$\triangle$		EP-72663	FUSE	1A 250V

#### **PS-149 POWER UNIT**

	Ref. No.	Part No.	Part Name	Remarks
	RESISTOR	GROUP		
ĺ	R4	2410163001	RD14B2H121J	120ΩJ ½W
	CAPACITO	R GROUP		
Δ	C2, 3	2518001023	CP05C= =AC473MC	-0.047μF 450VAC
	OTHER PA	RTS GROUP		
$\triangle$		2228356000	POWER SUPPLY P.O	) B
$\triangle$		2398001007	LINE FILTER COIL	
	100	2061036008	FUSE TO THE	630mA/250V
$\Delta$	Section 1	FEP1287	FUSE HOLDER	


## PS-153 POWER UNIT (Canadian model only)

Ref. No.	Part No.	Part Name	Remarks
RESISTOR,	GROUP		Carbon film
R4	2410163001	RD14B2H121J	120ΩJ ½W
CAPACITOR	GROUP		
C2,3	2568019010	CF93B2BAC473M	- 0.047μF 125VAC
OTHER			
	2228356000	POWER SUPPLY P.	С.В.
	A CONTRACT OF THE PARTY OF THE	LINE FILTER COIL	Maria Production of the William St. (September 1987)
	EP-72661	FUSE	630mA/250V

TA-7122 BP TR 2SA879(R)© 2SA999(F) 2SB561(C) 2SB562(C) 2SD467(C) SC3120A Vss Po Pi P2 P3 P4 P5 P6 P7 P8 P9 ST-2 2SC485(D) 2SC1213(C) 1 2 3 4 5 6 7 8 9 10 11 12 13 14 PDin-1 PDin-2 VDD Qin QoutFGinFVs FVc FVout PDs FGout PDb PDc **PDout** HA17902 2SA768 GND 2SC2023 Z 10 9 8 Vcc IN60 (Red) HD7426P LN8IRP (HL) 1S2076 (Light Blue) Cathode Anode [ HZ-9A-2 LN222RP LN322GP HA17901P 14 13 12 11 10 9 8 VO6A (Violet) VO6B (Blue) Cathode Anode FS-7805M **RBI54 SELIOIW** I = INPUT 2 = OUTPUT 3 = COMMON Cathode (Large stopper) 132

- 7 -

### EXPLODED VIEW OF TONEARM

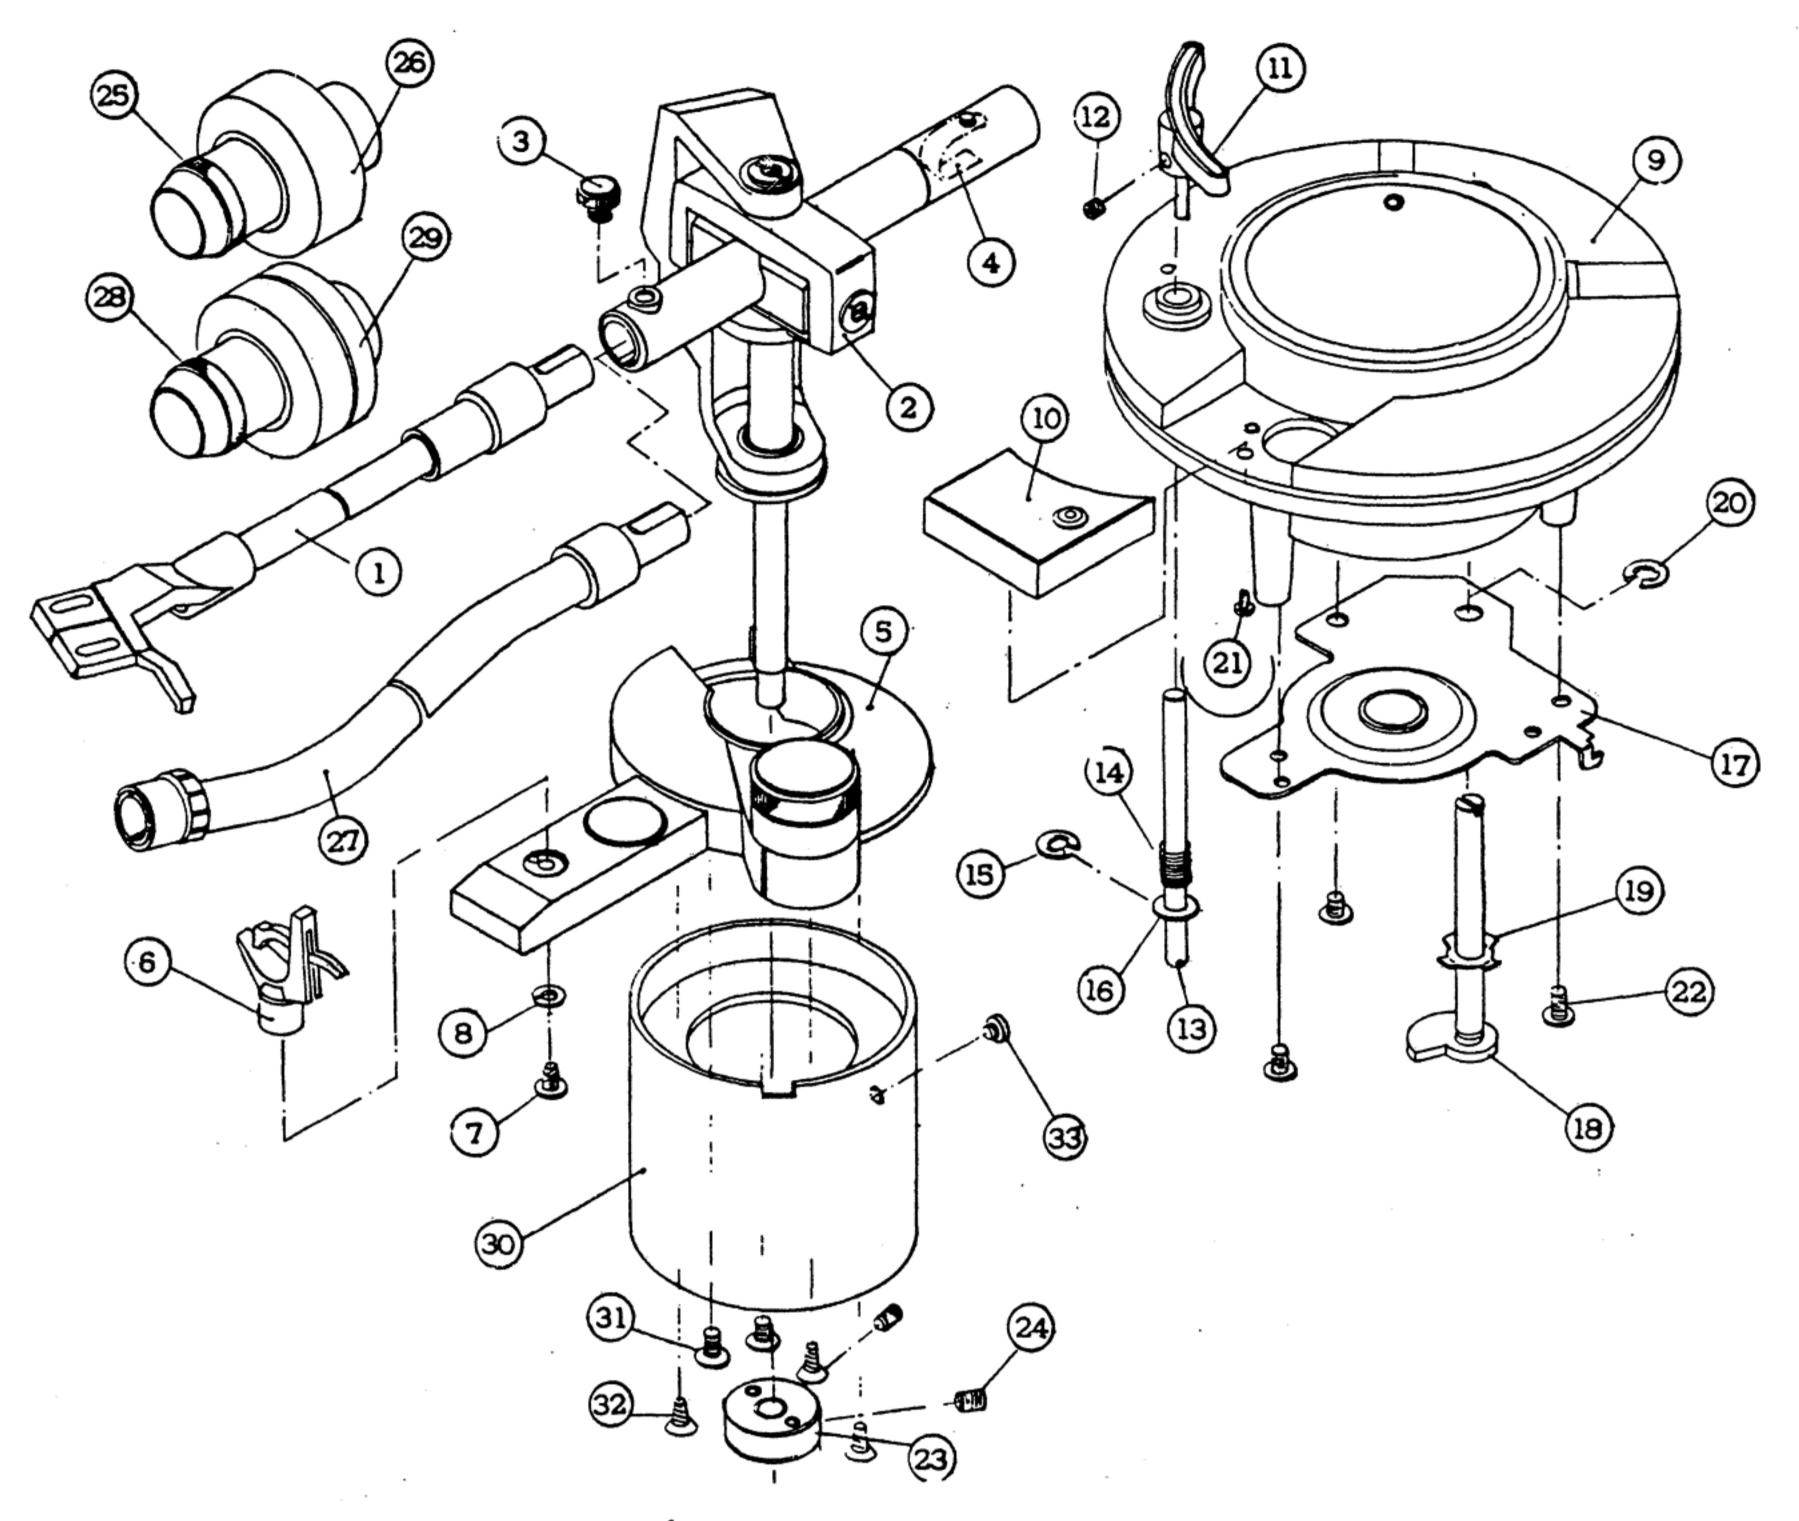


	r	•			
Ref. No.	Part No.	Part Name	Ref No.	Part No.	Part Name
, 1	3158389007	PIPE ARM ASS.	18	4248011103	ADJUST CAM ASS'Y
2	3158429006	MAIN BODY ASS.	19	3158451003	FRICTION WASHER
3	3158395004	FINGER SCREW	20	4761004008	4E RING
4	3158526006	GUIDE PIN ASS.	21	4740153016	2x6 CPTS
5	3158422100	HOUSING ASS.	22	4713303016	3x6 CBS
6	3158410109	ARM REST ASS.	23	3.158162101	SHAFT RING
7	4730304030	3x8 TAP SCREW	24	4744203017	3×6 BSS(A)
8	4752003005	3SW	25	3158402104	WEIGHT SLEEVE ASS.
9	3158532003	ARM BASE SUB ASS.	26	3158530005	WEIGHT RING ASS.
10	3158427105	L.E.D. COVER	27	3158414105	PIPE ARM ASS.
11	3158063132	LIFTER ARM ASS.	28	3158417102	WEIGHT SLEEVE ASS.
12	4744003013	3x3 SS(A)	29	3158531004	WEIGHT RING ASS.
13	3158428007	LIFTER SHAFT	30	3158424108	SHAFT CASE
14	4638065109	LIFTER SPRING	31	4712303017	3x6 CFS
15	4761003009	3E RING	32	4712304016	3x8 CFS
16	4751005004	4W	33	4770132000	2.6×2 SPECIAL SCREW
17	4128215100	SENSER BASE ASS'Y			•

For a smooth function of the automatic arm lift of this model, a special grease (SILICONE GREASE G-31) is applied at the lifter shaft/cylinder bearing.


In case of servicing this part, re-apply the SILICONE GREASE G-31 after cleaning the lifter shaft and inside of the cylinder.


After assembly, move the lifter shaft up and down until the movement thereof becomes smooth. Then make sure the lifter shaft falls by its own weight.


### PACKING INSTRUCTION

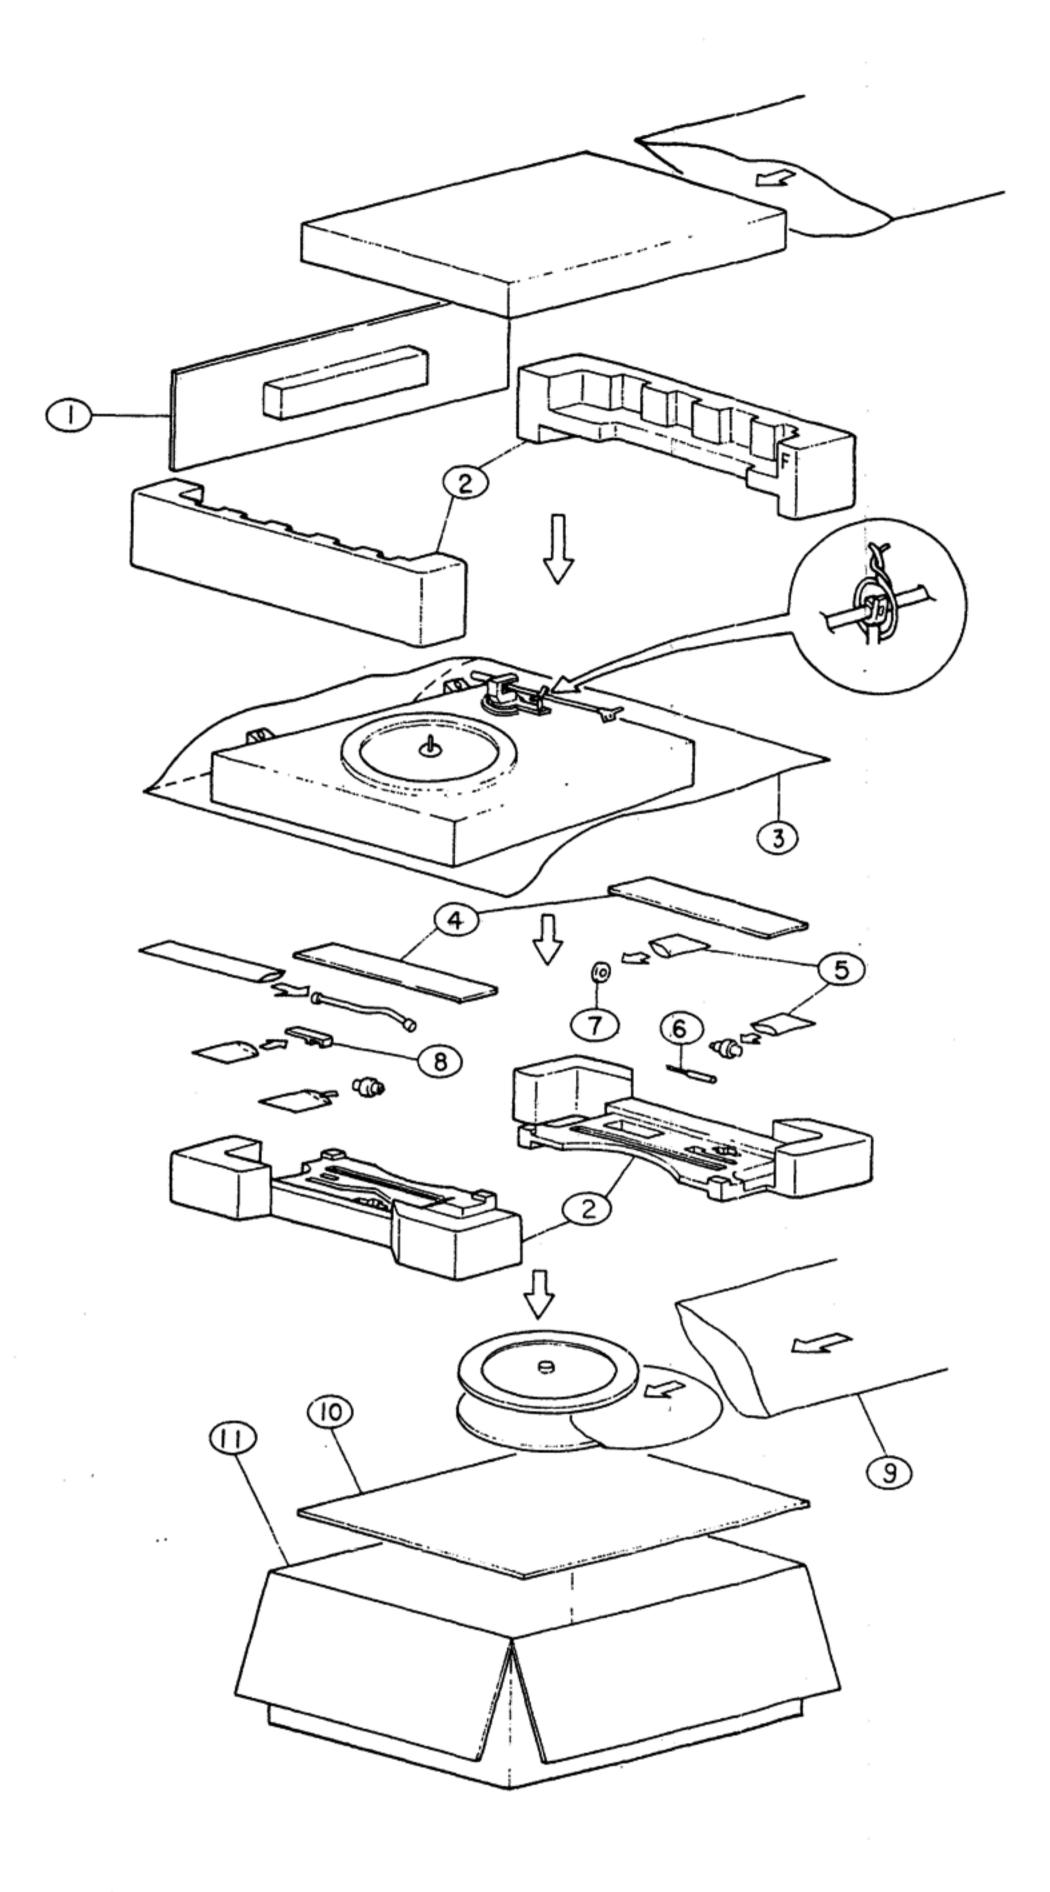

Ref. No.	Part No.	Part Name	
1	5028012105	REAR PACKING ASS'Y	
2	5058093103	PACKING ASS'Y	
3	5058092007	LAMINATE ENVELOPE	
4	5028010103	ACCESSORIES COVER	
5	5058006006	ENVELOPE	
6	5298006002	45 ADAPTOR	
7	5298004004	MINIDRIVER	
8	5298017208 ADJ. GAUGE		
9	5058023018	ENVELOPE	
10	5028011106	BOTTOM PLATE	
11	5018159100	CARTON CASE	
		P	



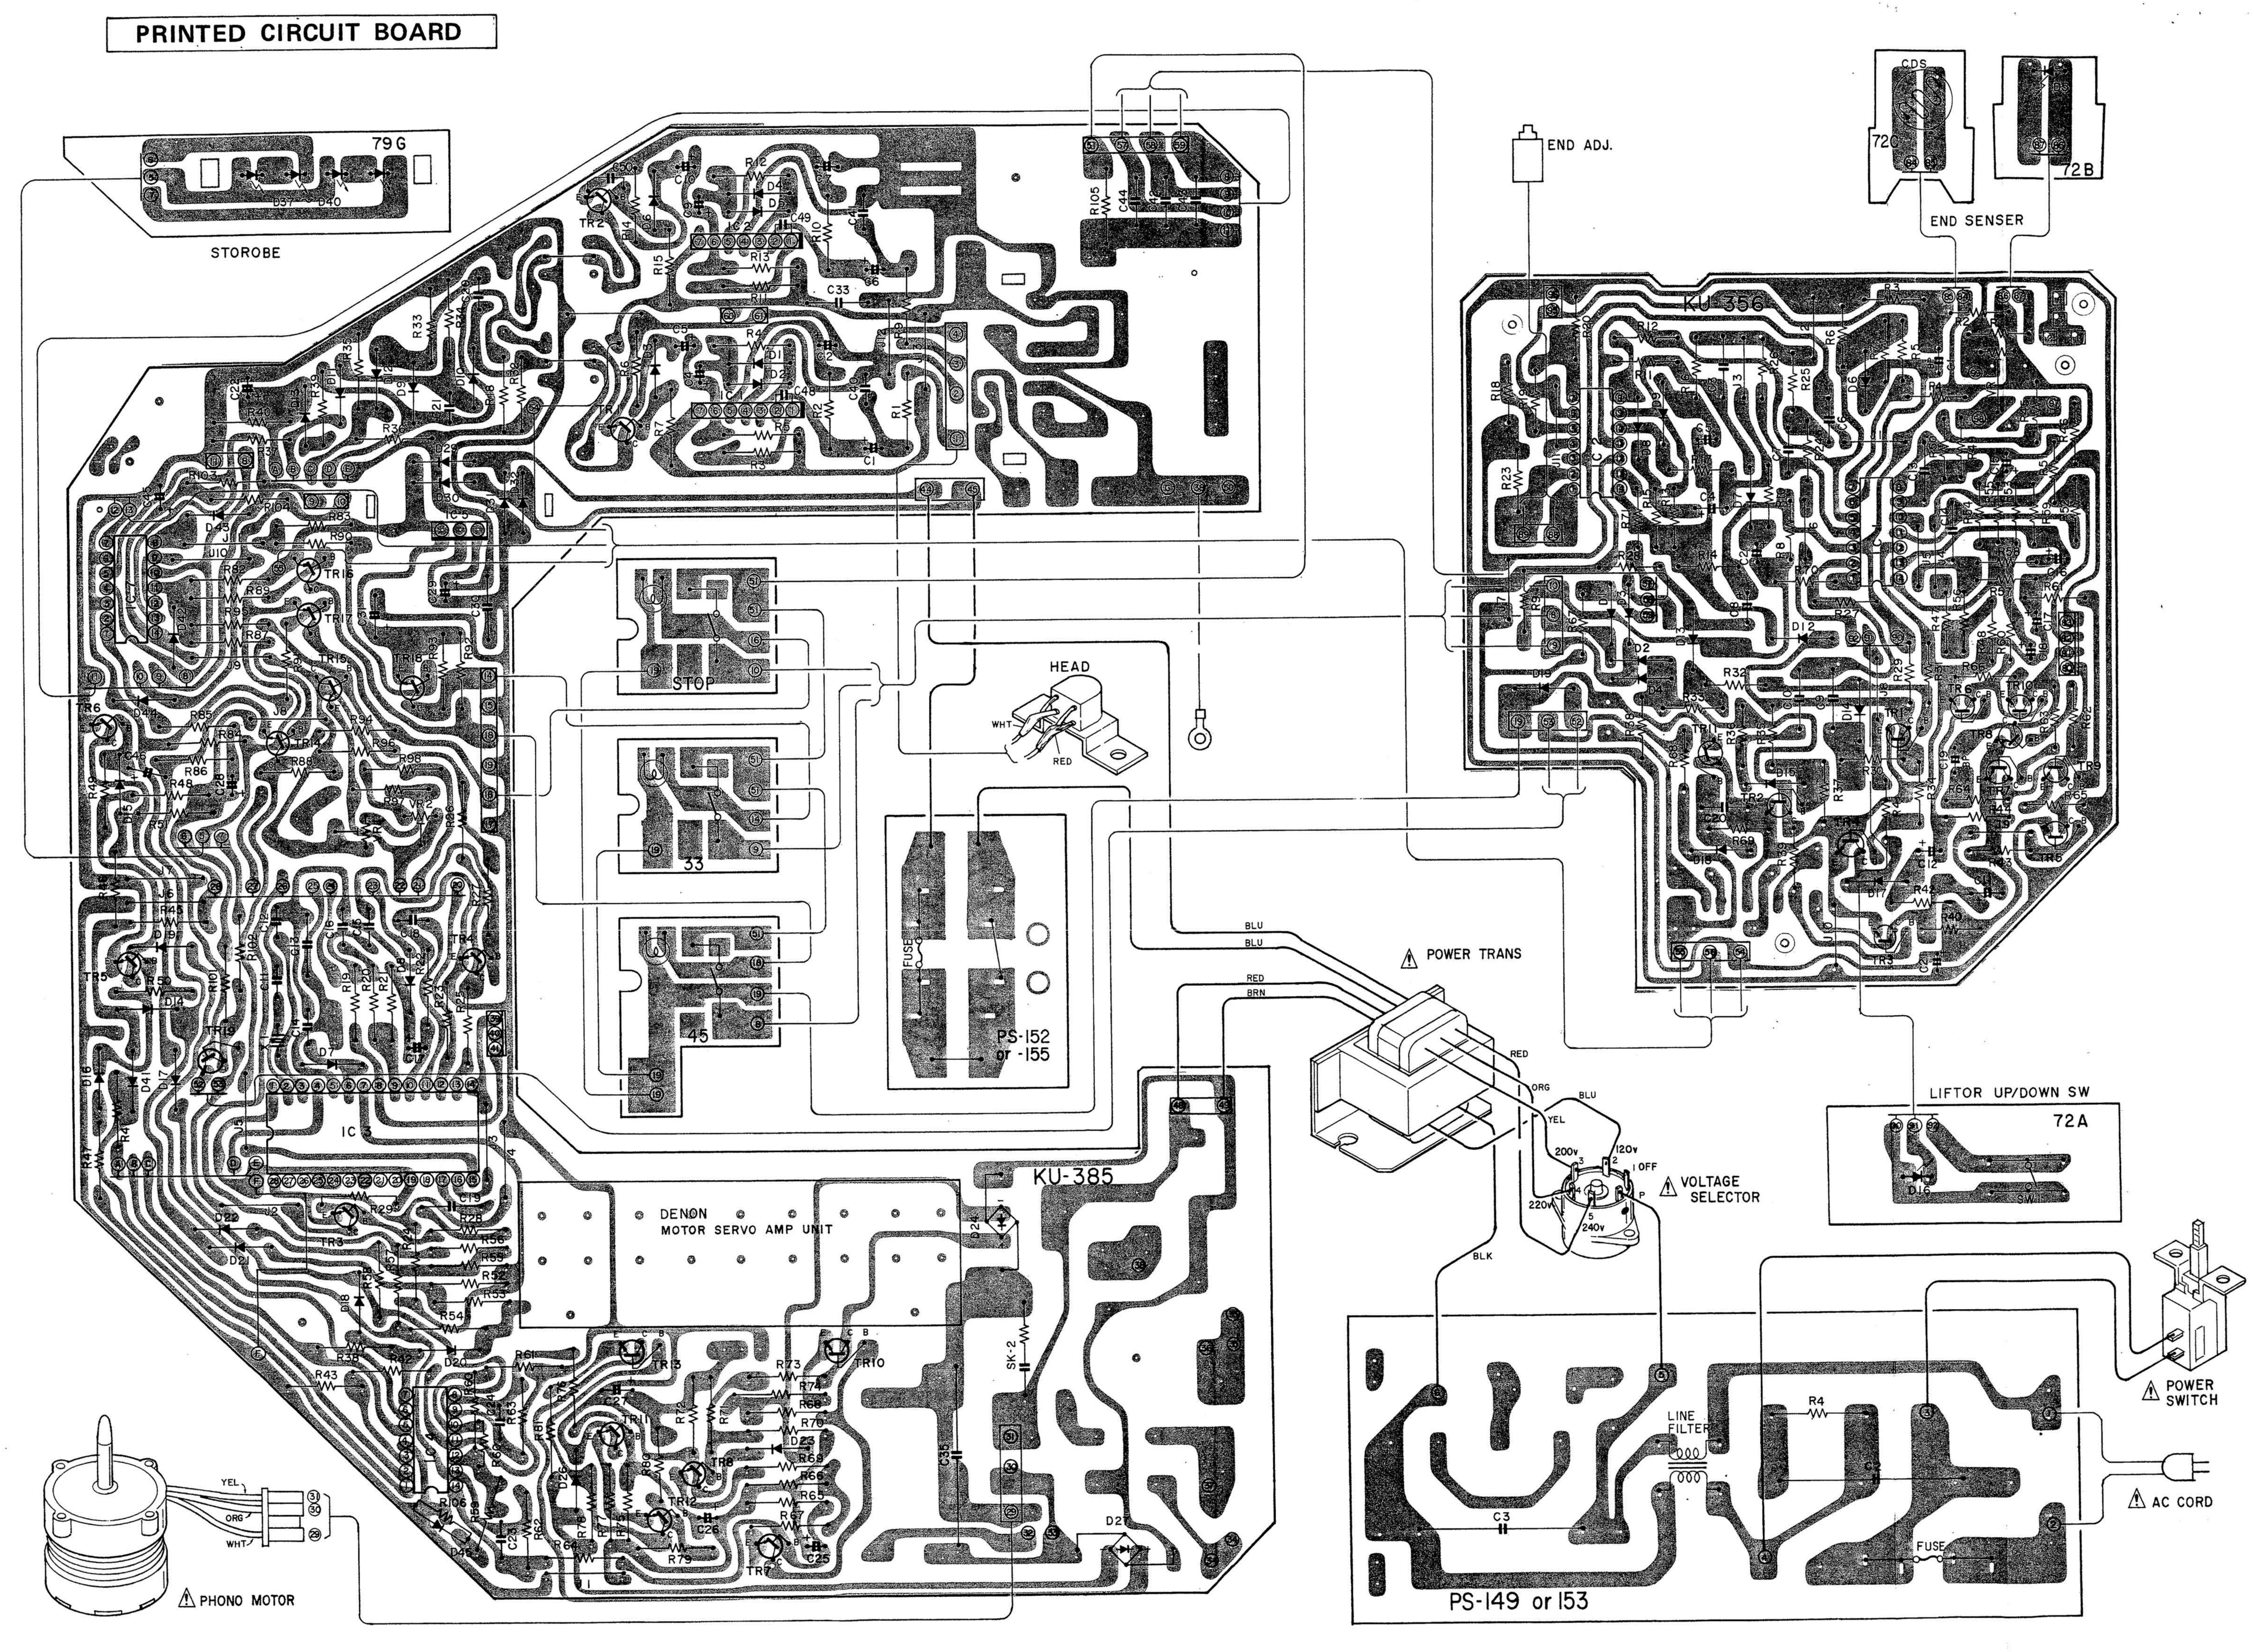

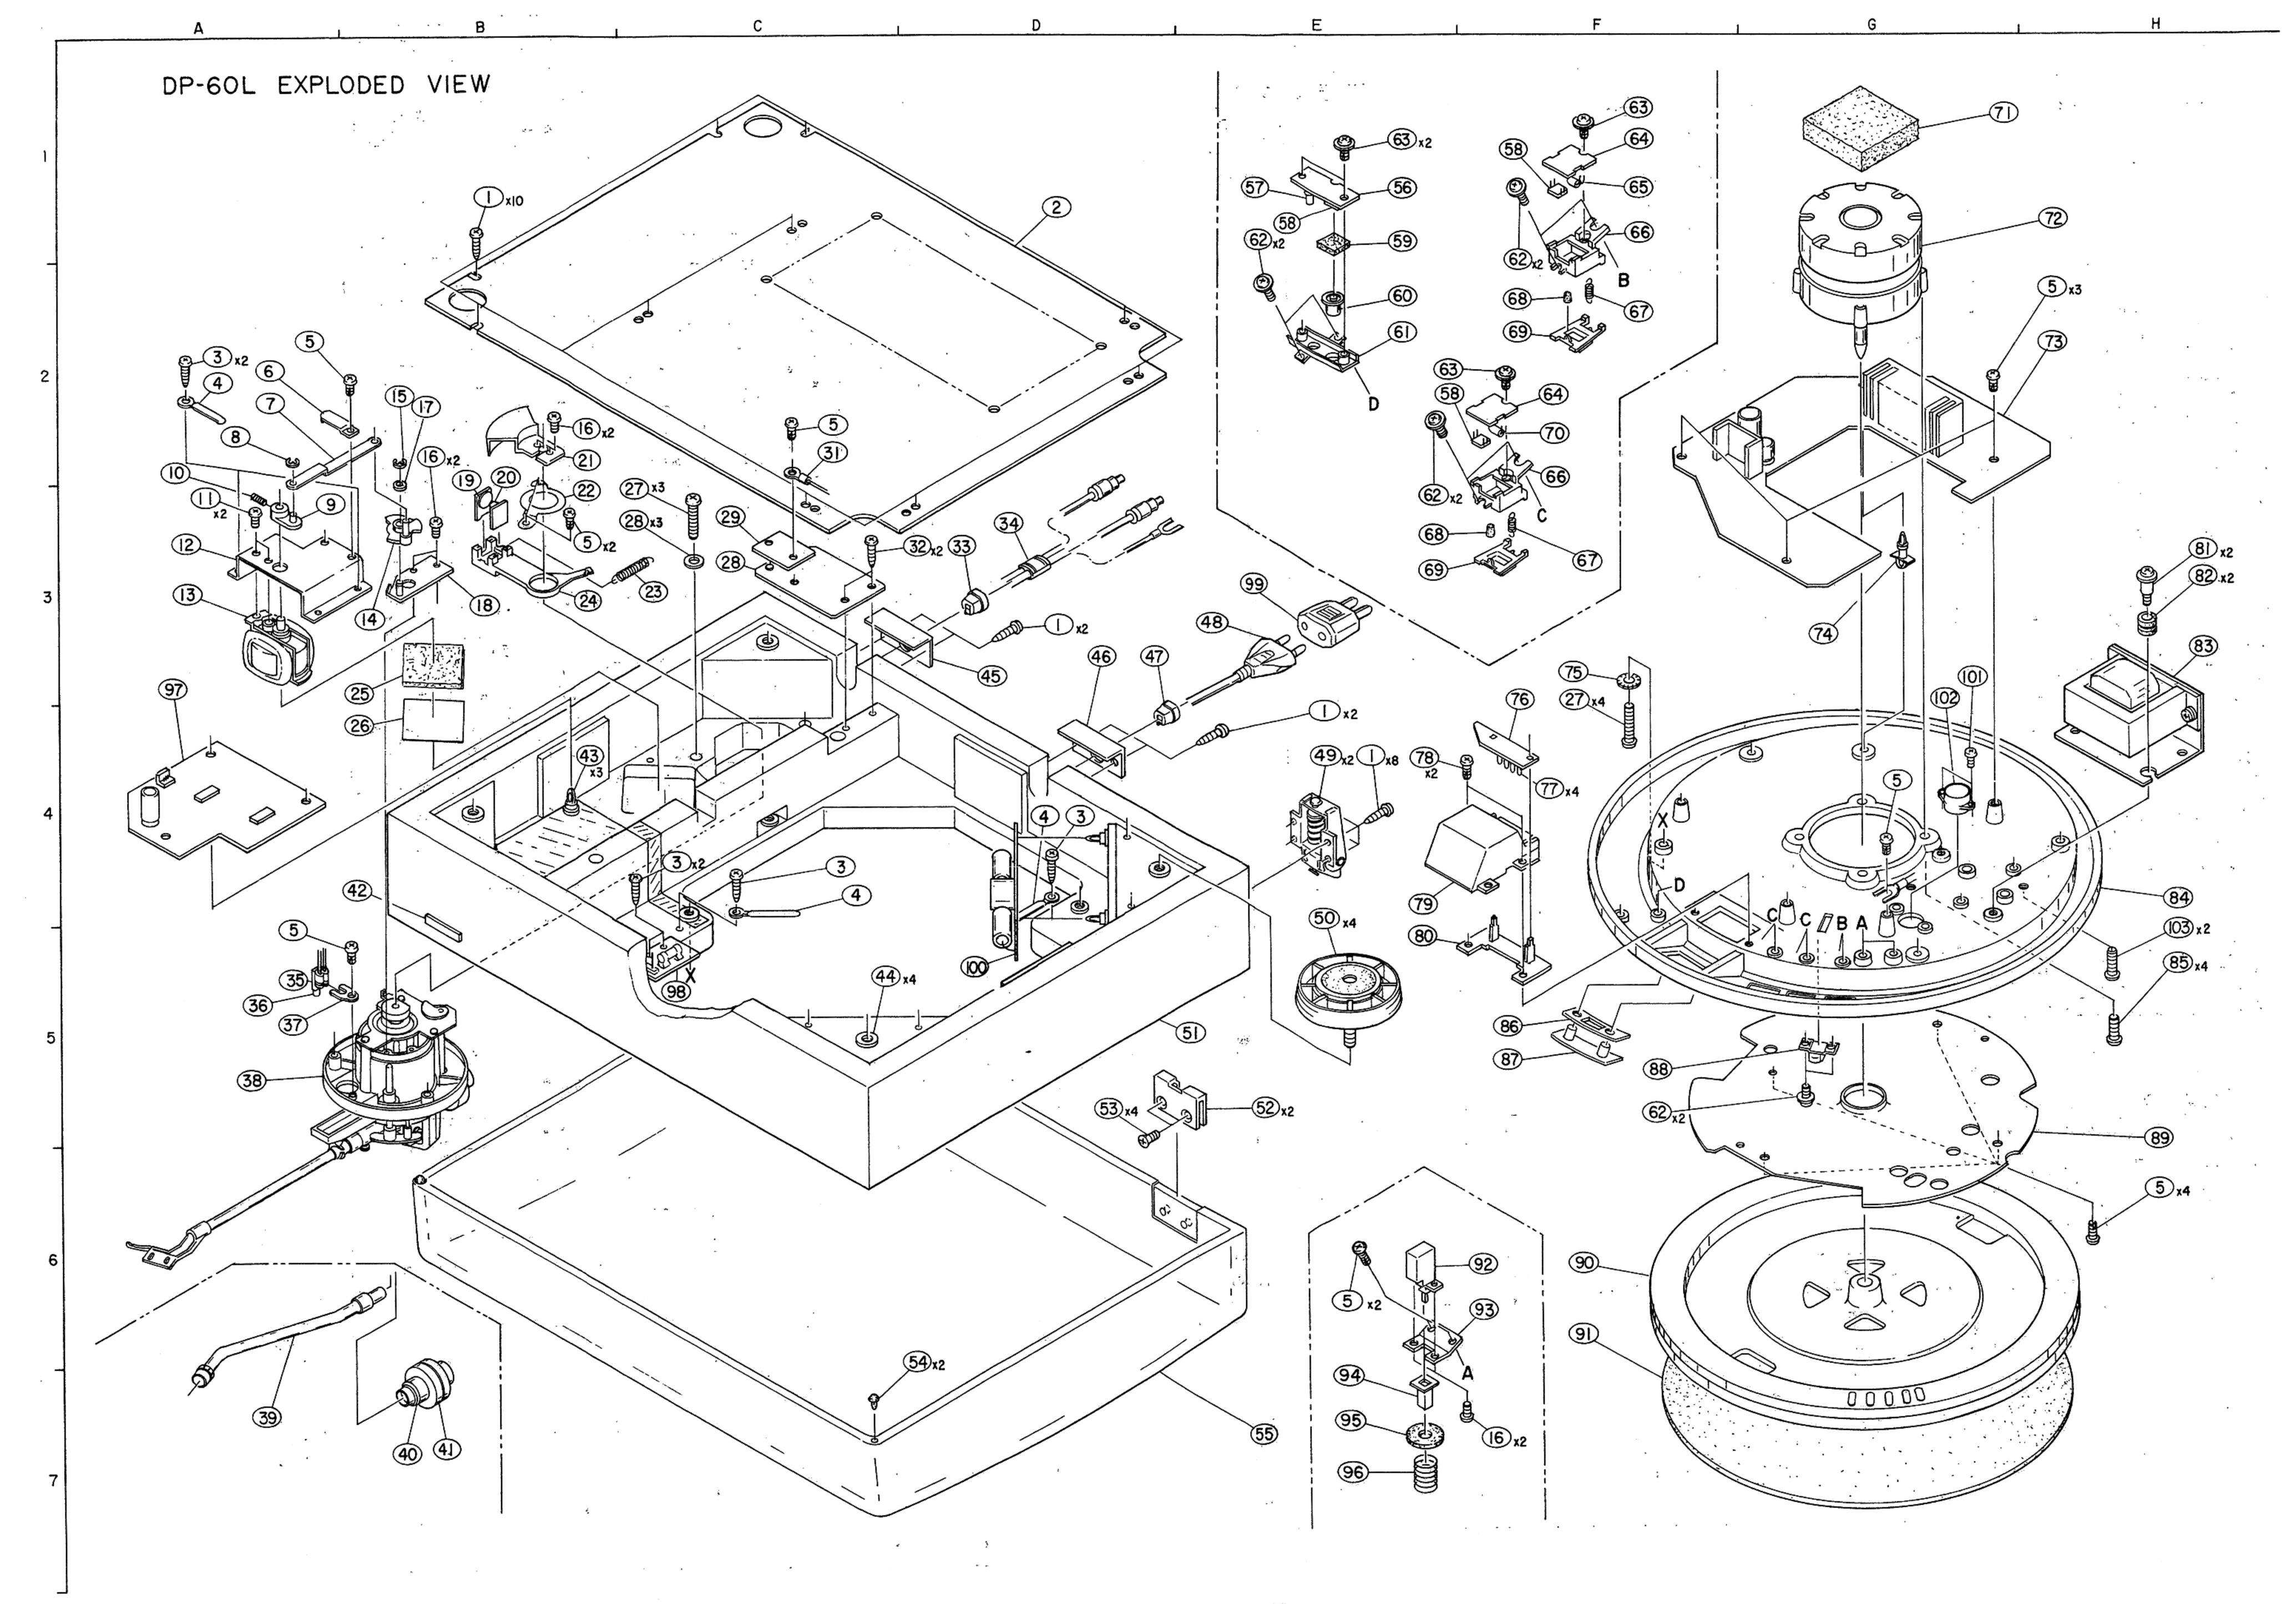

## PARTS LIST OF EXPLODED VIEW

Ref. No.	Part No.	Part Name	Remarks
1	4733309032	3×16 CBTS (1)	
2	1058053118	BOTTOM PLATE	
3	4730406019	3×12	
4	EP-4772	CORD HOLDER	·
5	4733800010	3×8 CBTS	: `
6	4128212103	GUIDE PLATE	
7	4358014100	CONNECTION PLATE	
· * 8	4761001002	2 E-RING	,
9	4218121104	MOTOR ARM	
10	4744200007	3×3 BSS	
11	4730812001	3×8 CBTS	
12	4128211104	MOTOR BRACKET	. ,
13	2178035109	MOTOR (C)	
14	4248010007	COM (A)	
15	4761003009	3E-RING	
16	4713303016	3×6 CBS	
17	4770090058	WASHER	
18	4128209200	CAM BASE ASS'Y	
19	3939019101	CDS	
20	3939023003	LED (SEL 101W)	
20	4118141103	SHUTTER	
	4418213003	PUSH PLATE	
22	4638212004	SPRING	
23			
24	4218115408	SENSER HOLDER	
25	4618087107	SPACER	
26	4418323100	M. SHIELD PLATE	
27	4713411018	4×25 CBS	
28	4751005005	4W	
29	KU-356	PHONE WIRE P.C. BOARD	A Part of KU-356
30	4128213005	SHIELD BRACKET	·
31	2098048030	TERMINAL WIRE	
32	4730309019	3×16 CBRTS (1)	
33	4458024003	CORD BUSH	-
34	2039616007	OUTPUT CORD	
35	2078007020	LED SOCKET WITH WIF	ŘΕ ·
36	3939078003	LED (LN222RP)	
37	4128214208	LED SUPPORTER	
38	FPU-990	TONE ARM UNIT	
39	3158414105		
	3158417102	WEIGHT SLEEVE	
40	3150417102	ASS.	
41	3158531004	WEIGHT RING ASS.	
42	FPR0464-1	DENON MARK	
43	4498041004	C.B. LOCKING SUPPORT	
44	FSC0102	SPECIAL NUT (A)	
45	4418584004	BUSHING PLATE (H)	
46	4418551008	BUSHING PLATE (F)	Canadian model
	4418552007	BUSHING PLATE (G)	Other models
47	MD-2982H	BUSHING	Australian model
,,	MD-3802	BUSHING	Canadian model
	4450020005	BUSHING	Other models
48	2006019307		Australian model
48	2062019008		Canadian model
**	2062019006	THE RESERVE OF THE PARTY OF THE	UK. model
	Company of the second second	AC POWER CORD	Other models
	2062002031	Proceedings of the control of the co	Ower models
49	4018027000	HINGE	
50	1048024403	INSULATOR	
51	1018228200	CABINET SUB ASS'Y	
_	FTS0701	HINGE PLATE	
52	1 10070.	1	
52 53	4712404055 4628006107	4x8 CFS BUSHING	

1		Ref. No.	Part No.	Part Name	Remarks
		nei. No.	rartino.	Part Name	hemarks
		55	1468120000	DUST COVER ASS'Y	
		56	KU-356	LIFTER SWITCH P.C. Board	A part of KU-356
		57	3939079002	LED (LN322GP)	.KU-350
		58	2129059008	PUSH SWITCH	
		59	4618086108	KNOB CUSHION	
		60	1138103302	LIFT SW. KNOB	
		61	4498040209	LIFT SW. HOLDER	,
		62	4700010011	3×8 CPS W	
		63	4700026005	3×8 CBRTS W	
		64	KU-390	SWITCH UNIT	
		65 66	3930047046 4498037102	PILOT LAMP (WHITE) SW. HOLDER	
		67	4638009000	2F. COIL SPRING	
		68	1298014108	BUTTON CUSHION	
		69	1138101100	PUSH BUTTON	
		70	3930047033	PILOT LAMP (GREEN)	
		71	4618067004	PAD	
	$\triangle$	72	2178018210	and the same of the contract o	
		73	KU-385	MOTOR SERVO	
		74	4498046009	AMP UNIT C.B.L. SUPPORT	
		75	4753202009	4-TW	
ľ		76	KU-385	STOREBE LED	A part of
				P.C. BOARD	KU-385.
		77	3939041001	LED	
		78	4733800023	3×10 CBRTS	•
		79	1468058208	MIRROR CASE ASS.	
		80	4498038004	LED. HOLDER	
		81 82	4770192008 4620027003	SPECIAL SCREW RUBBER BUSH	
	<u>^</u>	83	2339037205	POWER TRANS	
		84	4468076106	MOTOR BOARD ASS'Y	
		85	4713406010	4×12 CBS	
		86	4148022001	BLIND	
		87	1468051001	STROBO WINDOW	
		88	3918425004	MAGNETIC HEAD ASS.	
		.89	4148126004	SHIELD PLATE	Multi-voltage model
		,,	4148102109	SHIELD PLATE	Other models
		90	4218074206	RECORDED	,
				TURNTABLE	
	A	91	4218094040	RUBBER SHEET	
		92	2129136028 2129136015	POWER SWITCH	Canadian model Other models
		<b>9</b> 3	4418532108	PUSH SW. BRACKET	Other moders
		94	1138100101	PUSH KNOB	
		95	4618094006	CUSHION	
		96	4638606005	SPRING	•
		97	KU-356	ARM SERVO	:
2000	•			AMP UNIT	
	<u> </u>	98	PS-155	FUSE UNIT	Canadian model
		00	PS-152	FUSE UNIT	Other models
Tacond in		99	2033902005	PLUG ADAPTOR	Multi-voltage model only
	⚠	100	PS-153	POWER SUPPLY UNIT	Canadian model
The state of		,	PS-149	POWER SUPPLY UNIT	Other models
		101	4713203019	2.6x6 CBS	
1	△	102	2123315010	VOLTAGE SELECTOR	alco ario com no
		103	4770031020	4x20 CBS (R)	
1					

**⚠** WARNING:

Shaded parts are important to SAFETY. Replace always with same type, same

rating.

# DENON

#### MAIN SPECIFICATIONS

Phono motor

Wow and flutter:

Drive system:

Direct drive AC motor

Speeds:

33-1/3 rpm, 45 rpm. 0.015% wrms (see note)

S/N:

More than 78dB (DIN-B)

Rise time:

Less than 2.0 sec. (33-1/3 rpm)

Platter:

Diecast aluminum 300 mm diam Mo-

ment of inertia, 200 kg-cm<sup>2</sup> (0.2Nm<sup>2</sup>)
Including turntable mat

Motor:

AC servo motor

Speed control system:

Speed servo control by frequency detection system combined with phase control system with reference to quartz

crystal oscillator.

Load influence:

0% at out-most groove with stylus

force of 100 g (0.98 N)

Speed deviation:

Less than 0.002%

Brake system:

Electronic brake

NOTE:

Measured by DENON's method using magnetic pulse wheel.

General

Power supply:

Rated voltage and frequency are shown on the rating label at the back of cabinet and/or on the label attached to the

power supply cord.

Power consumption:

Approx. 18 W

Dimensions:

485Wx180Hx410D mm

(Dust cover closed)

Weight:

Approx. 13 kg

\* All specifications and outward appearance are subject to alteration for improvement without notice.

Change the rated frequency

The DP-60L can be used compatibly on power supply frequencies of 50Hz and 60Hz.

Tonearm

Type:

Static balance type with vibration

damping (Replaceable tonearm tube)

Effective length:

244 mm

Overhang:

14 mm

Tracking error: Less than 2.5° Tracking force range:

0~2.5g/rot.(1 division is 0.1g)

0~25mN/rot. (1 division is 1mN)

Acceptable weight of cartridge:

Approx. 4g to 10g (Including screws and nuts when mounted on straight

arm tube)

Approx. 12g to 18g (Including head shell, screws and nuts when mounted

on S-shaped tonearm tube)

Head shell connector:

Standard type 4P (On S-shaped tonearm

tube)

Arm height adj. range:

Approx.5mm

Output cord:

Low capacitance cord

Facilities provided: Anti-skating device and Automatic arm

lift mechanism

Tonearm lifter:

Servo-controlled by angular control

motor

NIPPON COLUMBIA CO., LTD.

No. 14-14, AKASAKA 4-CHOME MANATO-KU, TOKYO, JAPAN TEL: 03-584-8111

TELEX:

JAPANOLA J22591

CABLE:

NIPPON COLUMBIA TOKYO