

#### Deze download wordt u gratis aangeboden door Pick-upnaalden.nl

Web: www.pickupnaalden.com

Email : info@pick-upnaalden.nl


Facebook : www.facebook.com/pickupnaalden


Twitter : twitter.com/Pickupnaalden

Google+ : https://plus.google.com/+FCaris\_pickupnaalden

## 1. BLOCK DIAGRAM

### 1) SR-737/SR-7090

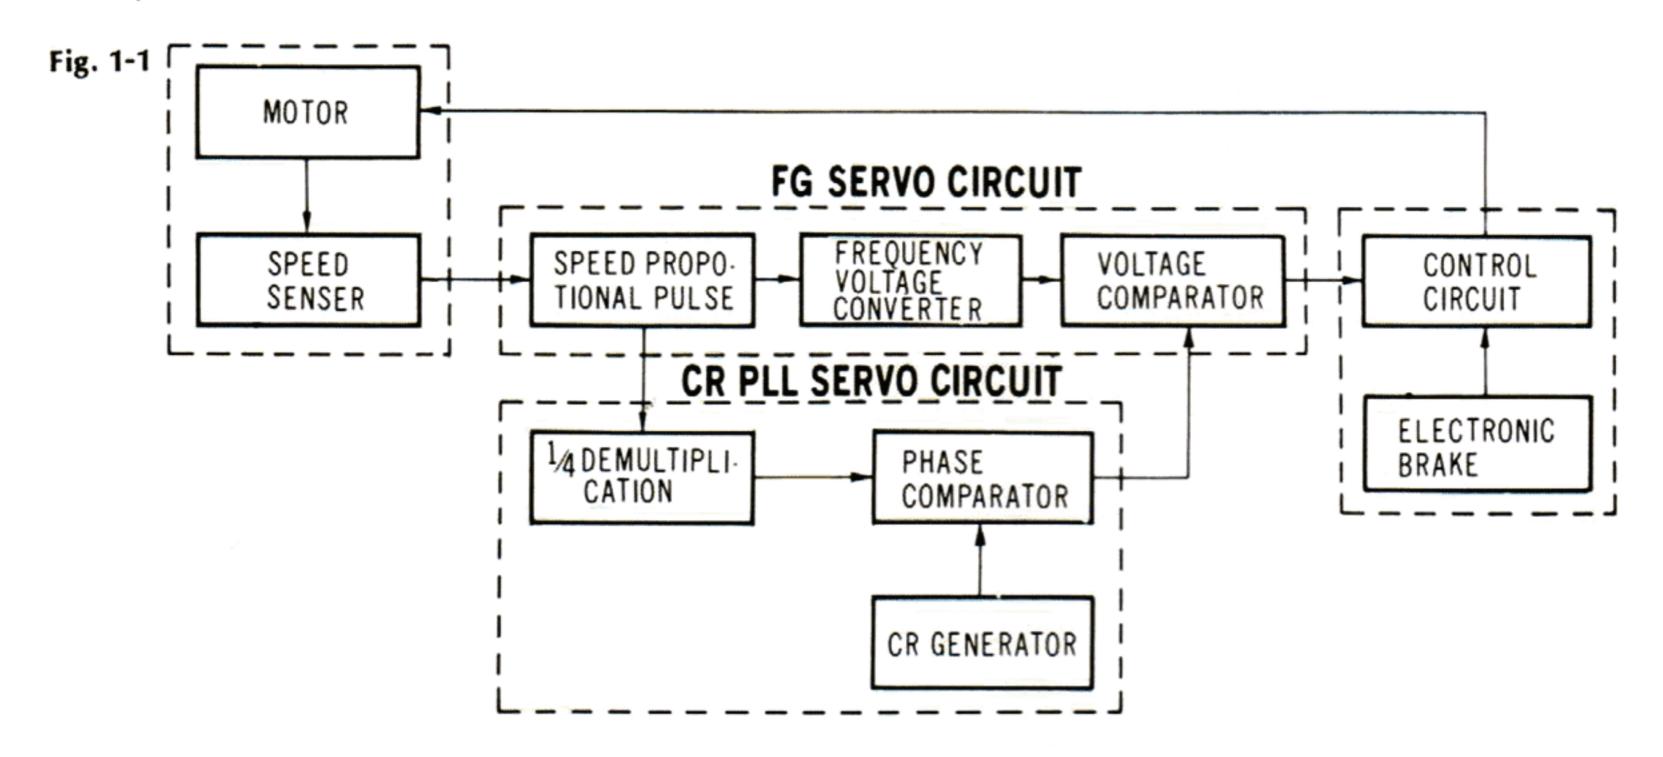

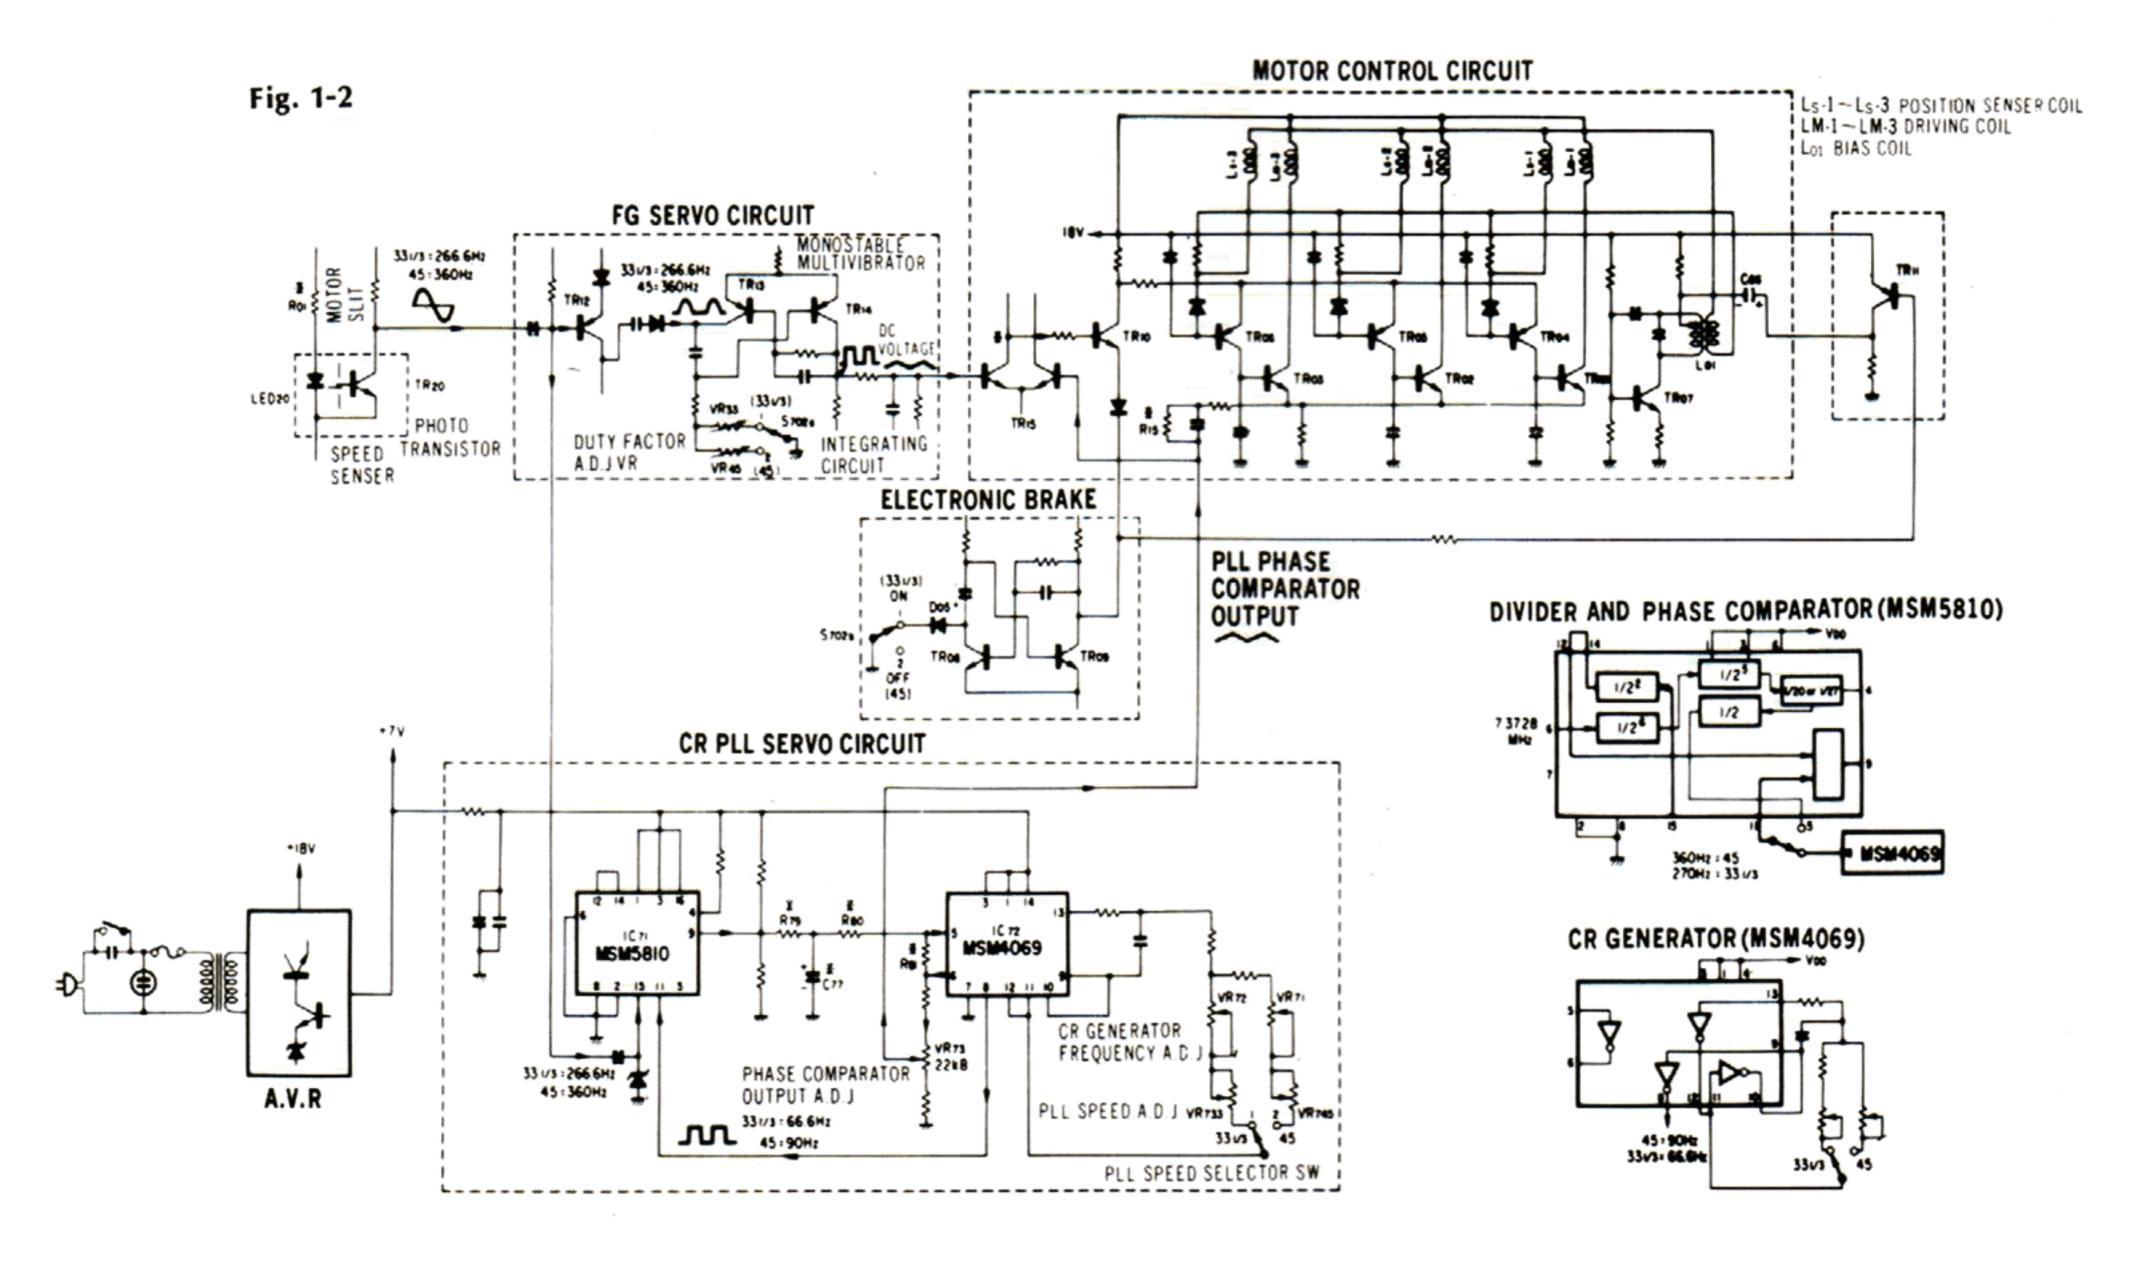


### SR-737, SR-7090 Main Circuit

The electronic circuitry in this set is two servo circuits and a motor control circuit.

The servo circuit employs the PLL servo system and the speed control system (frequency-generator servo) together.

This set employs both the F-G servo system and PLL servo system by which rotation fluctuation is always locked in the reference signal.

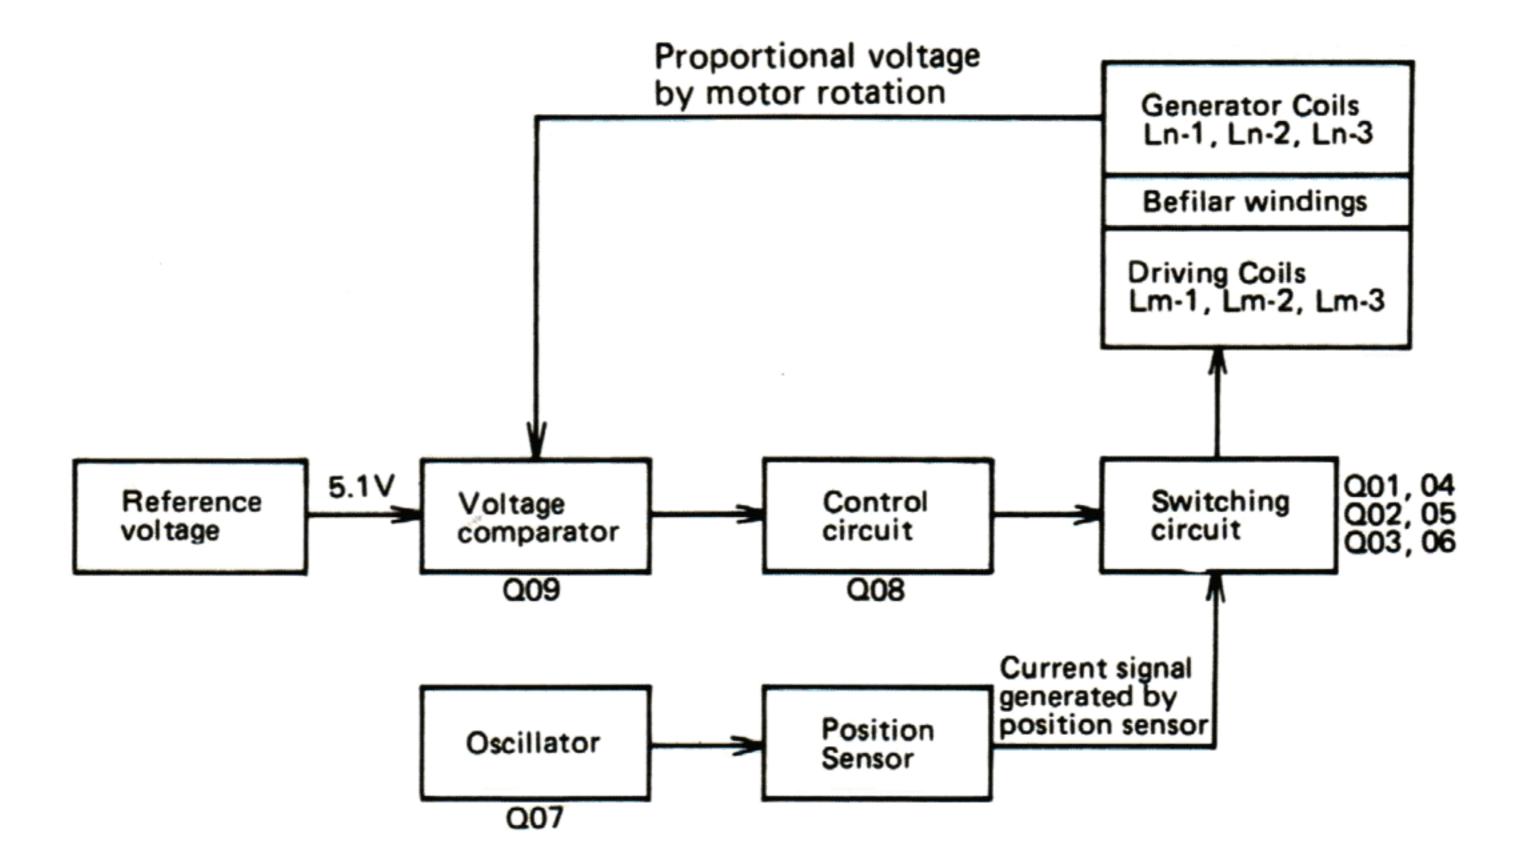

## 2. OPERATIONS OF ELECTRIC CIRCUIT


### A.SR-535/SR-5090

D.D. Motor of this direct-drive player system is DC blushless servo motor having 20-pole on interior surface of the rotor magnet and 30 slots for winding stator coils, which ensure the performance for extremely less wow-flutter and over-load fluctuation. Namely, driving operations of this D.D. Motor connected with V.G (Voltage Generator) servo circuit board are as follows.

Generator coils, Ln-1, Ln-2 and Ln-3 oscillate voltage proportional by rotation speed of the motor. Voltage comparator compares the voltage induced by rotation speed with reference voltage, 5.1 volts, from printed circuit board, S-0015. Control circuit, Q08, restricts current of driving coils by control signal occurred in the voltage comparator, Q09.

When this current flows by turn into one of three driving coils, Lm-1, Lm-2 and Lm-3, the motor rotation speed varies to the current proportionally. And, the induced voltage of three generator coils change proportionally by changing motor rotation speed. In other words, voltage comparator compares the voltage proportional by rotation speed induced in generator coils with reference voltage, 5.1 V, as a result, control voltage appears at one of collectors of Q09. This control voltage is provided for the purpose of obtaining an accurate rotation speed of the motor free from load-fluctuation of motor revolution.

As mentioned above, the motor is blushless outer rotor motor and this outer rotor on interior surface is magnetized in order of N-S-N-S poles regularly. The induced current by the rotor-turn flows into one of driving coils. Namely, very weak high-frequency signal, 83 kHz generated by oscillator coil, L01, and capacitor, C07, adds to three position sensors. This sensor detects the turning angle of rotor, and it generates current signal corresponding to rotation angle which operates for switching circuits, Q01, Q02, Q03, Q04, Q05 & Q06, then it flows into Lm-1, Lm-2 and Lm-3 by turn, resultly, the current drives turntable (platter) to obtain an accurate normal speed rotation.

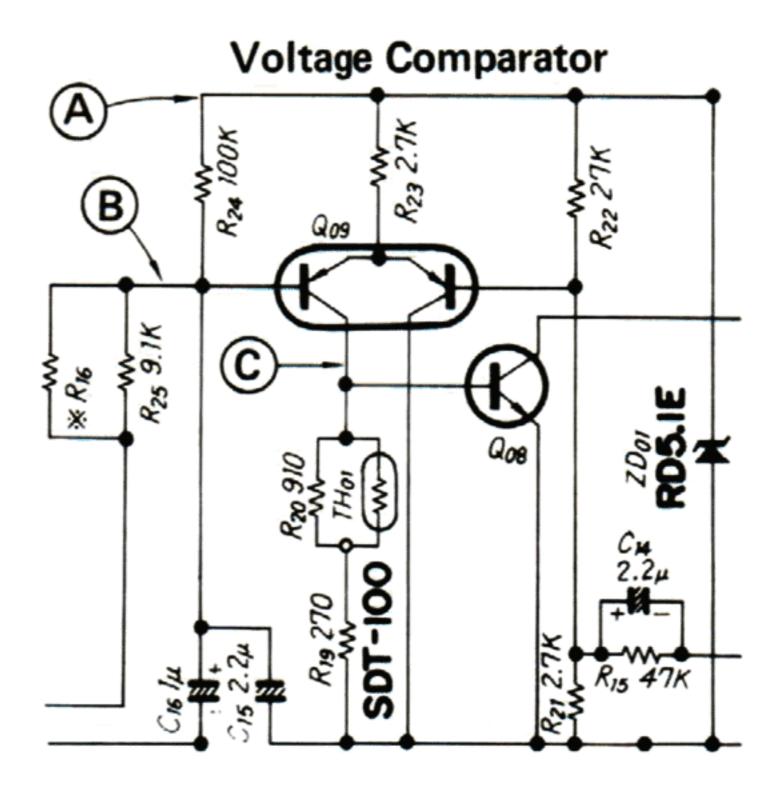

- A : Reference voltage 5.1V
- B : Proportional voltage from generator coils by rotatoin speed of motor
- C:Control voltage

## 1) The Function and Operation of MSM5810 (Fig. 2-1)

### CR. PLL

- 1. From CR generator in MSM4069, the reference signal enters into the pin No. 11 of MSM5810.
- 2. A signal from speed sensor is supplied to pin No. 15 and after divided into 1/2, the signal is supplied to phase comparator.
- 3. In quartz PLL, the revolution speed is locked by its generating frequency; however, in CR PLL, pitch is controllable by altering its generating frequency.

# 2) Frequency-voltage Converter Circuit (Fig. 2-2)

The frequency-voltage converter circuit is composed of a monostable multivibrator by TR13, TR14.

When trigger pulse detected by speed sensor is supplied to TR13, pulses which width are defined by time constant CR20, R22, R68, and VR33 (R22, VR45), appears at the collector of TR14 as the same number as input trigger pulses.

The volume of VR33 and VR45 are for duty factor adjustment to determine the "t", the pulse width.


With fluctuation of turntable revolution speed, the trigger pulse frequency occurred in a unit period varies.

As the width "t" of the pulse is defined by above mentioned C, R, it would not change but term "T" in which the trigger occurs, would change.

Therefore, at the output of the next stage, integrating circuit, the proportioned D.C output to the trigger pulse frequency is obtained.

### Duty Factor

When a pulse of width "t" is occurring in a certain term "T", t/T is so called DUTY FACTOR.

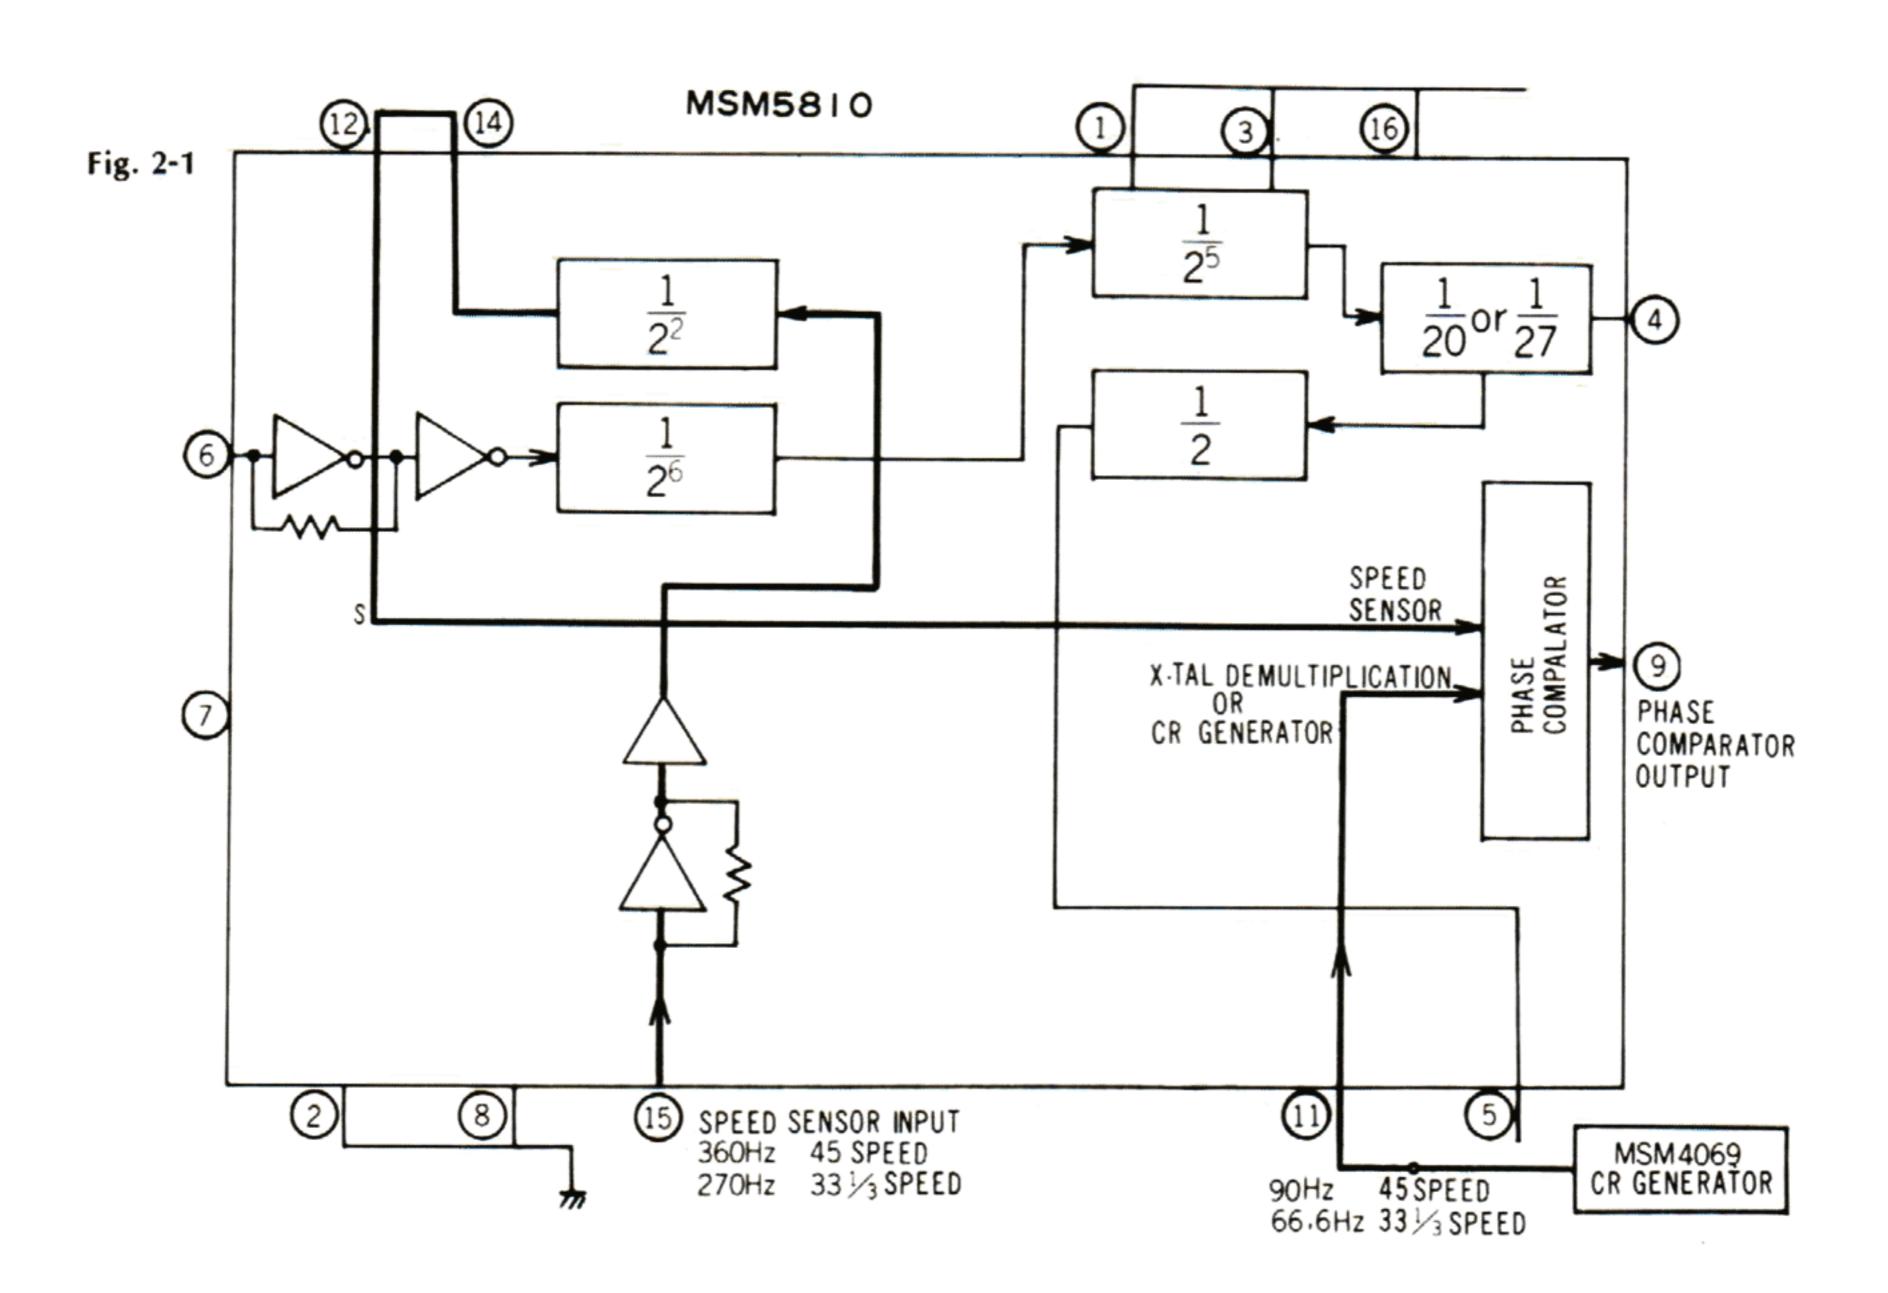

### 3) Electronic Brake (Fig. 2-3)

### Configuration

As turntables (platters) which are employed in direct drive system players, have great inertial moment, it requires certain time to settle the rotation when shifting the revolution speed from 45 rpm to 33-1/3 rpm.

To avoid above phonemenon, this model is developed to have Electronic Brake. The torque needed for the brake is obtained by reversing the revoluting direction of motor to eliminate the capacitor C06 electrically from high frequency oscillator in the motor control circuit and by switching off the speed control transistor (TR10) to omit the servo control that the reverse revolution torque is increased.

In fact, turntable platter would not begin reverse turn because of the inertial moment and time length of braking.

The circuit to eliminate the capacitor C06 electrically and to turn off the speed control transistor is monostable multivibrator and selector switch as shown in Fig. 2-3.

### Operation

A circuit including TR08 and TR09 is a monostable multivibrator and usually its operation is in stable state with TR09 being ON. When TR09 is ON, TR10 functions normally and TR11 is ON. C06 and R20 are parallelly connected and functioning to TR11. When revolution speed is shifted from 45 rpm to 33-1/3 rpm, namely \$702 is switched from 2 to 1, a minus trigger is supplied to monostable multivibrator.

At the same time, plus pulse defined by R13 and C11 is generated at the collector of TR09. By this pulse, the emitter voltage of TR10 is increased so that TR10 becomes not to function as speed control and the servo system does not function.

Since this pulse is supplied to the base of TR11 simultaneously, TR11 turns off and makes C06 not function completely.


When C06 is eliminated electrically, both reverse turn and torque increase by cutting off the servo system occur at once. Consequently, the brake functions only while the pulse is generated.


### Reverse Revolution

At normal revolution, the direction is defined by relation between position sensor coil and magnet, position sensor coil and driving coil, and others. One of 3 position sensor coils functions successively and individually which turns on the switching transistors connected to position sensor coil to function driving coils.

At reverse revolution, a signal wave having  $90^{\circ} \sim 180^{\circ}$  of phase difference against standard wave is mixed to preceeding standard wave by eliminating C06 electrically. Then the mixed wave is supplied to switching transistors.

Above function breaks the electrical balance of position sensor coils and its function becomes opposite; therefore, the position sensor coil which is normally ON turns OFF and other coils become ON. As a result, the opposite revolution torque for brake is obtained.

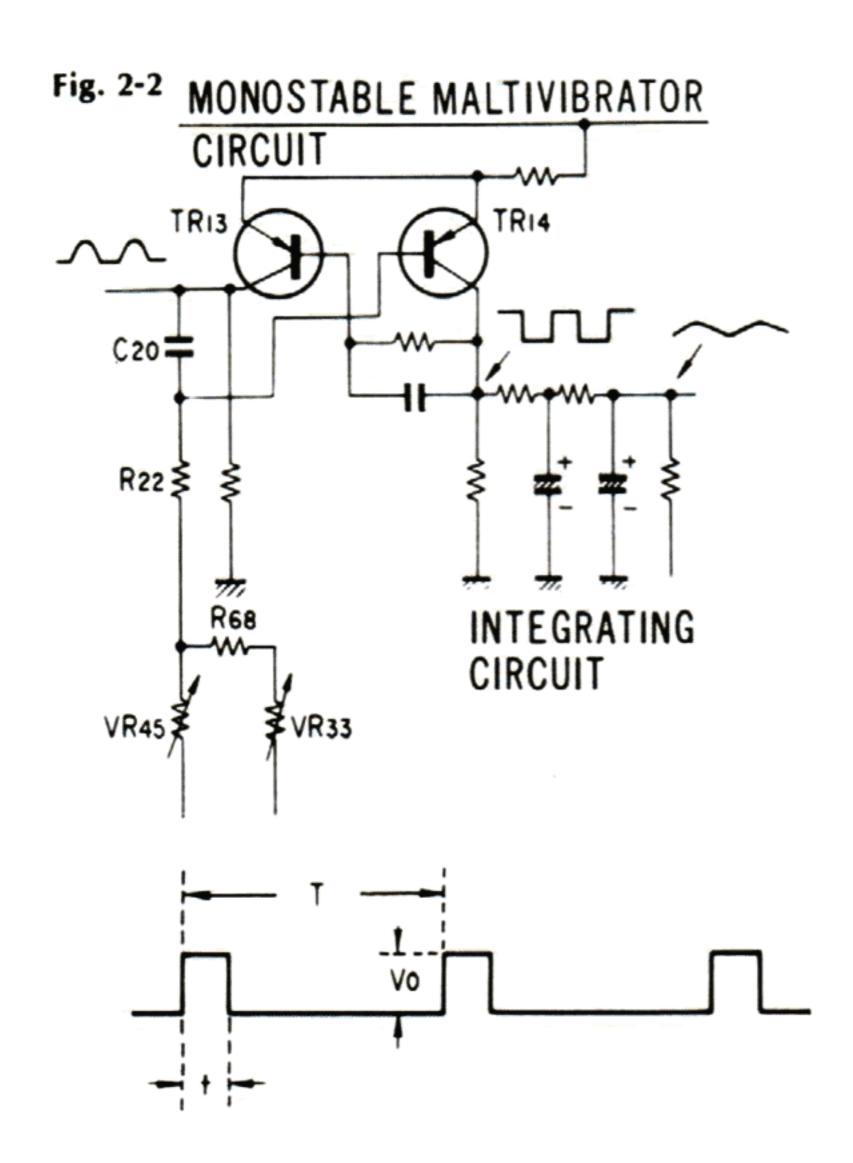

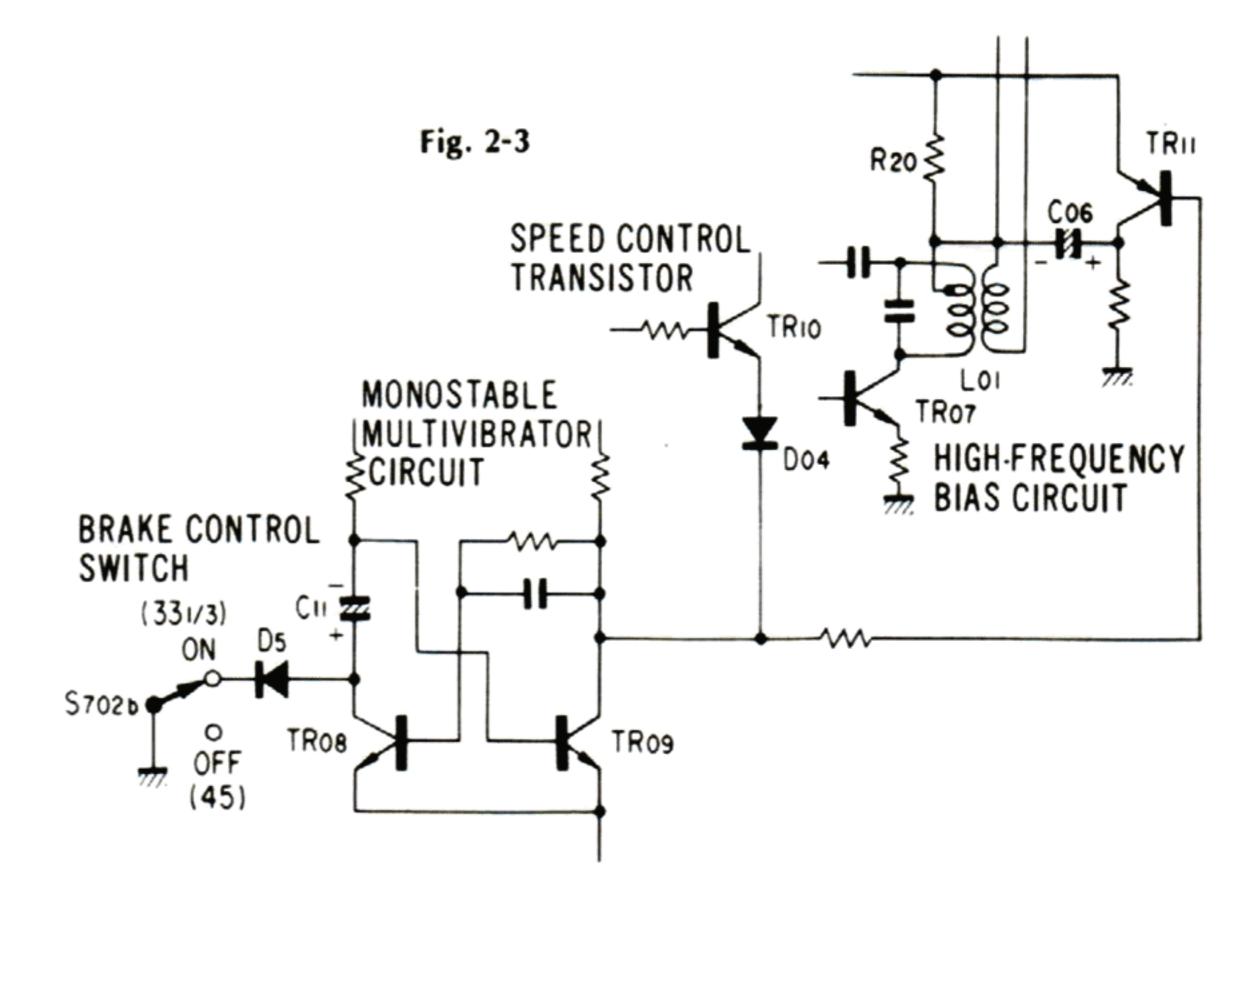

## 3. OPERATIONS OF AUTO MECHANISM

### 1) AUTO-RETURN MOVEMENT (Fig. 3-2)

After a record having been played and when the stylus proceeding to the lead-out groove, as to model SR-535/SR-5090 the L.O. adjusting plate under the tone arm pushes the sensor lever directly, and as to model SR-737/SR-7090, the L.O. adjusting plate under the tone arm passes through over the Cds sensor plate, and by this action, the sensor obtains a position detecting signal which makes sensor AMP and Plunger function, and then the sensor lever is pushed.

Movement of the crutch makes both the T.T. gear and the main gear engage each other and then the main gear rotates by one revolution.

The first half revolution of the main gear pushes the driving arm outward and also the swing disk rotates in its return direction. At this moment, two rubber rings mounted on the chucking arm end of the swing disk catch the T.A. driving board under the tone arm by the operation of a guide hole of the mechanical chassis.

As a result of this, the tone arm moves in the same direction as the swing disk and is replaced on the arm rest owing to this autoreturn movement.

Just before the reverse revolution of the swing disk, the release cam (triangle shape) makes release the catching action of the T.A. driving board operated by the two rubber rings mounted on the chucking arm end of the swing disk.

Therefore, at the time of the reverse revolution of the swing disk (in the lead-in direction) depending on the second half of the main gear revolution, the controlling of the tone arm is completely released. At the same time, just before completion of the swing disk movement, the claw lever moves outwards and the claw lever hooks the auto switch lever to move the switch-fixing board, so that the power supply switch is turned off.

### 2) AUTO-START MOVEMENT (Fig. 3-3)

When the cuing knob is turned to the Auto-Start position, the manual check lever is pulled and also the manual cam is moved through the link rod (2), and then the start lever and the sensor lever are both pushed.

Hence, the crutch moves and engages with the T.T. gear of the rotating center shaft. Further, the pushing-out of the start lever moves the auto switch lever and makes the switch-fixing board keep apart from the driving arm to turn on the power switch, as a result, turntable (platter) begins rotating.

The first half revolution of the main gear pushes the driving arm and then the swing disk rotates in such a direction that the tone arm can return. The second half revolution of the main gear pulls the driving arm and then the swing disk rotates reversely in such a direction that the tone arm can make the lead-in movement.

At this moment, two rubber rings mounted on the chucking arm end of the swing disk catch the T.A. driving board under the tone arm by the operation of a guide hole of the mechanical chassis, and tone arm moves in the same direction as the swing disk movement.

At some point of the first half revolution of the swing disk (in the return direction), although the T.A. driving board under the tone arm has a tendency to move owing to the catching of two rubber rings mounted on the chucking arm end of the swing disk, the arm rest stops the tone arm, making only the swing disk slide.

At some point of the second half reverse revolution of the swing disk (in the lead-in direction) in the same way, the T.A. driving board under the tone arm is caught and the tone arm moves in the lead-in direction.

At the same time, the disk size selector is set by moving the S.S. arm with the peripheral part of the swing disk.

When the L.I. adjusting board fixed on the T.A. driving board under the tone arm hits against this disk size selector, the lead-in movement of the tone arm is stopped.

After that, two rubber rings mounted on the chucking arm end of swing disk continue to catch the T.A. driving board, and swing disk slides while turning. At some point of time, the two rubber rings mounted on the chucking arm end release the T.A. driving board under the tone arm by the operation of guide hole of the mechanical chassis.

When the movement of the swing disk is completed, the groove of the swing disk makes the lifter go down, and then the stylus is carried up to the lead-in groove position of the record, finishing the Auto Start Movement.

### 3) REPEAT MOVEMENT (Fig. 3-4)

By indicating a repeat number by the use of the repeat knob, the repeat cam is set and also link lever pulls the release cam (triangle shape) by a spring usually.

Owing to that, this release cam is hid under the mechanical chassis and does not jut out from the guide hole part of the mechanical chassis, even after the tone arm having automatically returned, the movement of catching the T.A. driving board is continued and then the auto lead-in motion of the tone arm is made continuously by the timing of the mechanical chassis guide hole.


Also, during this lead-in motion, by the second half revolution of the main gear, the groove of the main gear moves the release lever, pulling the feeding levers, and turns back the repeat cam and also the repeat knob is returned one step of repeat number indicate. Therefore, when the repeat action of a repeat number indicated on the repeat knob is completed, the repeat knob returns back at the position OFF, and the auto-return movement, afterward, makes the same as the above-mentioned auto-return movement, and the power supply is turned off automatically after the tone arm having auto-returned.


When an auto-cut is required during the repeat movement, to set the repeat knob to the position OFF makes the repeat movement release.


### 4) AUTO-CUT MOVEMENT

When a record is required to stop playing, turn the cuing knob to the position AUTO-CUT.

The manual check lever is pulled and the manual cam is also pulled by the link rod (2), pushing the start lever and the sensor lever, and then the above-mentioned auto-return movement is made. (In this case, the repeat knob is required to set at the position OFF).

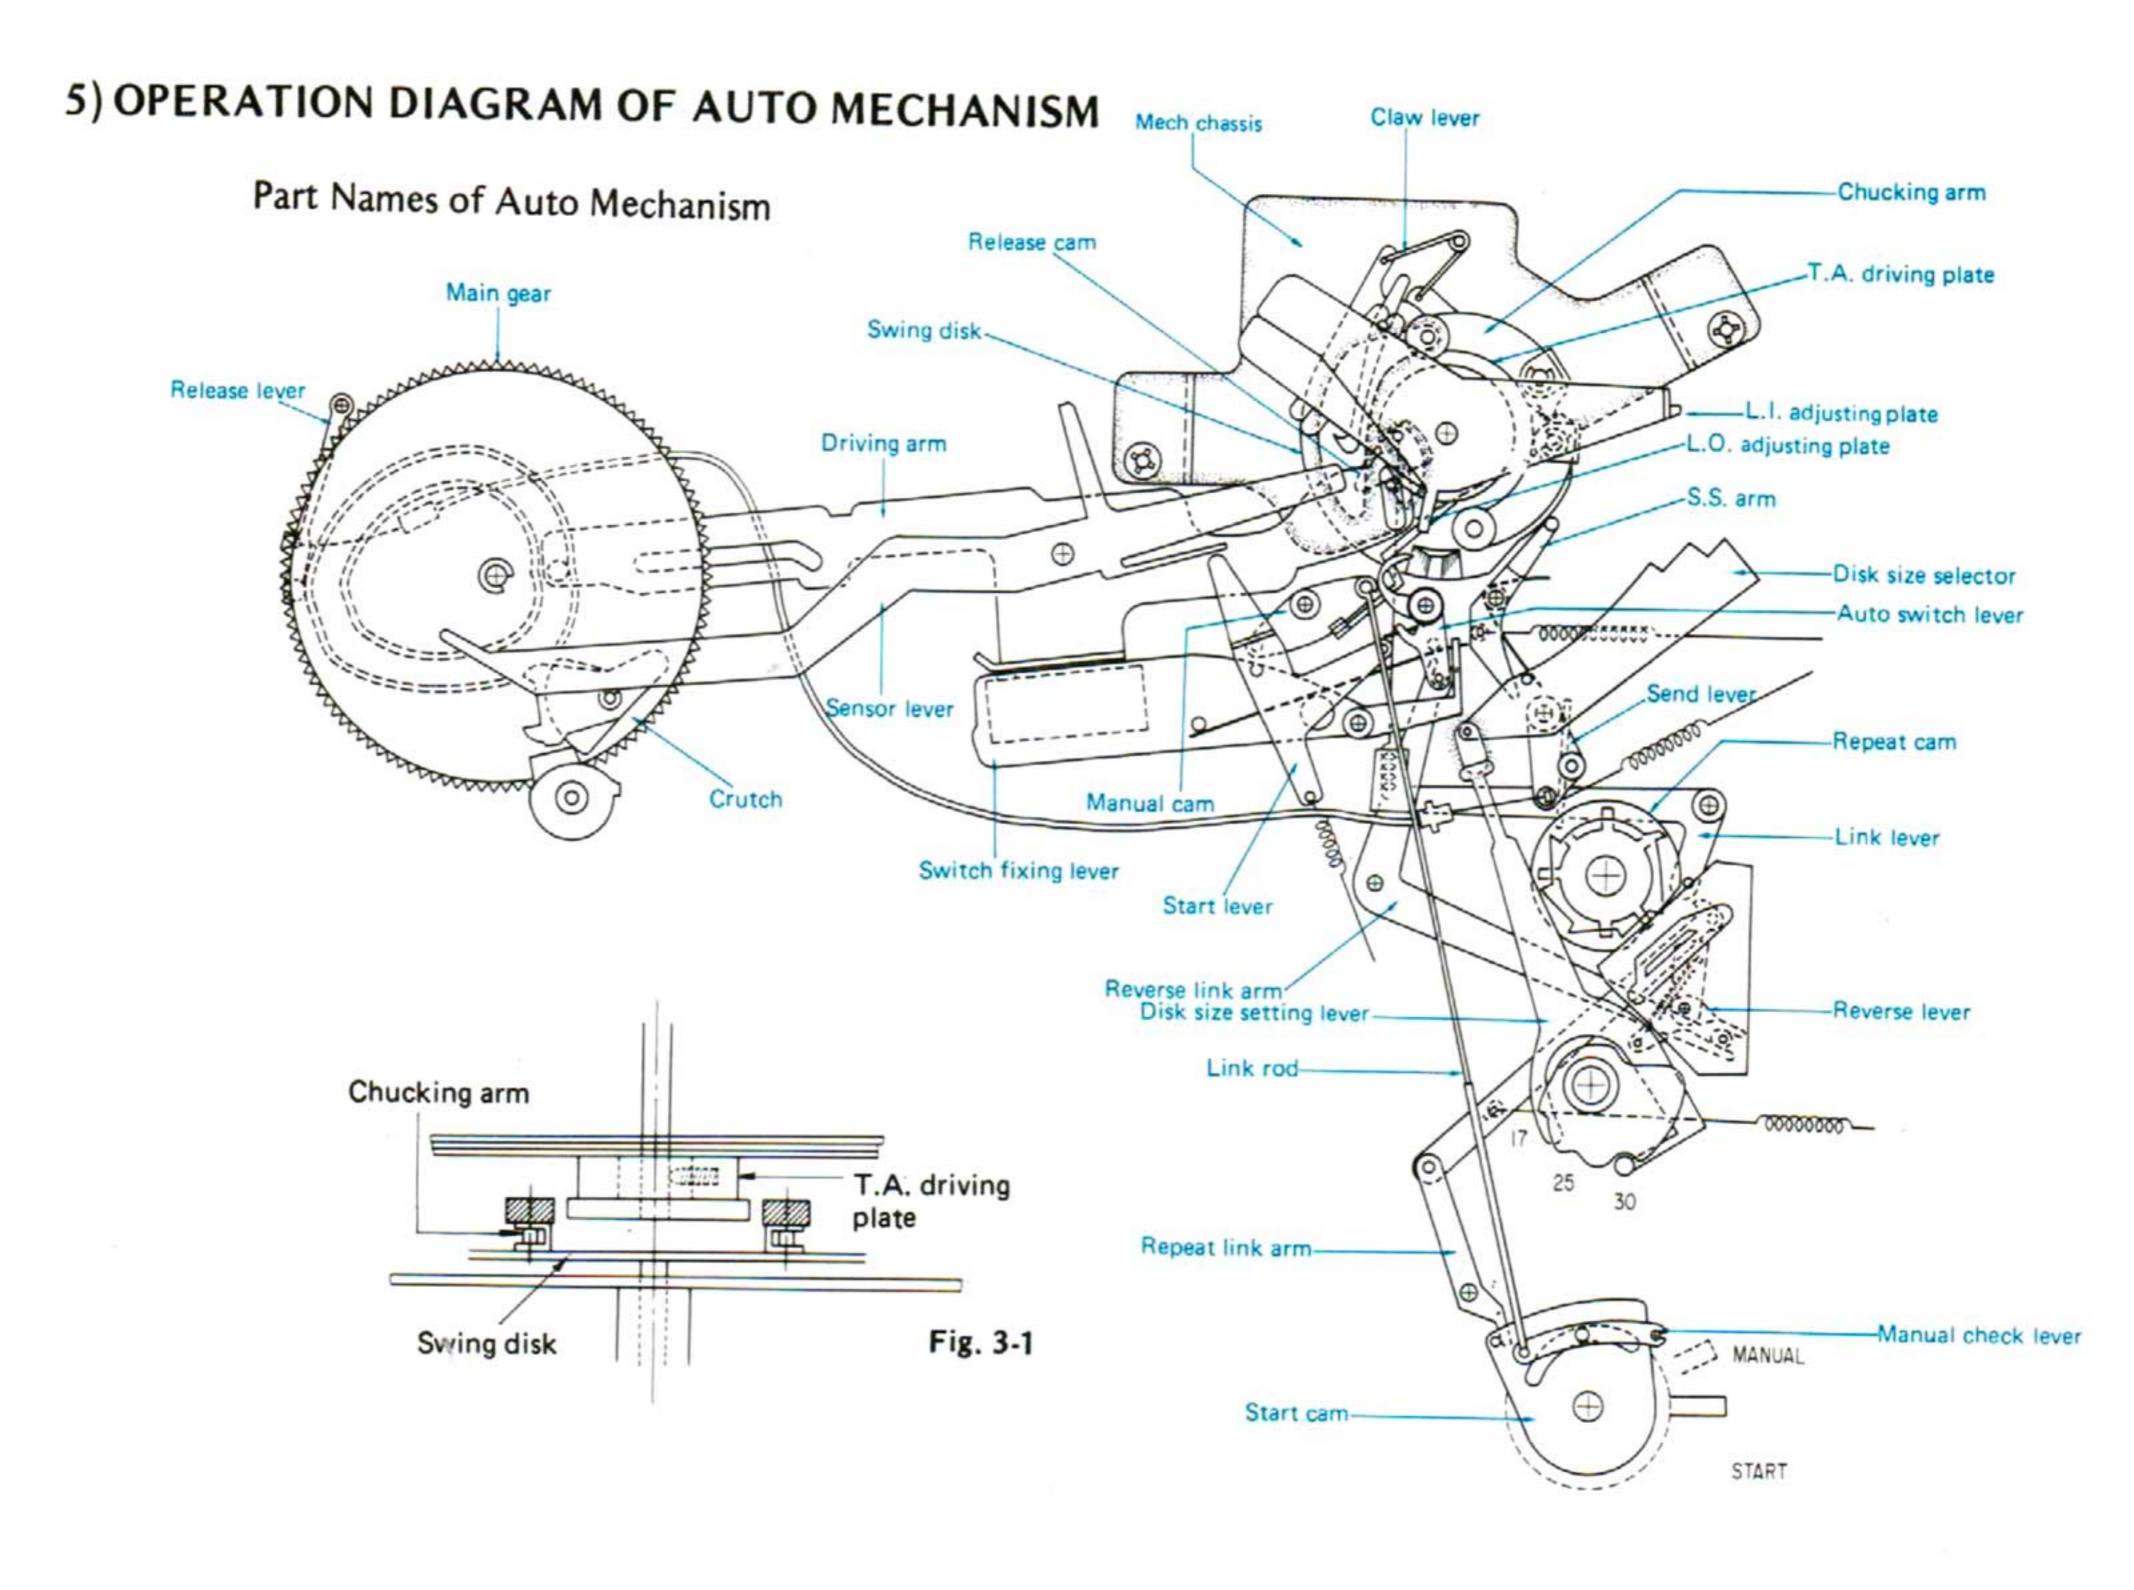

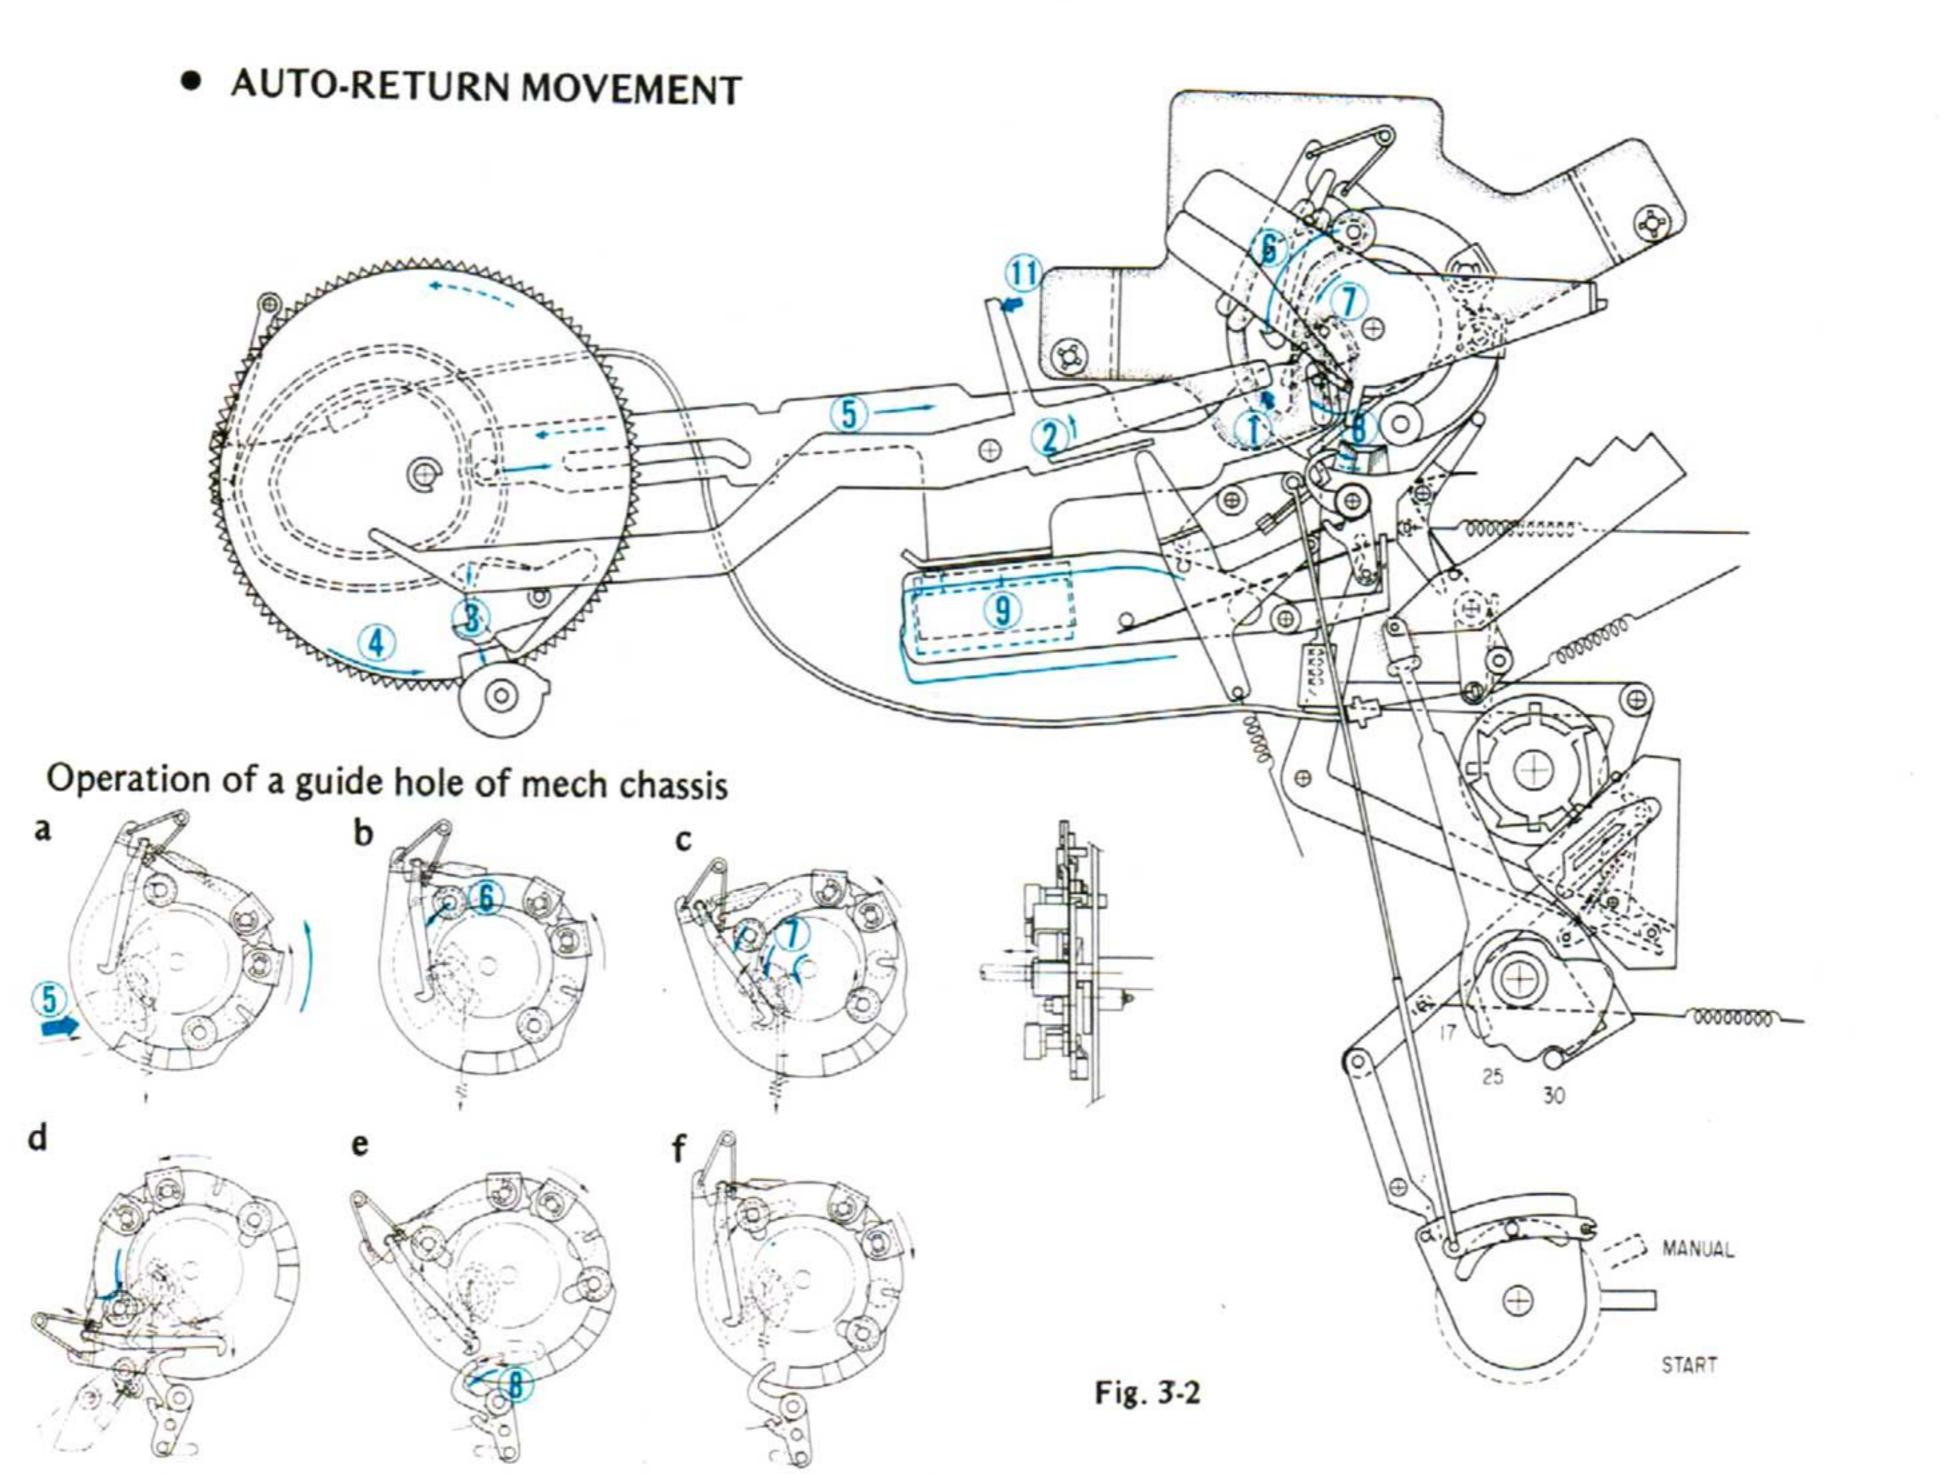

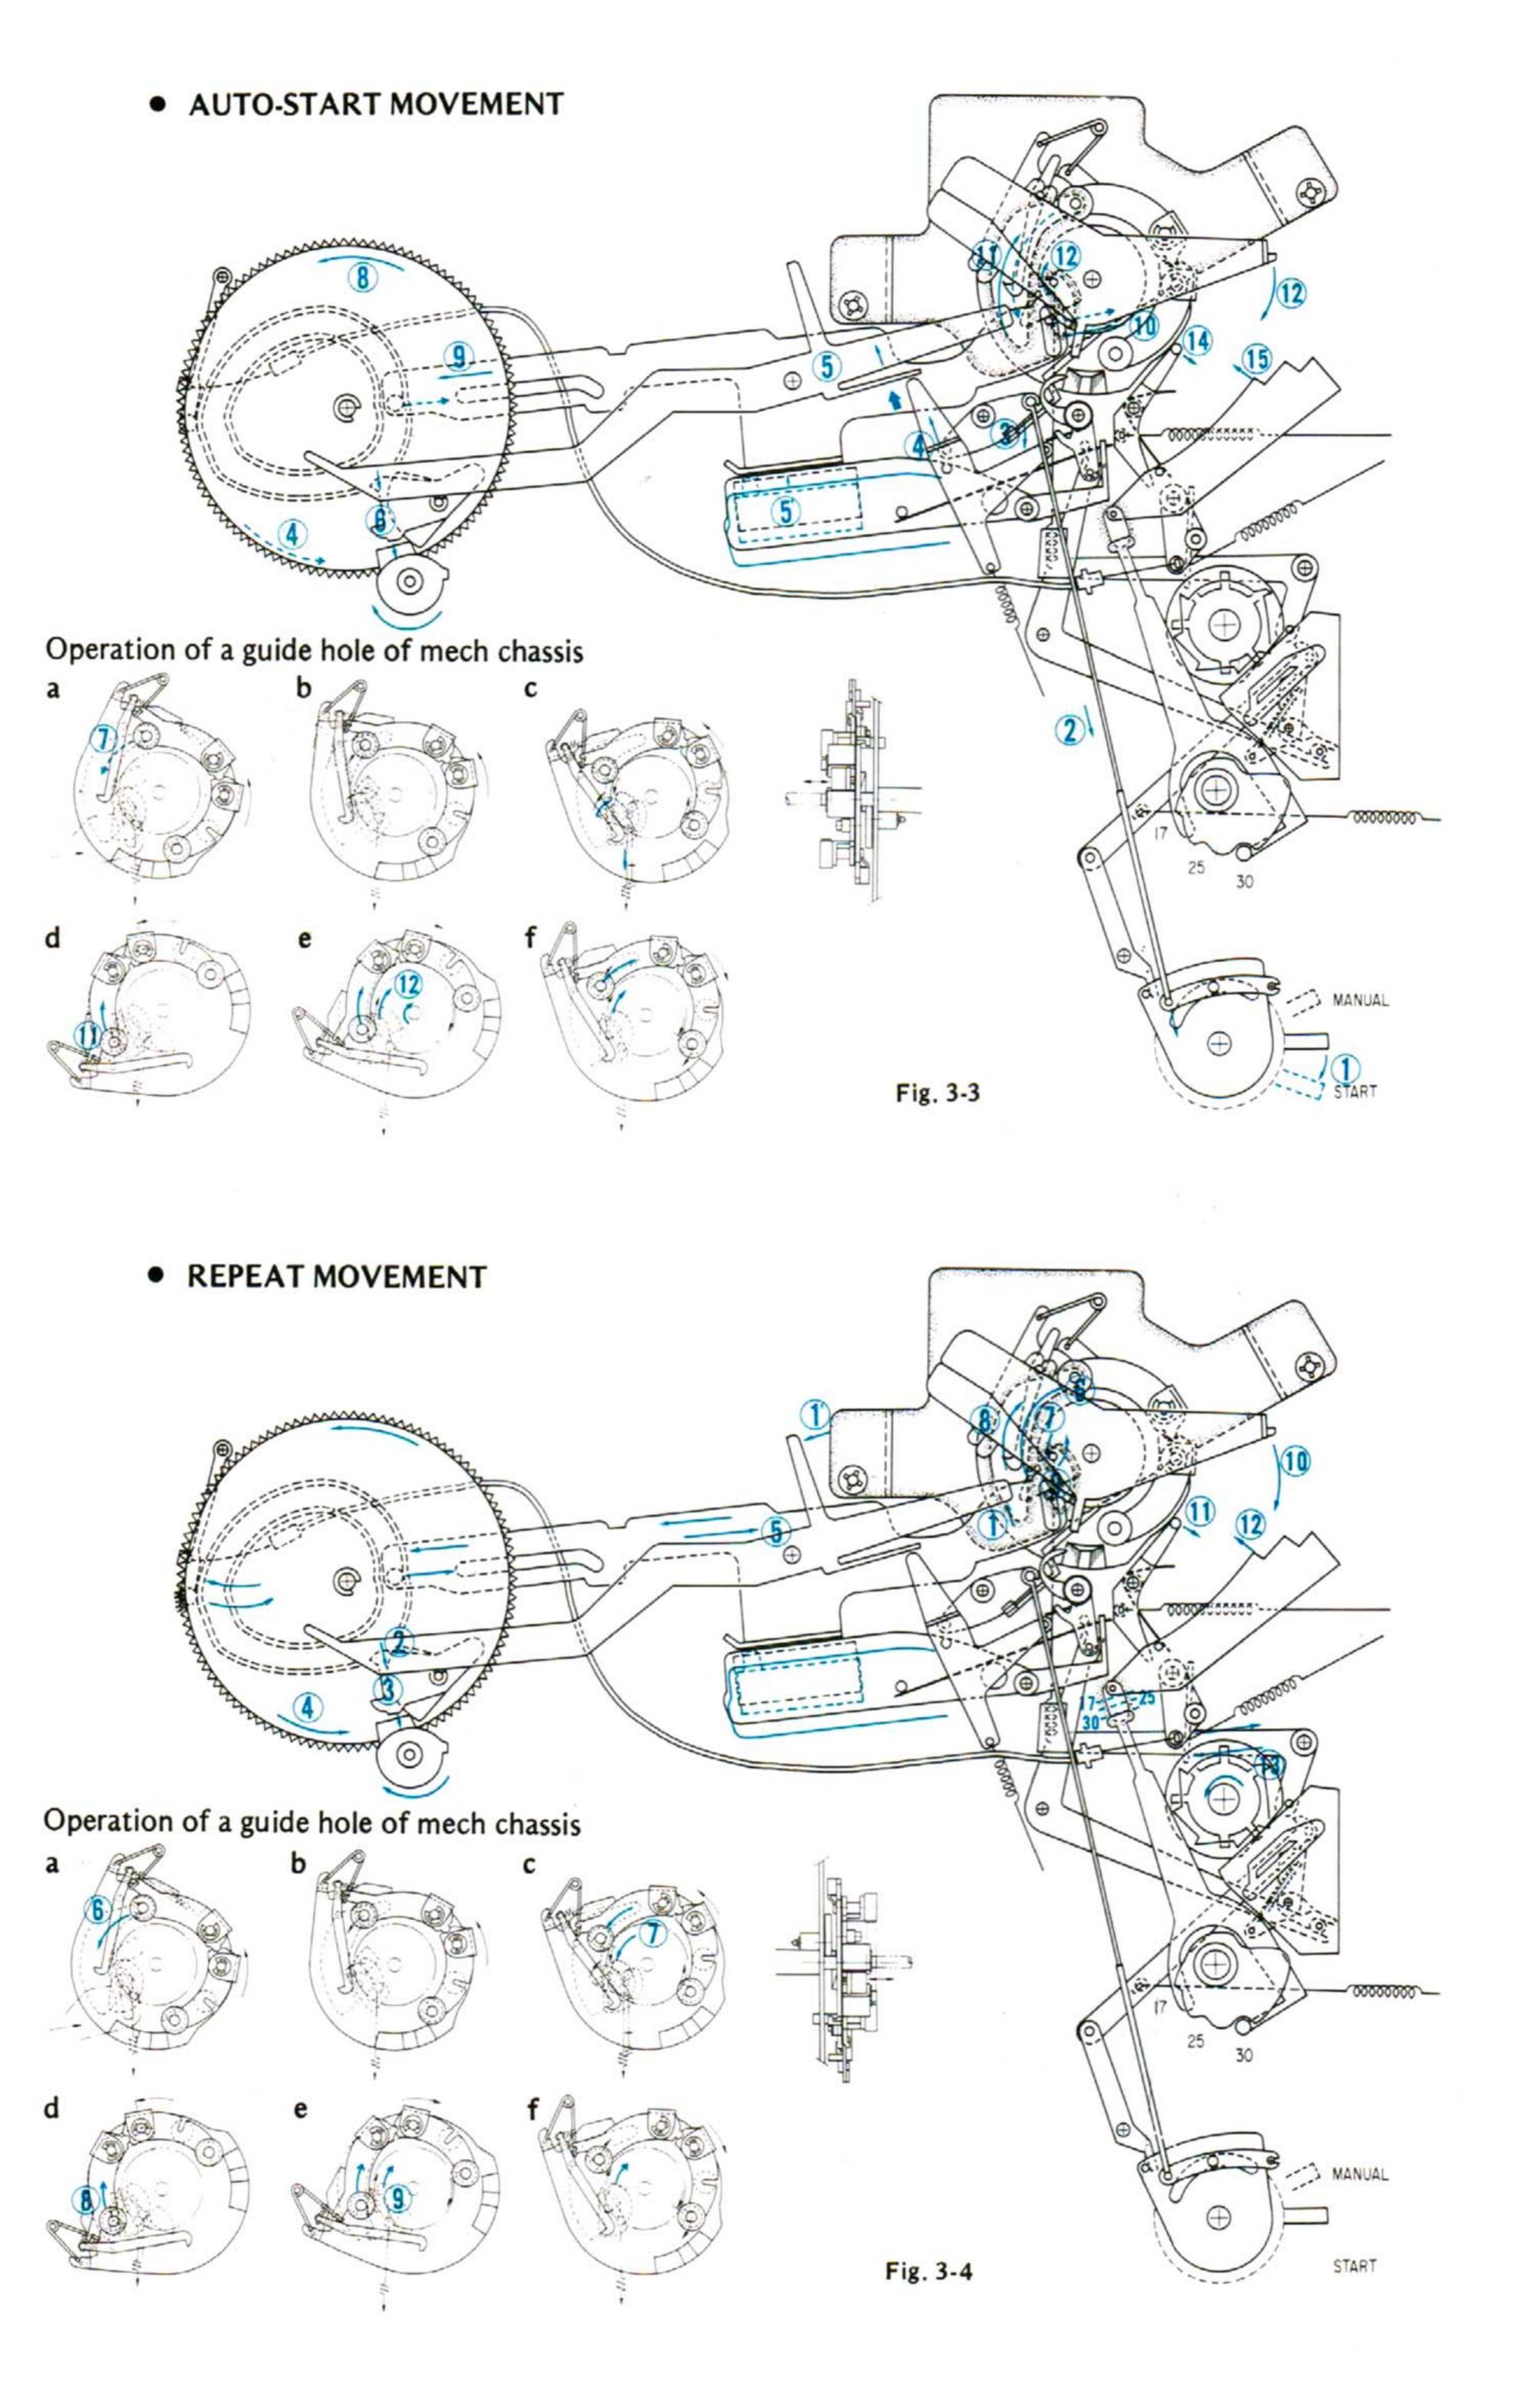

## 4. MAIN PARTS REPLACEMENT

## 1) Replacement of Main Chassis Ass'y. (See Bottom View on page 7)

- 1. Extract the knobs of Repeat and Size Selector.
- 2. Remove 15 pcs. of screws No. 34.
- 3. Take the Bottom Plate off.
- Remove 3 pcs. of screws No. 13, one pc. of screw No. 39 and No. 40.
- 5. Take off the shield plate over the Circuit Board, S-0012.
- Disconnect the lead wires soldered on the Circuit Board, S-0012.
- Disconnect the lead wires soldered on the Circuit Board, S-0020 from the Circuit Boards, S-0018 & S-0019.
- 8. Pluck out the connectors of each Circuit Board on chassis.
- 9. Remove 6 pcs. of Nuts No. 36.

## 2) Replacement of Tone arm Ass'y (See Exploded View on page 10)

- 1. Take out chassis (See Replacement 1).
- 2. Loosen the Hex screw No. 43 with T.A. driving Board.
- 3. Remove 4 pcs. of screws No. 50.
- 4. Take off the Tone arm base Ass'y (SR-737/SR-7090 only).
- 5. Loosen the screw No. 52. (SR-737/SR-7090 only).
- Take off the Light Screening Plate No. 53. (SR-737/SR-7090 only).
- 7. Loosen the Hex screw No. 54.
- 8. Pull the Tone arm Ass'y upward.

## Installation of T.A. driving Board Ass'y. (See Exploded View on page 10)

- 1. Put the Tone arm on the Arm rest.
- 2. Fix the T.A. driving Board Ass'y as Fig. 4-1, 4-2.
- 3. Confirm that the Tone arm moves smoothly.

## 4) Installation of Light Screening Plate. (See Exploded View on page 10)


- 1. Put the Tone arm on the Arm rest.
- 2. Fix the Light Screening Plate as Fig. 4-3, 4-4.
- 3. Confirm that the Tone arm moves smoothly.


## 5) Installation of Cueing knob Ass'y. (See Exploded View on page 10)


- 1. Set the Cueing Cam to OFF position as Fig. 4-5.
- 2. Set the Connection Pin No. 13 to Cueing Cam.
- 3. Set the Cueing Knob No. 4 to Mark \_ position on panel.


## 6) Installation of Insulators (See Bottom View on page 7)


Since pressure on each insulator differs at each corner, the springs are distinguished.

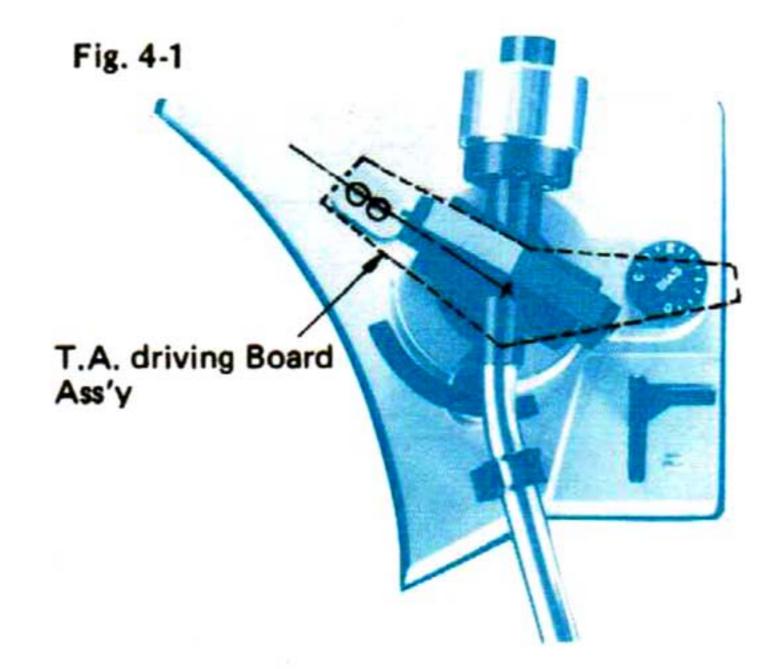

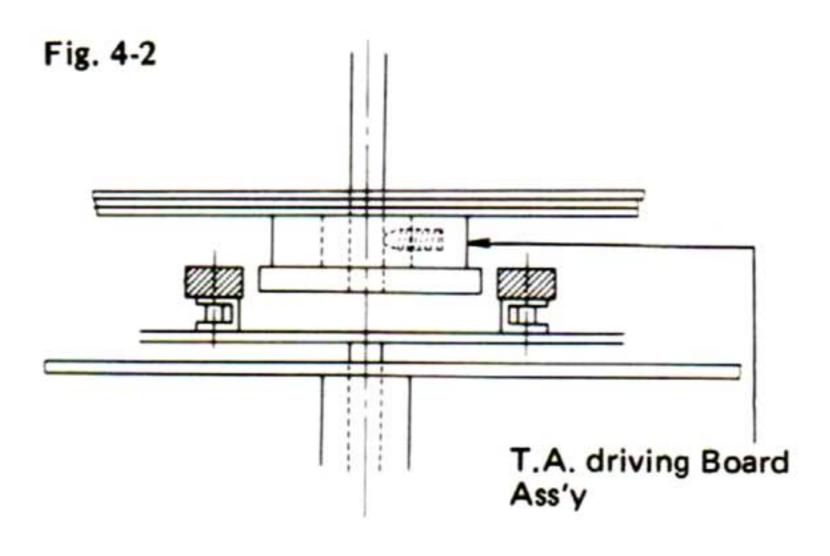


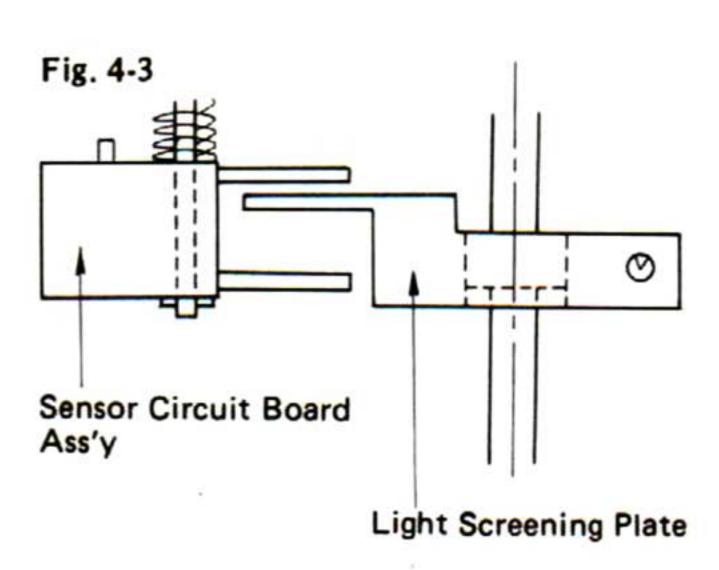

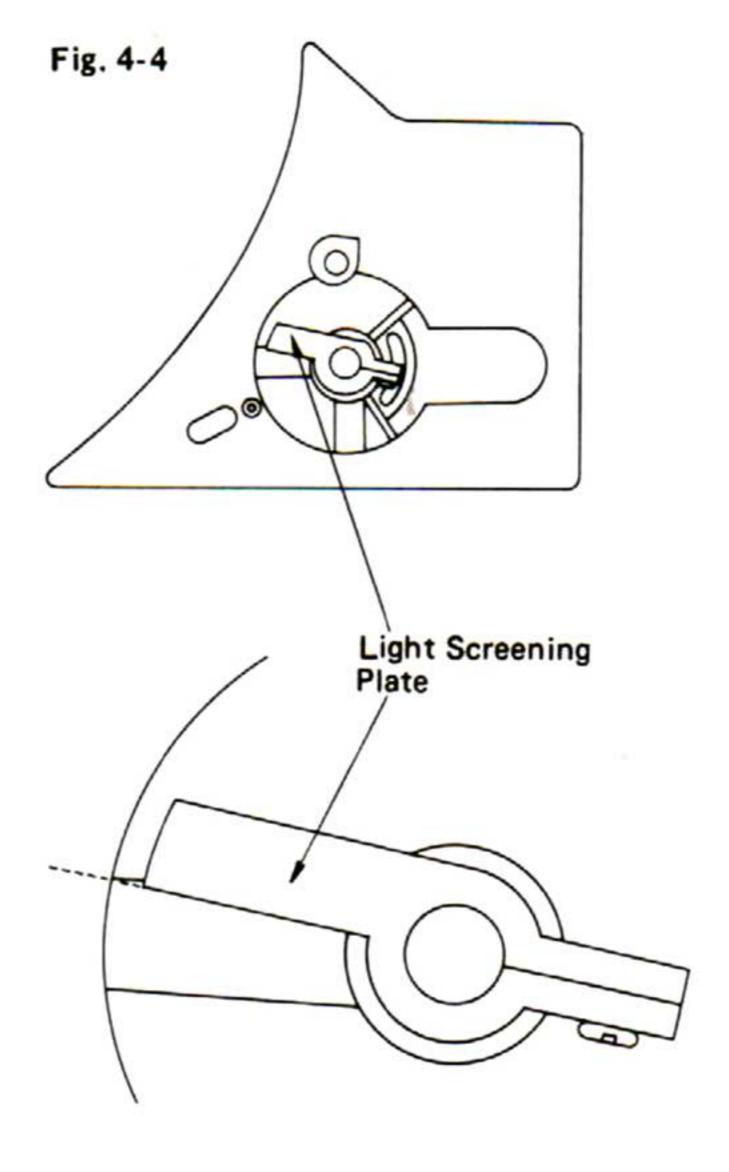


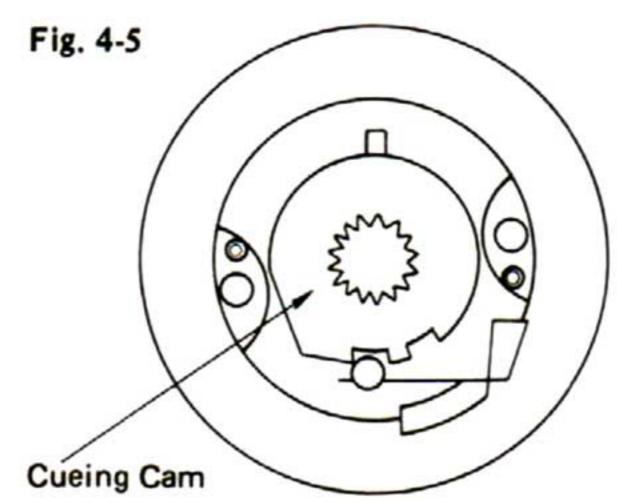

## 5. MECHANISM PARTS LOCATION AND PARTS LIST

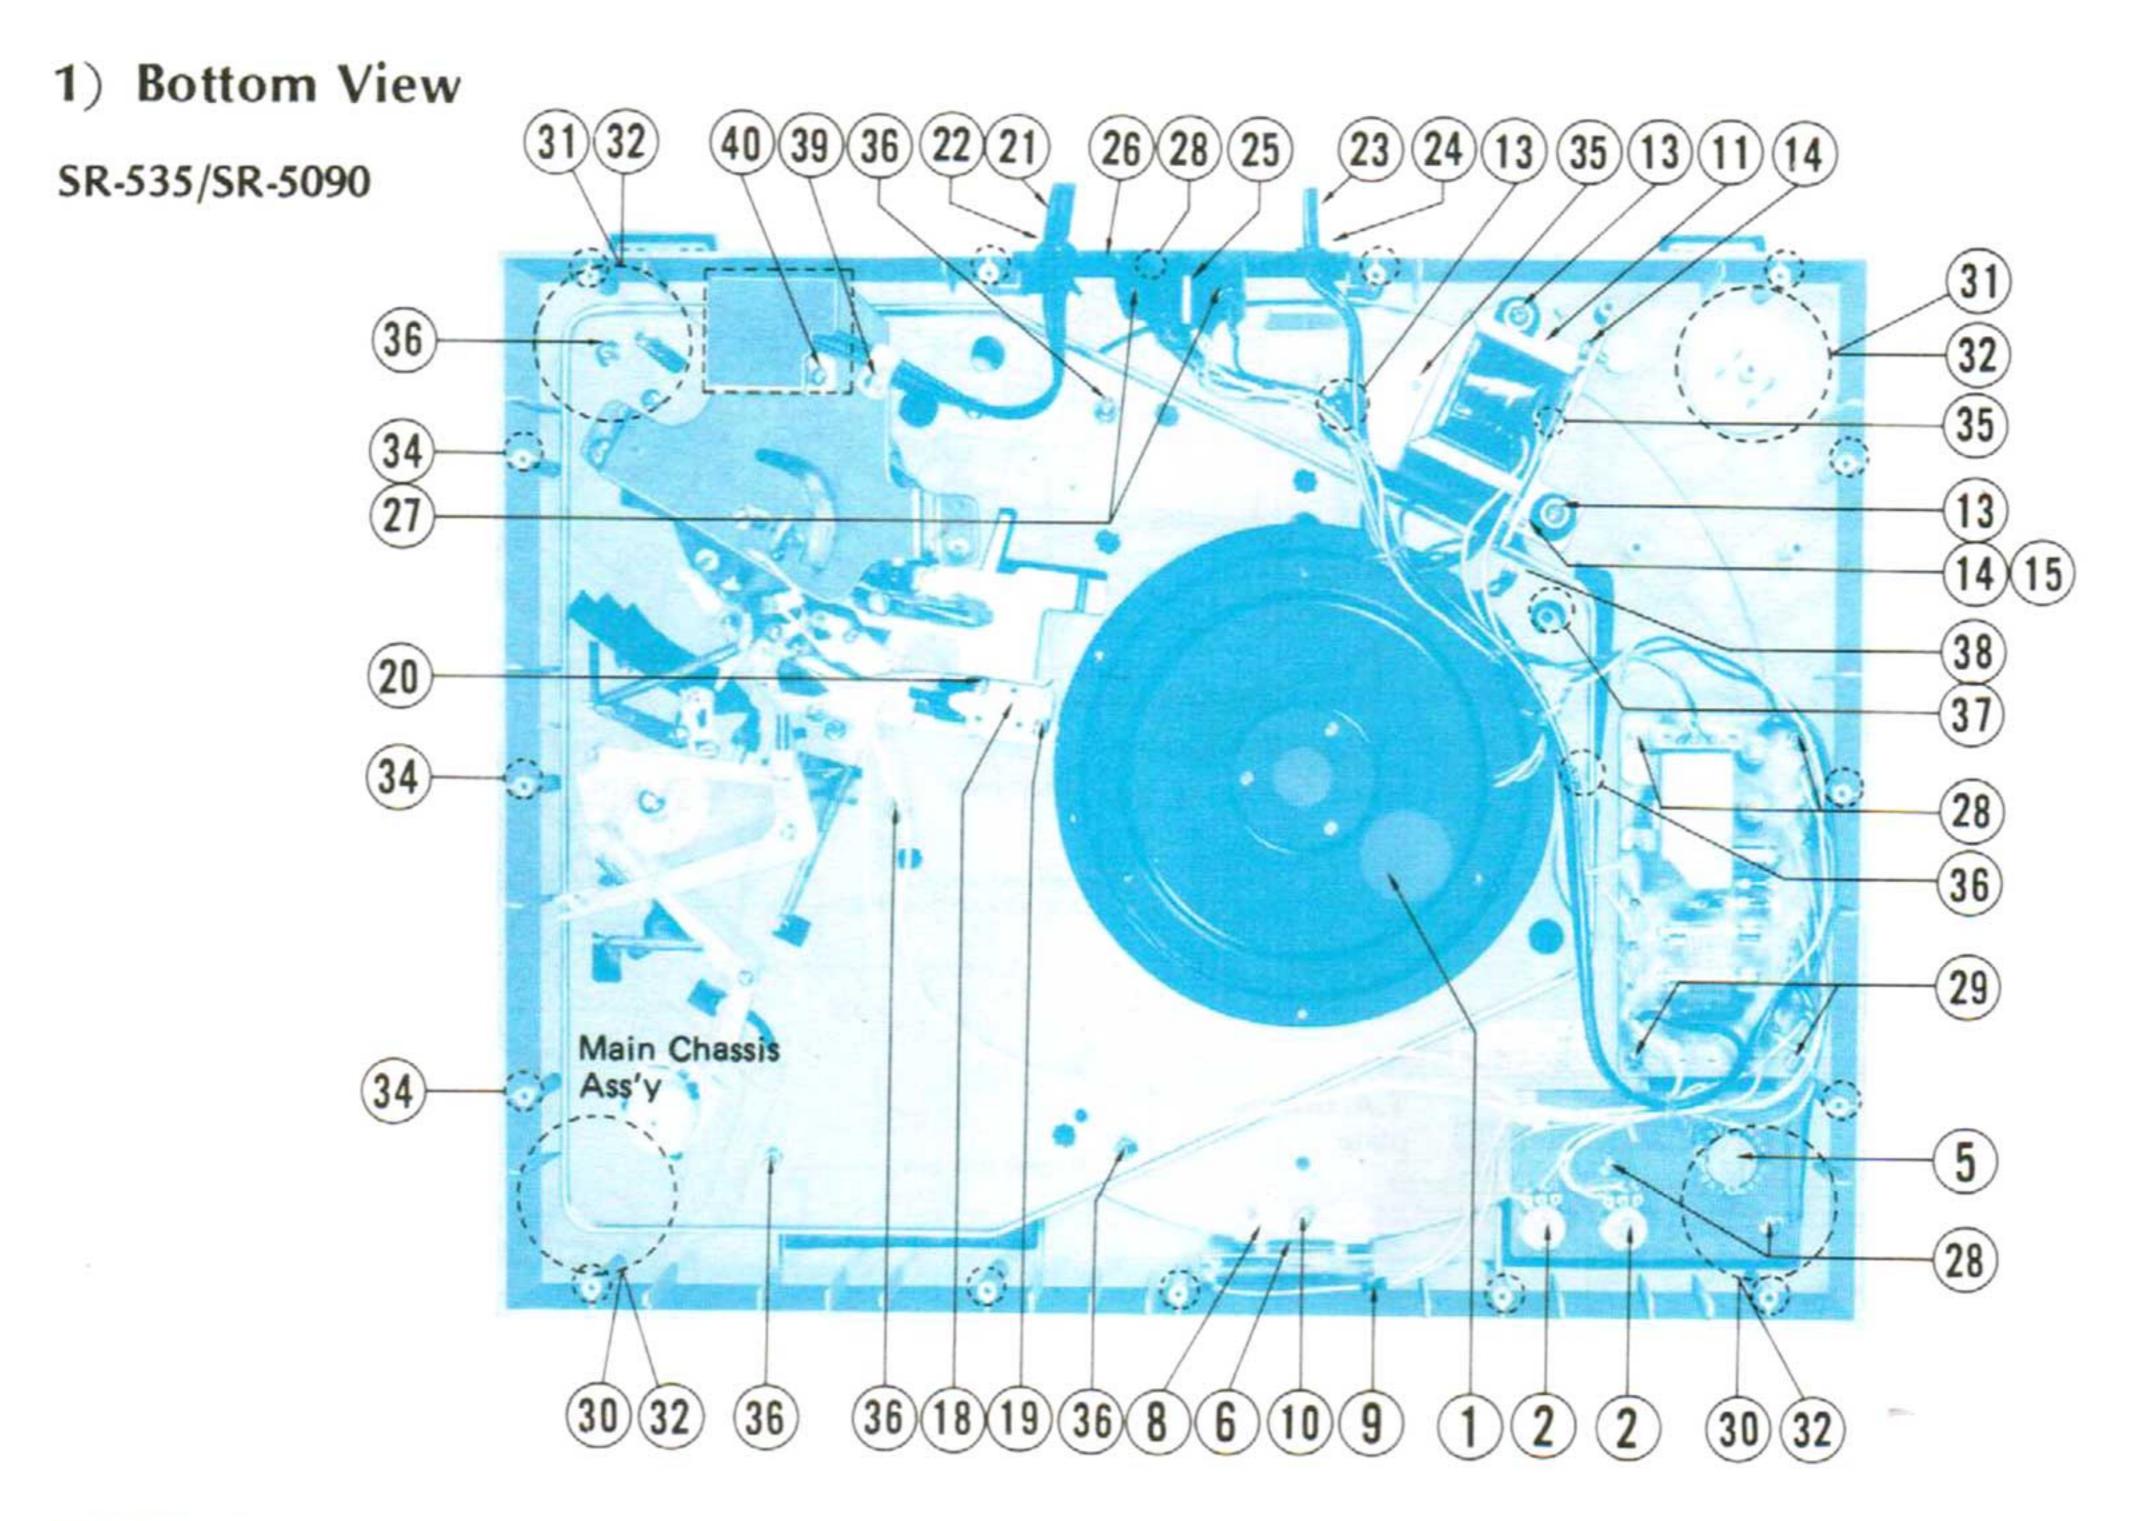

SR-737/SR-7090

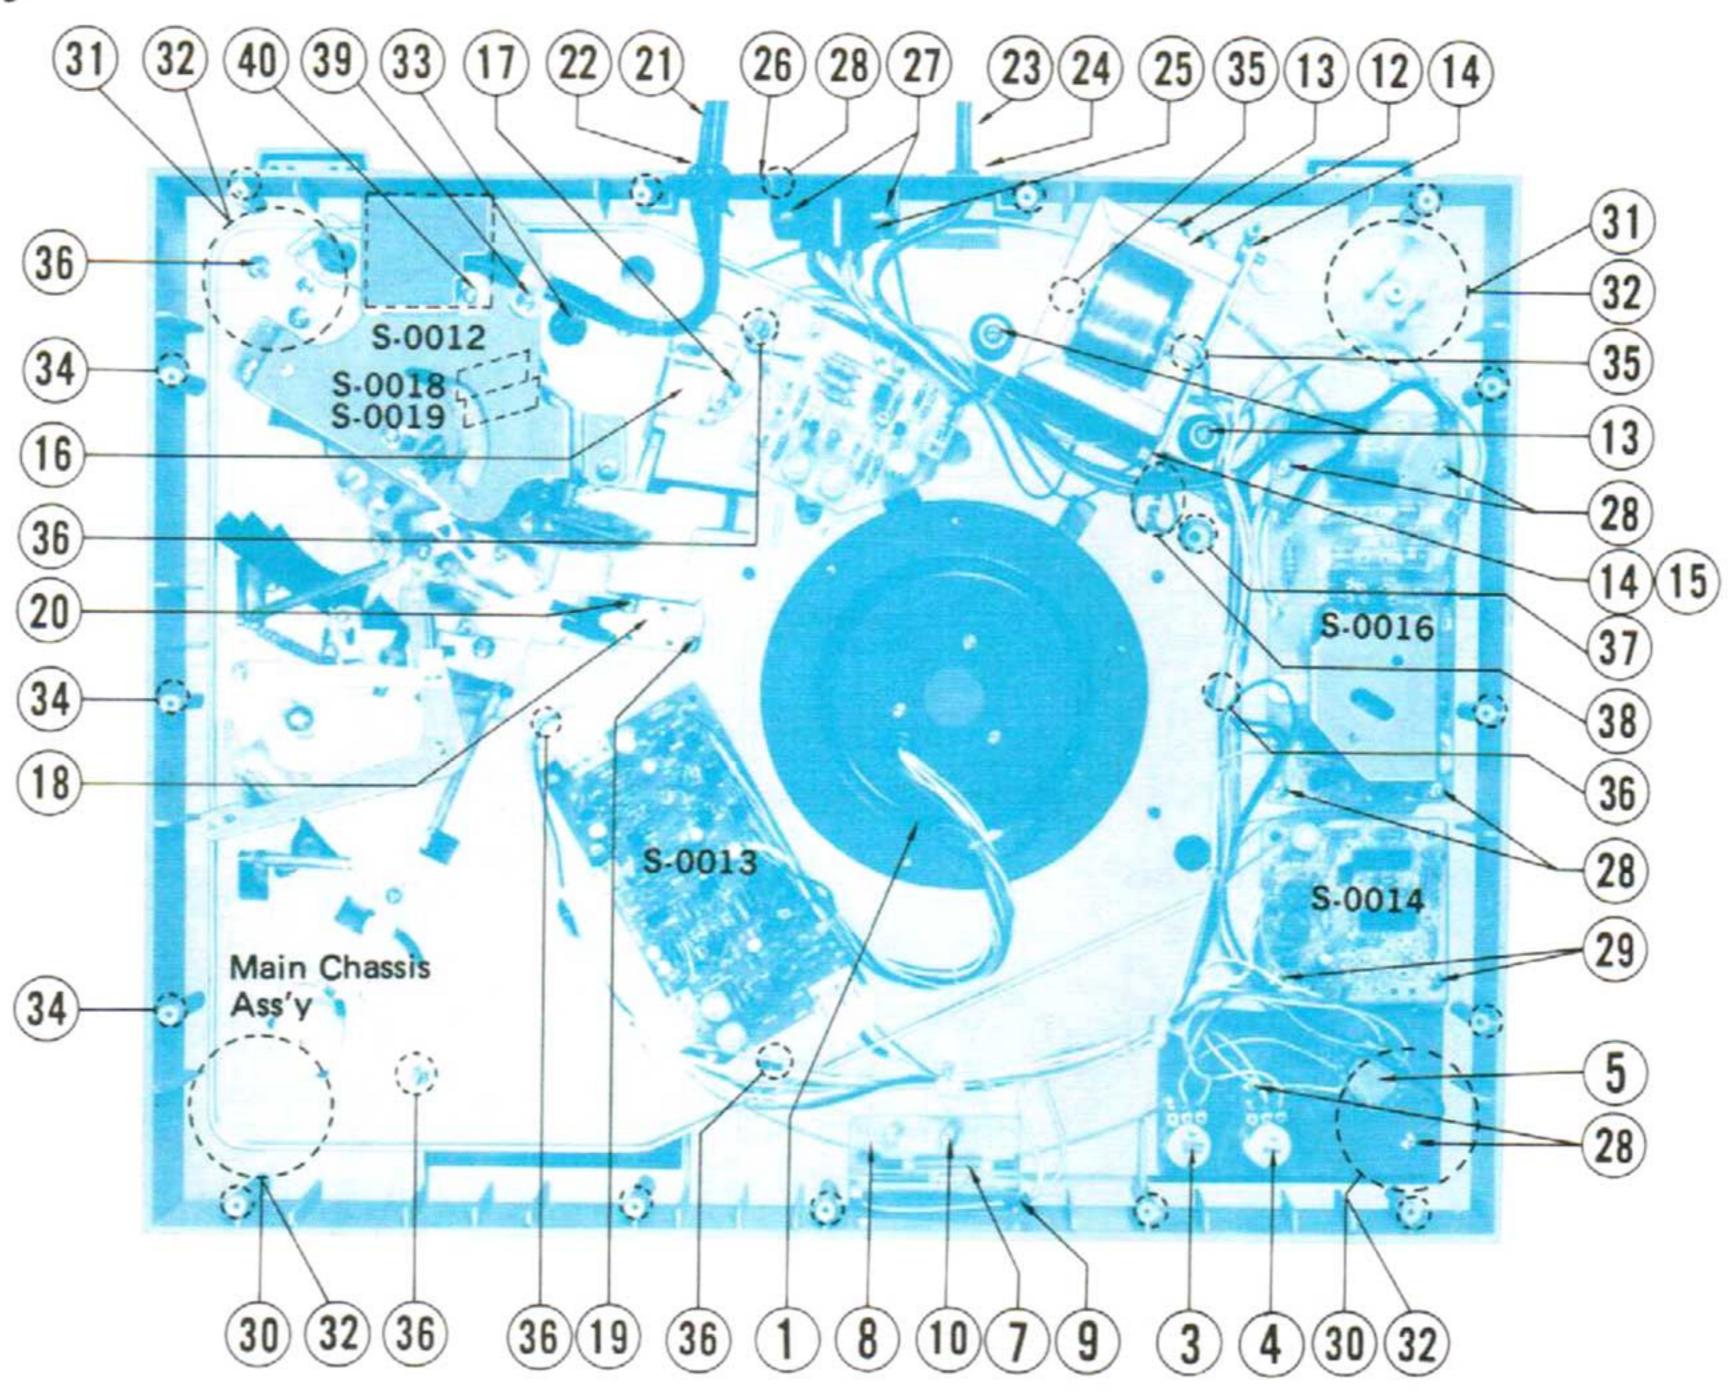


With units sold in U.S.A., Canada and certain European countries, no cartridge is provided.

Par	ts No.	Stock No.	Description	Par	ts No.	Stock No. D	escription	
1		43204	기계 이번 그는 그리고 있는데 전에 가장하면 보고 있다. 아니라	And the second s	22		4002694	Power Transformer
2	VR733,	43205 745 10053		Pitch Control	12	PT 01	4002700	EU, BS (SR-535) Power Transformer XX (SR-7090)
3	VR733	10051		3)			4002702	Power Transformer (SR-737)
4	VR745	10053	(33 rpm) 80 Volume 40 kΩ E	(SR-737, SR-7090)			4002704	Power Transformer EU, BS
			Pitch Control (45 rpm)		13		5502650 5162540	Flowting Rubber, transformer S Type Screw
5	S 702	11018	30 Speed Selector S (SR-535, SR-737)		14 15		5101862 5122560	BSA Type Screw M4 x 8 TLE Type Washer 4¢
		11018		witch	16	SL 701		Preasure Magnet (SR-737, SR-7090 only)
		11017		witch	17		5109122	BT Type Screw M3 x 8 (SR-737, SR-7090 only)
6	NL701	04101			18 19 20	S 701	1160250 5162720 5103545	Micro Switch PSA Type Screw M3 x 16 PT Type Screw M3 x 16
7	NL701	04101	40 Neon Lamp NE-2HUWSA-6		21	,	3810290 3810310	P.U Output Cord EU, CSA, BS (SR-5090, SR-7090) P.U Output Cord XX, UL
8		52622						(SR-535, SR-737)
10	DT 04	55028 51091	22 BT Type Screw !	M3 x 8	22 23		3910570 3800420	Strain Relief (8.2¢), output cord Power Cord XX, CSA, UL
11	PT 01	40026	XX (SR-535, SR	-5090)	24		3800421 3910600	Power Cord EU Strain Relief (5.2φ), power cord XX, CSA, UL

Parts No.	Stock No.	Description
25	119051	(SR-5090, SR-7090) (SR-535
	119052	Voltage Selector EU, BS SR-737
26	510922	2 BT Type Screw M3 x 8 (black)
27	510354	
28	516270	
29	510912	
30	707209	
31	7072100	
32	510776	
33	5616290	
34	5162570	WT Type Screw M3 x 14, bottom plate
35	5107764	the state of the s
36	5110261	
	5121360	
	5120161	
37	5182361	
	5121360	
	5182361	
38	5162700	
39	5162700	
40	5103543	

2) Top View

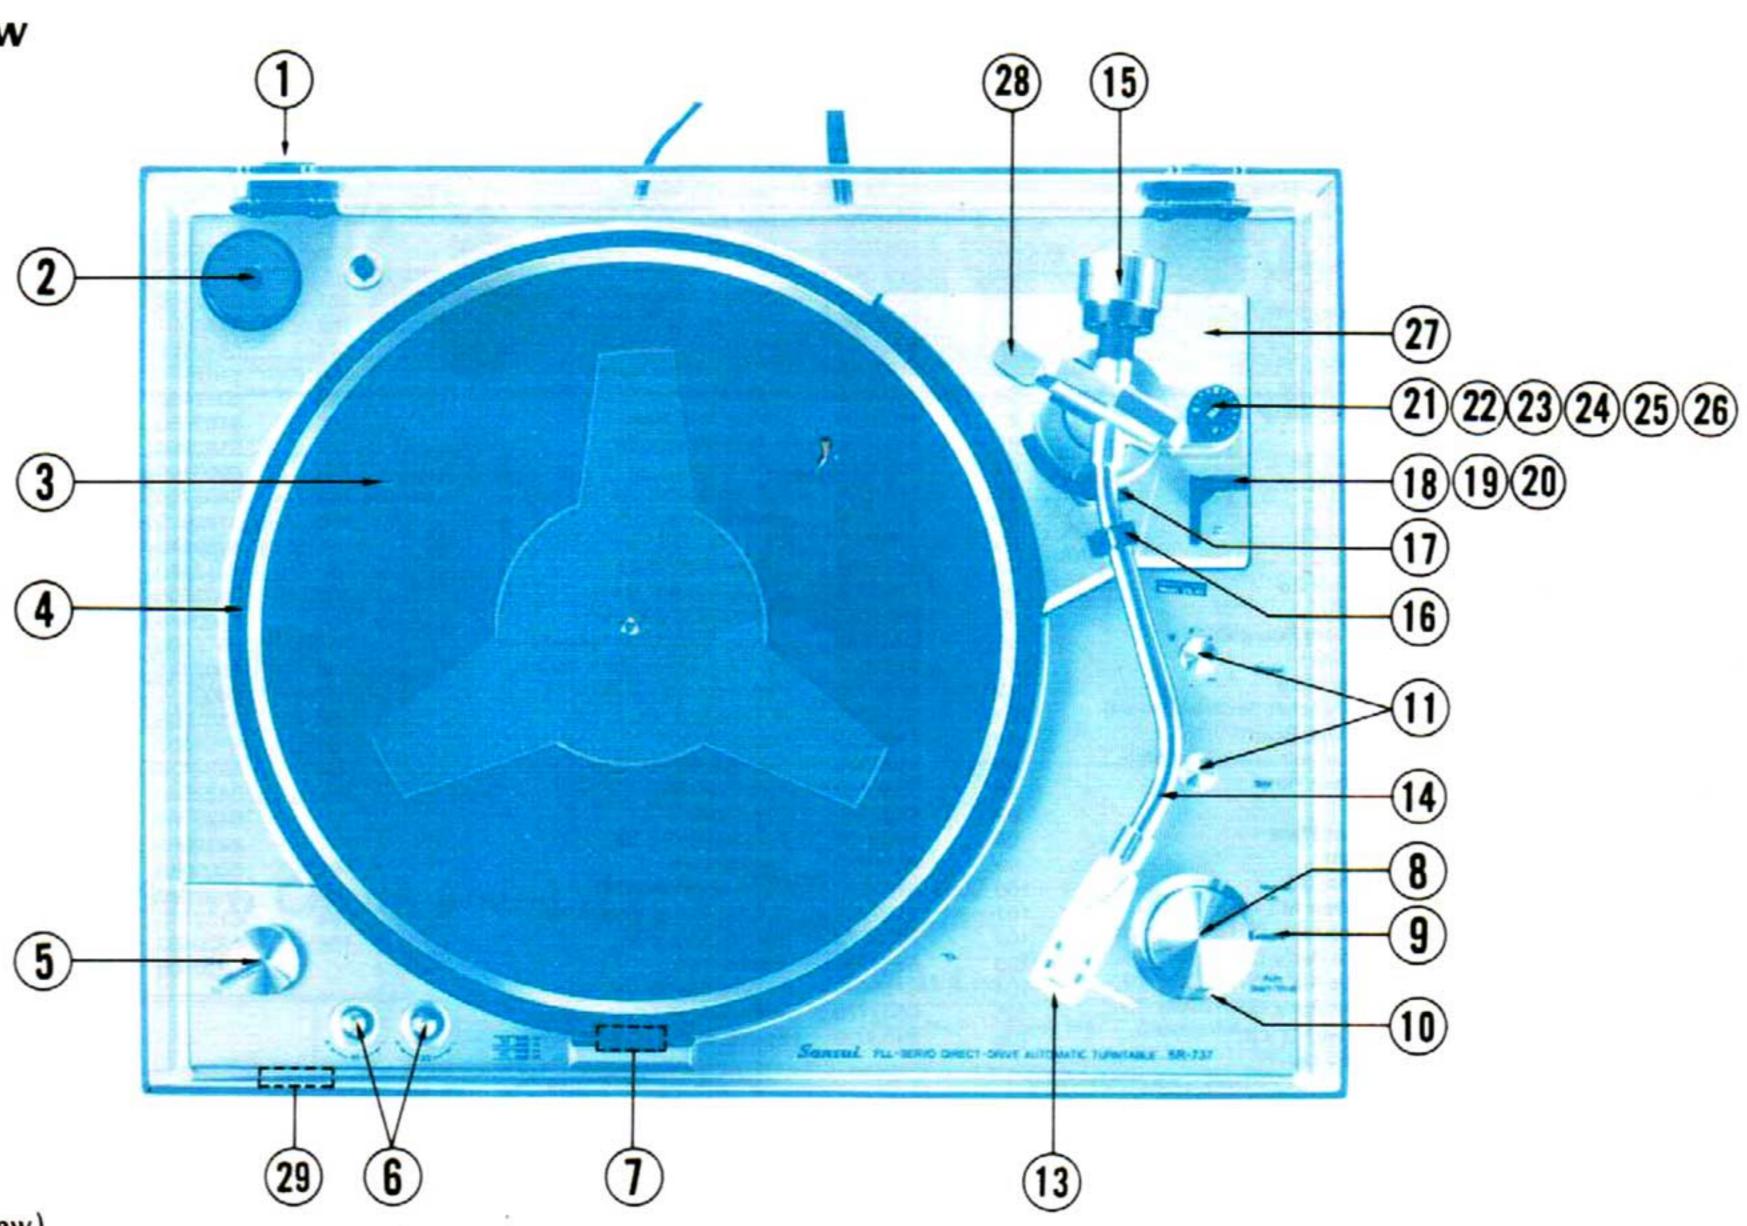

Parts List (Top View)

Parts No.	Stock No.	Description	Parts No.	Stock No.	Description	Parts No.	1
1	7012161	Dust Cover Ass'y		J 4940230	Stylus (SN-50) (SR-535.	_	8
	, 5062342	Dust Cover		5012090	Stylus Cover SR-5090)		
	6922330	Auto Hinge		5192160	Screw Ass'y XX, AS only	21	-
	6922340 5502711	Auto Hinge Plate Rubber Cushion		4310340	Cartridge Ass'y (SV-43) (with stylus, stylus (SR-737		
2	5101163	B Type Screw M4 x 10			cover, screw ass'y) SR-7090)	22	
3	6172040	45 Adaptor		4940220	Stylus (SN-43) XX, AS	22	- 0
3	5502901	Rubber Mat. turntable		5012080	Stylus Cover only	23	13
		XX, UL (SR-535,		5192180	Screw Ass'y	24	
	5502891	(SR-5090, SR-7090) SR-737)	14	7092670	Tonearm	25	
	3302891	Rubber Mat. turntable EU, CSA, BS			(without main weight)	25	
4	6112183	Turntable (Platter)			(SR-535, SR-5090)		
	0112103	(SR-535, SR-5090)		7092680	Tonearm		
	6112191	Turntable (Platter)			(without main weight)	26	
	0.12101	(SR-737, SR-7090)			(SR-737, SR-7090)	27	- 3
5	5312310	Knob, speed selector	15	6912570	Main Weight	21	
6	4312280	Knob, pitch control	16	6622260	Arm Rest Ass'y (with screw)		
7	5442030	Illuminator	17	7082300	Tonearm Guide Ass'y		
8	5312320	Knob, cueing (1)			(with SS Type Setscrew)		117
9	5312360	Knob, cueing (2)		5105520	SS Type Setscrew		
10	6502870	Knob, cueing (3)	10	7050440	M2.6 x 3, tonearm guide		25
11	531239	Knob, repeat & Record size	18	7052410	Lifter Lever Ass'y		
12	6642270	Head Shell		5105500	(with SS Type Setscrew)	28	1
10000 h		(SR-535, SR-5090)		5105502	SS Type Setscrew	29	
	6642280	Head Shell	10	6012510	M2 x 3, Lifter Lever	23	
	(27.52.550)	(SR-737, SR-7090)	19	6012510	Lifter Cam Ass'y	_	
13	4310370	Cartridge Ass'y (SC-50)] (SR-535,	20	7012170	(with P Type Washer)		
	(	(with stylus, stylus SR-5090)	20	7012170	Lifter Cam Plate Ass'y (with screw or washers)		
	1	cover, screw ass'y) XX, AS only			(With screw or washers)	_	


Parts No.	Stock No.	Description
	5103304	P Type Screw M2 x 6.
		lifter cam plate
21	7102090	I.F.C. Knob Ass'y
		(with SS Type Setscrew)
	5105521	SS Type Setscrew
		M2.6 x 4, I.F.C. knob
22	6903370	Click Spring Ass'y
		(with steel boll 2¢)
23	6903360	Cushion Spring
24	6012520	Canceller Cam
25	7052420	Canceller Lever Ass'y
		(with E Type Washer 1.5¢)
	5151001	E Type Washer 1.5φ,
		canceller lever
26	6903380	Canceller Spring
27	7092690	Tonearm Base Ass'y
		(with lifter) (SR-535)
	7092770	Tonearm Base Ass'y
		(with lifter) (SR-5090)
	7092700	Tonearm Base Ass'y
		(with lifter) (SR-737)
	7092780	Tonearm Base Ass'y
		(with lifter) (SR-7090)
28	5052130	Cap, adjust
29	5332091	Sansui Badge


## 3) Exploded View

### Parts List < Exploded View >

(SR-737, 7090 only)

Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
1	5312310	Speed Selector Knob		53	5042090	Light Screening Plate		107	5182960	CS Type Washer 2¢	
2	5312390	Repeat & Record Size Knob				(SR-737, 7090 only)		108	5182570	P Type Thrust Washer 4¢	
	7102100	Cueing Knob Ass'y		54	5106143	SC Type Hex Socket Setsc	rew M3 x 6	109	6903111	Spring, auto switch lever	
		(with 3, 4, $6 \sim 12$ )		55	7092670	Tonearm (SR-535, SR-509)		110	5182550	P Type Thrust Washer 3.5¢	<b>&gt;</b>
3	5312320	Cueing Knob (1)			7092680	Tonearm (SR-737, SR-709)	0)	111	6903200	Spring (4), SS arm	
4	5312361	Cueing Knob (2)		56	5182290	CS Type Washer 3φ		112	5151004	E Type Washer 3¢	
5	5109122	BT Type Screw M3 x 8				(SR-737, 7090 only)		113	6903162	Spring, SS arm	
6	6502870	Cueing Knob (3)		57	5232400	Circuit Board Holder		114	6592030	SS Arm	
,	5182970	CS Type Washer 8¢				(SR-737, 7090 only)		115	6032180	Release Wire	
8 9	5232450 5183040	P Type Felt Washer (2) 10.2¢ P Type Nylon Washer 10.2¢	1	58	7595621	S-0018 Circuit Board		116 117	6903262 5151004	Spring (10), lever base	
10	6903170	Board Spring				(SR-737 only)		- 118	6903130	E Type Washer 3¢ Spring, back lever	
11	6322010	Steel Ball (4)			7595961	S-0018 Circuit Board		119	5182960	CS Type Washer 2¢	
12	6012391	Cueing Cam				(SR-7090 only)		120	6502810	Back Lever	
13	5192090	Connection Pin		59	7595601	S-0019 Circuit Board		121	6632190	Lever Base	
14	5107867	PSA Type Screw M4 x 18				(SR-737 only)		122	5151004	E Type Washer 3¢	
15	5232470	Chassis Hold Washer 4 p			7595951	S-0019 Circuit Board		123	6502820	Disk Size Selector	
16	5312280	Pitch-Control Knob				(SR-7090 only)			7062340	Repeat Cam Ass'y (with 1)	24 ~ 130
17	5332091	Sansui Mark		60	5183020	P Type Nylon Washer 3¢		124	5182970	CS Type Washer 8¢	
18	5110261	H Type Nut M4 x 3.2			******	(SR-737, SR-7090 only)		125	6012411	Repeat Cam (2)	
19	5121360	S Type Washer 4 p		61	6903282	Spring, circuit board stopp	er	126	5182270	CS Type Washer 4 ø	
20	5120161	P Type Washer 4¢		-	7.00000	(SR-737, SR-7090 only)		127	5120161	P Type Washer 46	
21	5182361	P Type Washer M4.5 x 18		62	7102090	Bias Knob Ass'y (with Scre		128	6903070	Spring, repeat cam	
22	5162700	BT Type Screw M3 x 10			5105521	SS Type Setscrew M2.6 x			5182650	P Type Thrust Washer 6.2¢	•
23	6903270	Spring, pu cord		63	6903370	Click Spring Ass'y (with st	eel ball)	129	6012381	Repeat Cam (1)	
24	5103543	PT Type Screw M3 x 10		64	6903360	Spring, canceler cam		130	6522070	Friction Washer	
25	5032060	Shield Plate		65	6012520	Canceler Cam		131	6903220	Spring (6), link lever	
26	5162700	BT Type Screw M3 x 10		66	5151001	E Type Washer 1.5¢		132	6502850	Link Lever	
27	3910160	Nylon Cord Stopper		67 68	7052420 6903380	Canceler Lever Ass'y			7062350	Repeat Grooved Cam Ass'y	,
28	2593661	S-0012 Printed Board for con-		69	5105520	Spring, canceler lever SS Type Setscrew M2.6 x :	3			(with 133 ~ 138)	
29	3810290	PU Output Cord EU, CSA, BS	SR-535.		7082300	Tonearm Guide Ass'y (wit		133	6903191	Spring (3), reverse cam	
		(SR-5090, SR-7090)	SR-737		5103304	P Type Screw M2 x 6	11 05 /	134	5151002	E Type Washer 2φ	
	3810310	PU Output Cord UL, XX	) Sh-/3/	72	5124001	P Type Washer 2φ, lifter o	am plate	135	6502800	Reverse Lever	
30	5101862	BSA Type Screw M4 x 8		73	7012170	Lifter Cam Plate Ass'y (wi		136 137	6092020 5100946	Reverse Cam	
	7142100	Mechanical Chassis Ass'y		74	6012510	Lifter Cam Ass'y		138	6012363	BT Type Screw M3 x 12 Repeat Grooved Cam	
		(with 31 ~ 41 )		75	7052410	Lifter Lever Ass'y (with so	rew)	139	6903180	Spring (2), repeat link arm	
31	5202181	Mechanical Chassis			5105502	SS Type Setscrew M2 x 3		140	5182960	CS Type Washer 2 ø	
32	5151004	E Type Washer 3φ		76	5105640	SF Type Setscrew M3 x 3		141	6512170	Repeat Link Arm (2)	
33	6903101	Spring, chucking arm		77	6622260	Arm Rest Ass'y (with 76)	)	142	5151004	E Type Washer 3¢	
34	6502840 6903231	Claw Lever Spring (7), claw		78	5052130	Cap, adjust		143	6512160	Repeat Link Arm (1)	
	5183000	CS Type Washer 2¢		79	5182990	P Type Thrust Washer 2¢		144	5182970	CS Type Washer 8 ¢	
	5183030	P Type Thrust Washer 2.5¢		80	5502770	Rubber		145	6012450	Start Cam	
35	6592070	Swing Disk		81	6903120	Spring, link lever		146	5182960	CS Type Washer 2φ	
36	5151004	E Type Washer 3φ		82	5151004	E Type Washer 3φ		147	5182960	CS Type Washer 2φ	
-	5182570	P Type Thrust Washer 4.0¢		83	6502760	Link Lever		148	6903190	Spring (3), manual check le	ver
37	6592051	Chucking Arm (1)		84	5151004	E Type Washer 3¢		149	6502780	Manual Check Lever	
38	6592060	Chucking Arm (2)		85 86	6512180 5103543	Reverse Link Arm PT Type Screw M3 x 10		150	5182970	CS Type Washer $8\phi$	
39	5502760	Arm Rubber		87	5120161	P Type Washer 4¢		151	5232440	P Type Felt Washer (1) 8.2	Φ
40	5183000	CS Type Washer 2 ø		88	5151004	E Type Washer 3¢		152	6012440	Select Cam	
41	6012430	Release Cam		89	6592040	Switch Fixing Board		153	6502830	Disk Size Select Arm	
	7062330	Tonearm Driving Board Ass'y		90	6903140	Spring, switch fixing board		154	5100946	PT Type Screw M3 x 12	
		(with 42 ~ 49)		91	5103545	PT Type Screw M3 x 16	•	155	6912560	Balance Weight	
42	5151005	C Type Washer 10φ		92	5162720	PSA Type Screw M3 x 16		156	6502741	Sensor Lever	
43	5106061	SF Type Hex Socket Setscrew	M4 x 6	93	5110241	H Type Nut 3¢		157 158	6502911 5151005	Driving Arm	
44	6012403	Tonearm Driving Board		94	1160250	Micro-Switch		159	5151003	E Type Washer 4φ	
45	6903241	Spring (8), lead-out orin adjus	t plate	95	5182960	CS Type Washer 2¢		160	5232420	E Type Washer 2¢ P Type Nylon Washer 2¢	
46	6502880	Lead-out Adjust Plate		96	6532150	Link Rod (2)		161	6422040	E Trin (Unner)	
47	6502901	Cam Holder		97	6502750	Cam Lever			6422050	E Trip (Under) (SR-535, S	R-5090)
48	6502891	Lead-in Adjust Plate		98	5151004	E Type Washer 3φ			6422060	E Trip (SR-737, SR-7090)	
49	6012462	Adjusting Cam		99	6012370	Manual Cam		162	6002050	Main Gear	
	5182980	W Type Washer 3¢		100	5182960	CS Type Washer 2¢		163	6502860	Release Lever	
50	5101944	BSB Type Screw M3 x 8	· · · · · · · ·	101	5182330	P Type Thrust Washer 4¢		164	5162710	PT Type Screw M4 x 8	
51	7092690	Tonearm Base Ass'y (SR-535)		102	6903210	Spring, start lever		165	4320480	D.D Motor (SR-535, SR-50	90)
	7092770	Tonearm Base Ass'y (SR-5090	•	103	6502790	Start Lever			5320500	D.D Motor (SR-737, SR-70	
	7092700 7092780	Tonearm Base Ass'y (SR-737)		104	5151004	E Type Washer 3¢					
50		Tonearm Base Ass'y (SR-7090	<i>ii</i> ) <i>i</i> 0	105	6502770	Auto Switch Lever					
52	5109122	BT Type Screw M3 x 8 (SR-737, 7090 only)		106	6903090	Spring, auto switch lever					

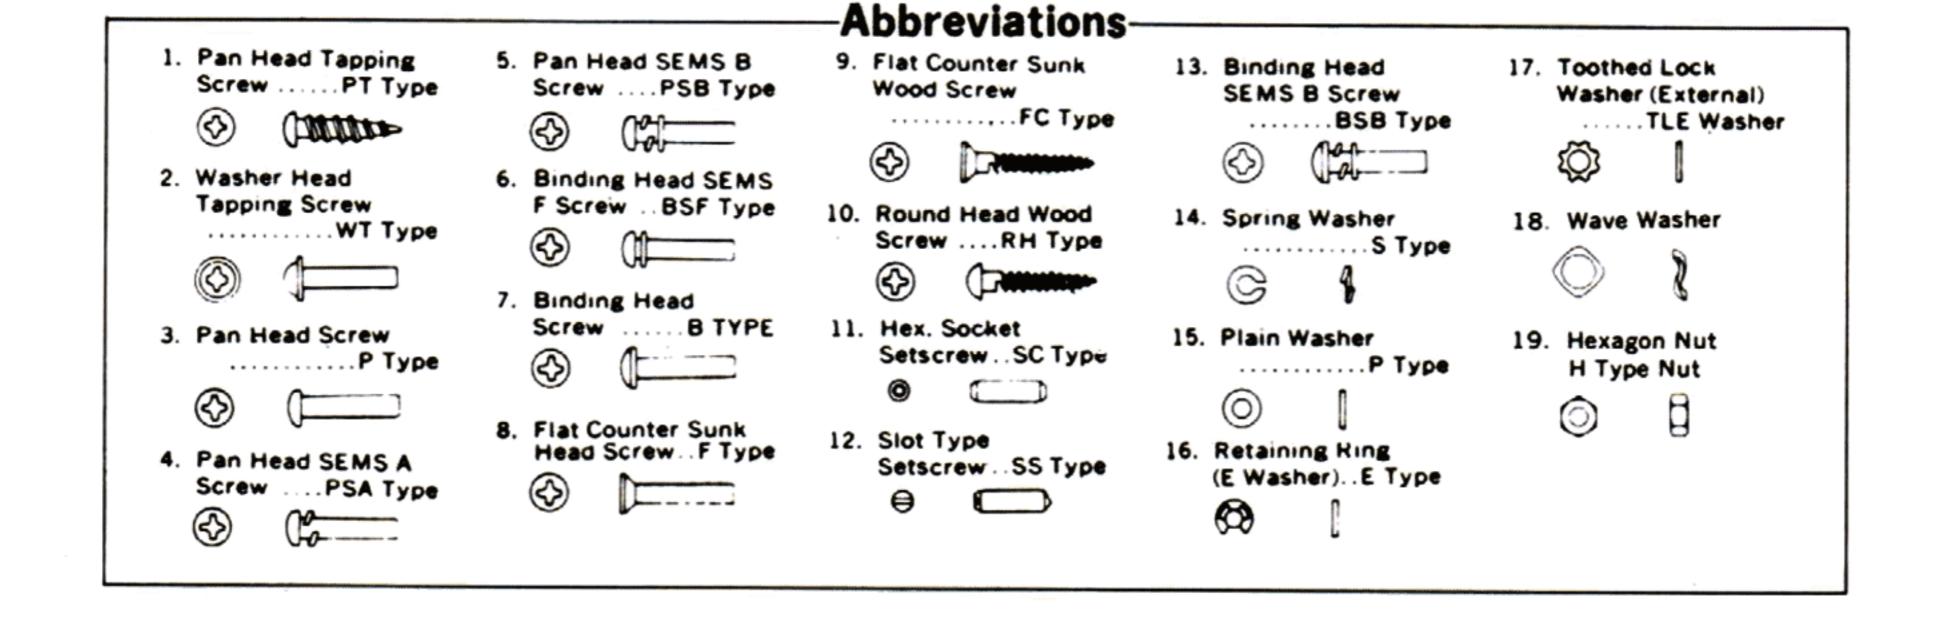


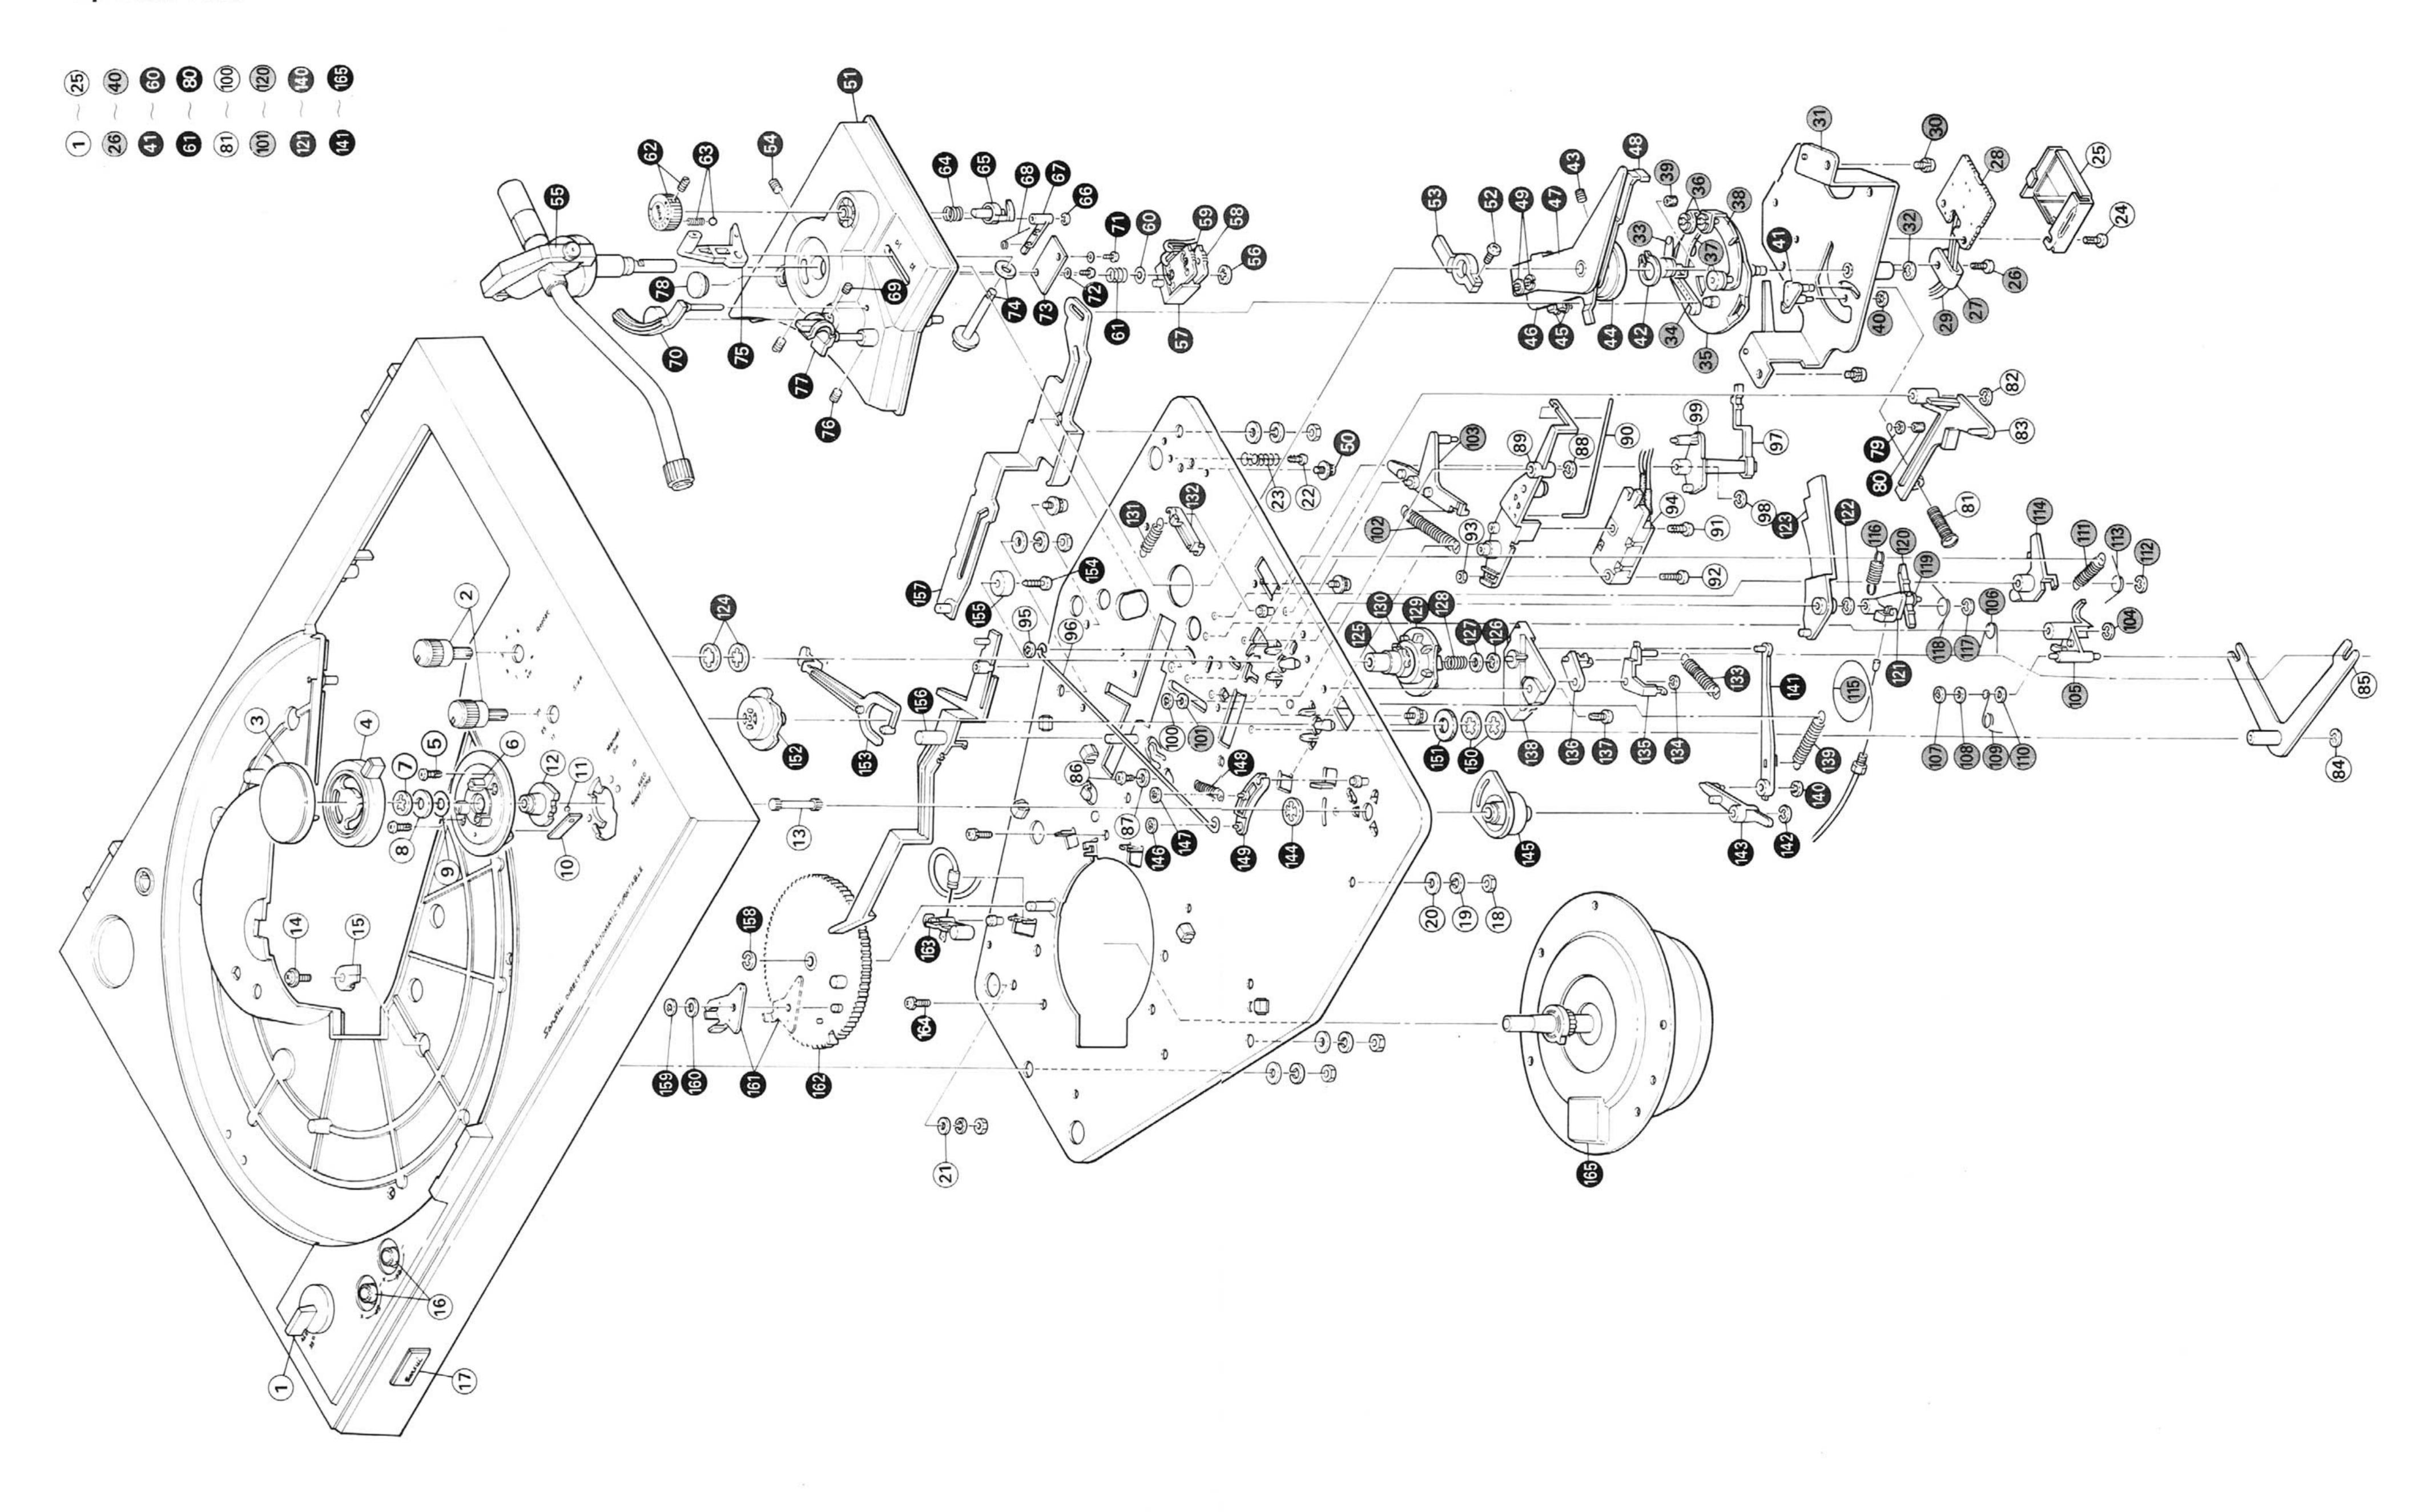

## 6. PARTS LOCATION & PARTS LIST

Since some of capacitors and resistors are omitted from parts lists in this Service Manual, refer to the common parts list for capacitors & resistors which was appended previously to each Sansui Manual.


## 1) S-0013 Motor Control Circuit Board (Stock No. 7595771 SR-737/SR-7090)

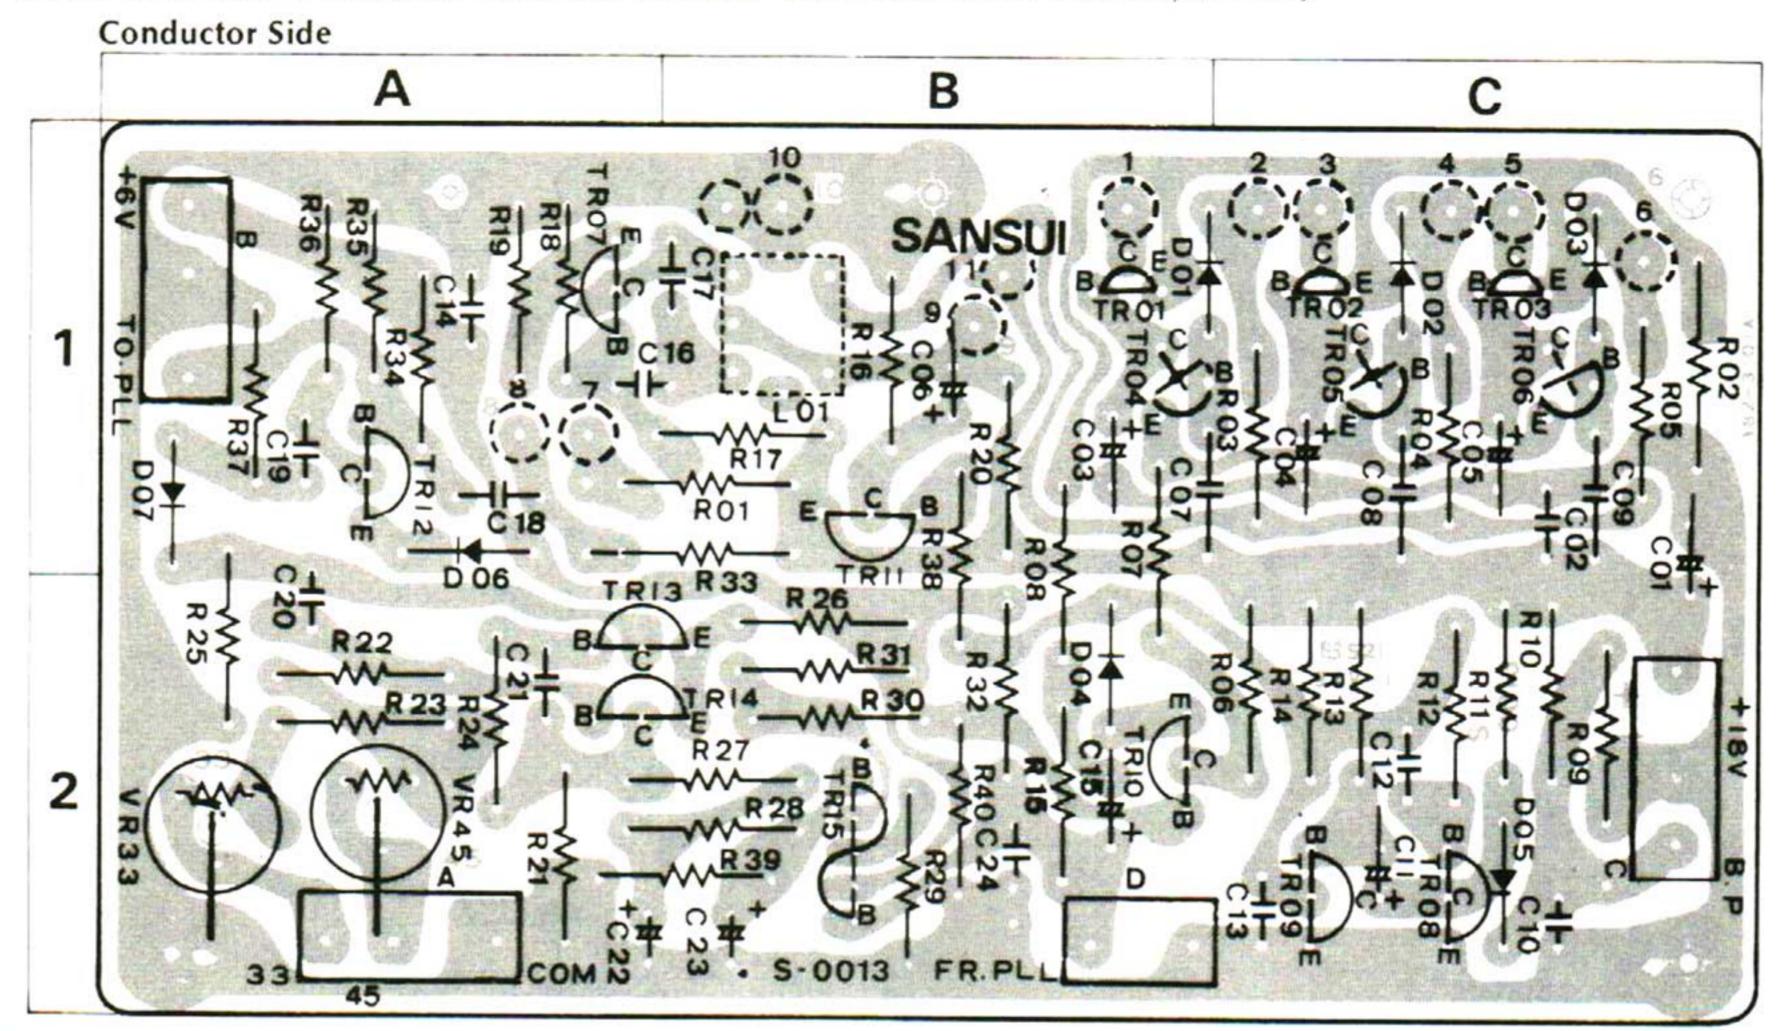

#### Parts List

Parts No.	Stock No.	Description		Position	Part	s No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
TR01 ~03	0308590, 2	2SD471 (M, L, K)		18.1C	C 1	10	0656223	22000pF	2C		0200222	2.2kΩ )	
TR04~06	0300680,1	2SA733 (P. Q)		1B, 1C	C 1	14	0656223	22000 pF 25V C C	1 A	0.01			
TR07~09	0305951~3	3 2SC945 (Q, P, K)		1A, 1C	C 2	20	0625103	10000 pF 50 V P C	2A	R 01	0200332	2.7 kΩ // // // // // // // // // // // // //	
TR 10	0305952	2SC945 (P)	Transistor	28	C 2	24	0656223	22000 pF 25V C.C	28	R 02	0200229	2.2ΩM	1 C
TR11.12	0300680,1	2SA733 (P. Q)		18.1A			0200821	820n )		VR33	1035190	100kΩ (B)	2A
TR13,14	0300680	2SA733 (P)		2A			0200102	1kΩ		VR45	1035190	100kΩ (B)	2A
TR15		2SC1583 (G)		28	R	01	0200122	1.2kΩ / '6W N.I.R.		L 01	4220700	OSC Coil	18
D 01~07	0311050	1S953 Diode		18			0200152	1.5kΩ		LD01	0319140	SR106C L E D	
C 02	0656223	22000pF 25V C C		1 C			0200182	1.8kΩ	18	TR20	0390010	PH101 Transistor	


## 2) S-0014 PLL Servo Circuit Board (Stock No. 7595581) SR-737 (Stock No. 7595981) SR-7090

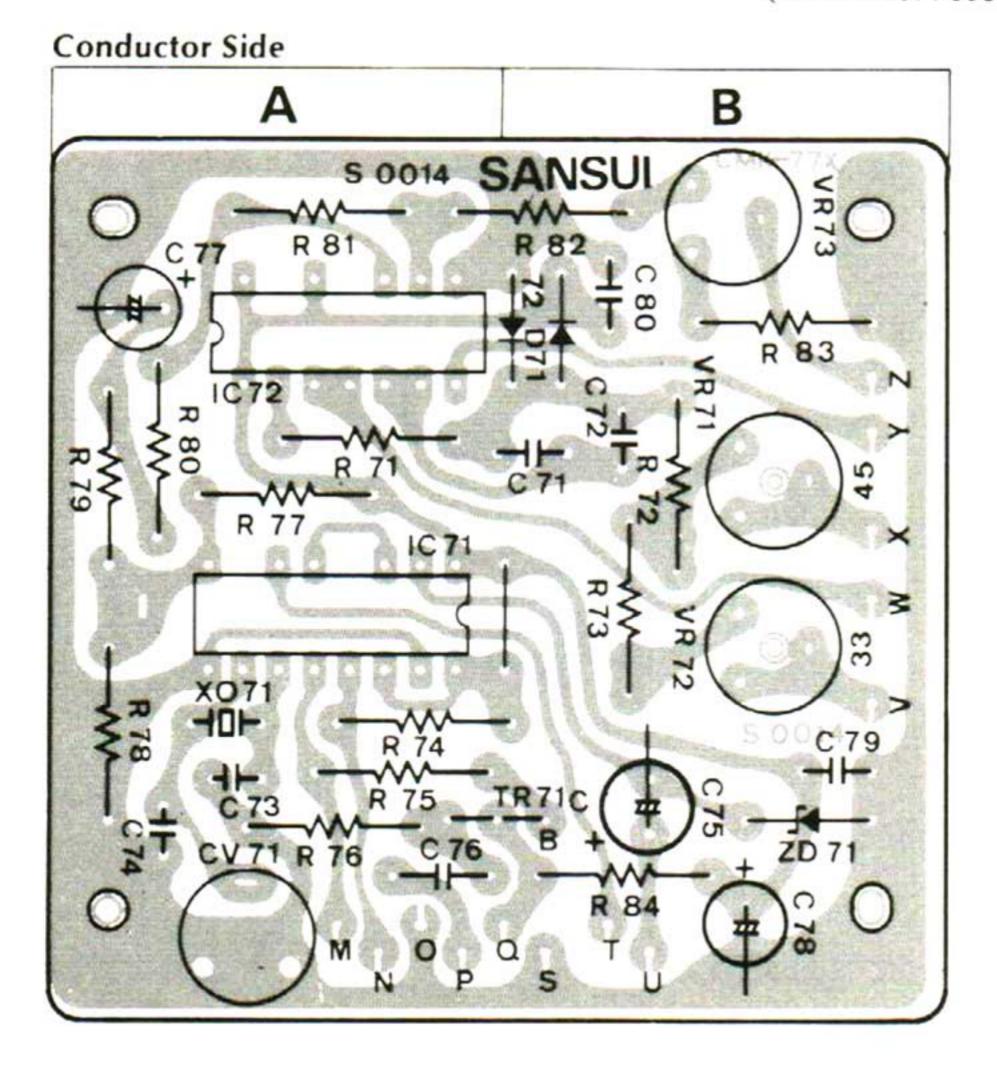

### Parts List

Parts No.	Stock No.	Description	Position
IC 71	0360560	MSM5810 )	A
IC 72	0360570	MSM4069 IC	A
ZD71	0315770	EQA01-065 Zener Diode	В
C 79,80	0657223	22000 pF 50V C.C	В
R 72	0231334	330kΩ ½W M R	
R 73	0231154	150kΩ ½W M.R	
VR71,72	1034360	330 kΩ (B)	В
VR73	1035160	33kΩ (B)	


3) S-0016 Power Supply Circuit Board (Stock No. 7502541 XX, 7502543 EU, 7502544 CSA, 7502548 UL. 7502549 BS) (Stock No. 7502711) SR-7090

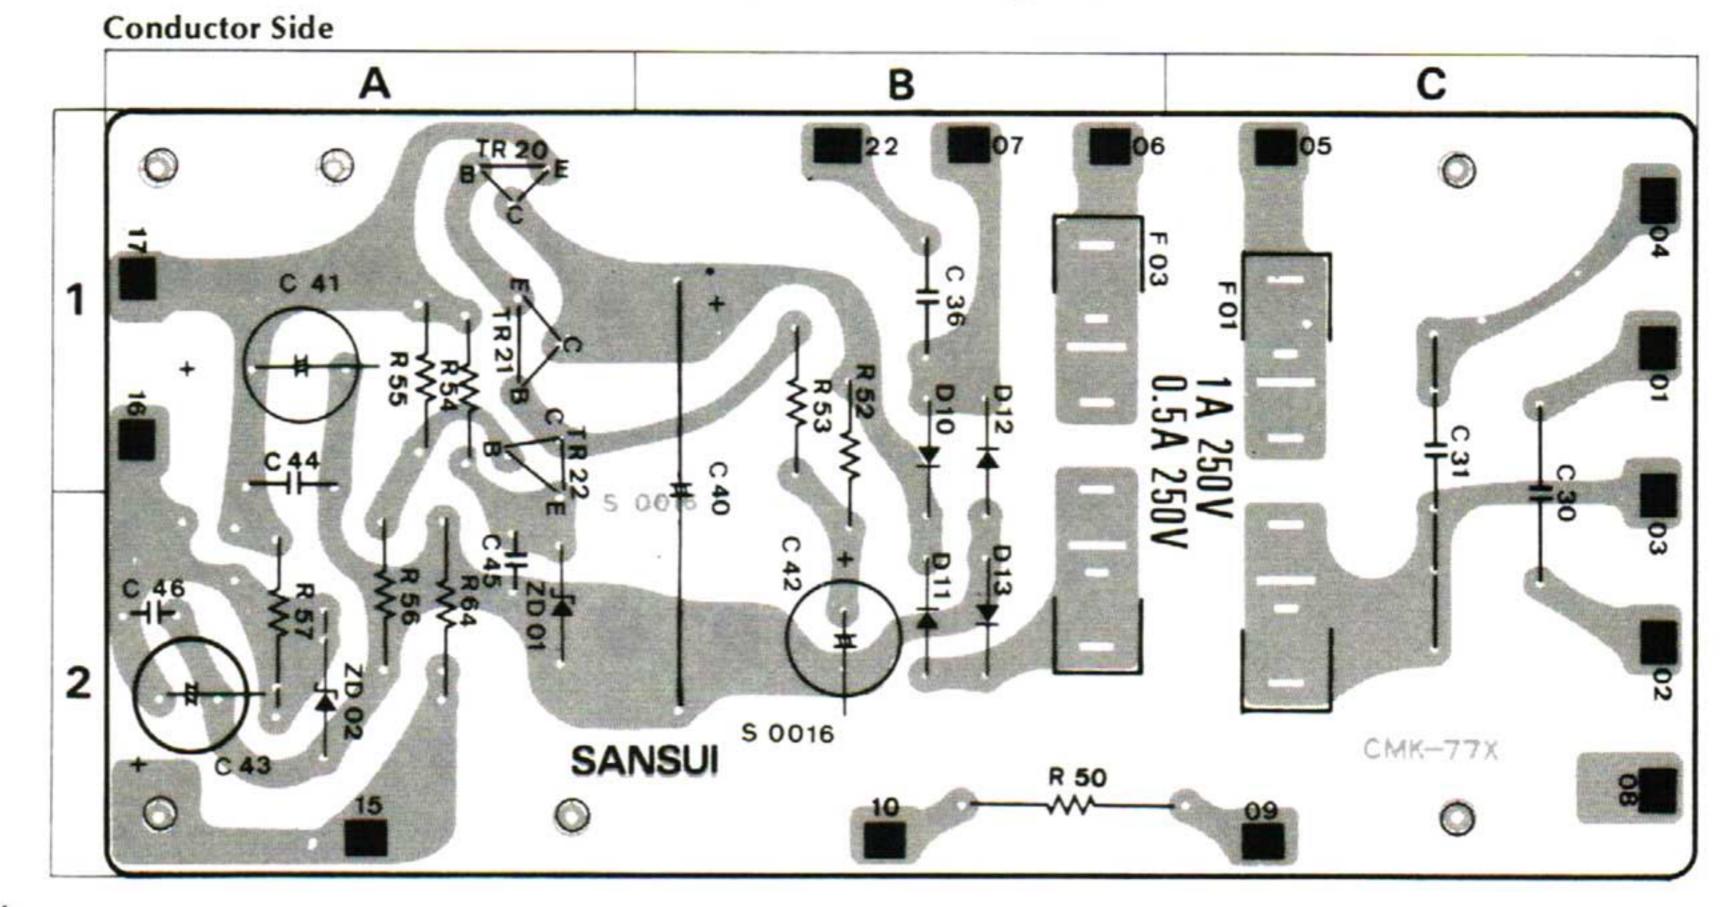

Stock No.	Description	Position	Parts No.	Stock No.	Description	Position	Parts No.	Stock No.	Description	Position
		or 1A		0635337	0.033µF 125V P.C. C.S.A. (SR-737)		F -01	0432210	0.5A 250V AC Fuse XX, C.S.A. UL	1,2C
	7보호 (15) 12:17 12:17 (15) 12:17 (15) 13:17 (15) 13:17 (15) 13:17 (15) 13:17 (15) 13:17 (15) 13:17 (15) 13:17	1A	C 36	0602108	0.1 µF 100V M.C. EU, BS			(0432220	1A 250V AC Fuse XX.	1,2B
0310340	10D1 Diode	1,2B	C 40	0505471	470 µF 50V E.C.	1.2B	F 03	{	C.S.A., UL	2.500
0316630	RD5.1E Zener Diode	2A	C 44	0656473	47000 pF 25V C.C.	1A		0435090	800 mA 250 V AC Fuse EU.	. BS
0315580	EQB01-07 Zener Diode	2A		0211333	33kΩ 1W N.I.R. EU, BS				(SR-737)	
0598337	0.033 µF 250V M.C. EU, BS		R 50	1	(SR-737)	2B		2310220		
0603337	0.033 F 125V M.C. UL			0211123	12kΩ 1W N.I.R. XX,				1. The control of the	
	(SR-737)				C.S.A., UL			2310230		S
0605337	0.033 µF 250 V M.C. XX (SR-737)		R 57	0211391	390Ω 1W N.I.R.	2A				
	0306541 ~ 0306951 ~ 0306070 ~ 0310340 0316630 0315580 0598337 0603337	Stock No.       Description         0306541 ~ 3 2SC1986 (Q, Y, G)       0305951 ~ 3 2SC945 (Q, P, K)       Transisto         0306070 ~ 2 2SC1313 (F, G, H)       0310340       10D1 Diode         0316630       RD5.1E Zener Diode         0315580       EQB01-07 Zener Diode         0598337       0.033 μF 250V M.C. EU, BS         0603337       0.033 μF 125V M.C. UL         (SR-737)       0.033 μF 250V M.C. XX	Stock No.         Description         Position           0306541 ~ 3 2SC1986 (Q, Y, G)         Transistor 1A           0305951 ~ 3 2SC945 (Q, P, K)         Transistor 1A           0306070 ~ 2 2SC1313 (F, G, H)         1A           0310340         10D1 Diode         1, 2B           0316630         RD5.1E Zener Diode         2A           0315580         EQB01-07 Zener Diode         2A           0598337         0.033 μF 250V M.C. EU, BS           0603337         0.033 μF 125V M.C. UL           (SR-737)         0.033 μF 250V M.C. XX	Stock No.         Description         Position         Parts No.           0306541 ~ 3 2SC1986 (Q, Y, G)         0305951 ~ 3 2SC945 (Q, P, K)         Transistor 1A           0306070 ~ 2 2SC1313 (F, G, H)         1A         C 36           0310340         10D1 Diode         1, 2B         C 40           0316630         RD5.1E Zener Diode         2A         C 44           0315580         EQB01-07 Zener Diode         2A         C 44           0598337         0.033 μF 250 V M.C. EU, BS         R 50           0603337         0.033 μF 125 V M.C. UL         (SR-737)           0605337         0.033 μF 250 V M.C. XX         R 57	Stock No.         Description         Position         Parts No.         Stock No.           0306541 ~ 3 2SC1986 (Q, Y, G)         0305951 ~ 3 2SC945 (Q, P, K)         Transistor 1A         0306070 ~ 2 2SC1313 (F, G, H)         1A         C 36         0602108           0310340         10D1 Diode         1, 2B         C 40         0505471           0316630         RD5.1E Zener Diode         2A         C 44         0656473           0315580         EQB01-07 Zener Diode         2A         ∫ 0211333           0598337         0.033 μF 250 V M.C. EU, BS         R 50         ∫ 0211123           0605337         0.033 μF 250 V M.C. UL         R 57         0211391	Stock No.   Description   Position   Parts No.   Stock No.   Description	Stock No.   Description   Position   Parts No.   Stock No.   Description   Position	Stock No.   Description   Position   Parts No.   Stock No.   Description   Position   Parts No.	Stock No.   Description   Position   Position   Parts No.   Stock No.   Description   Position   Parts No.   Stock No.	Stock No.   Description   Position   Posi

## S-0020 Sensor Amplifier Circuit Board (Stock No. 7595561) SR-737 (Stock No. 7595971) SR-7090

### **Conductor Side**

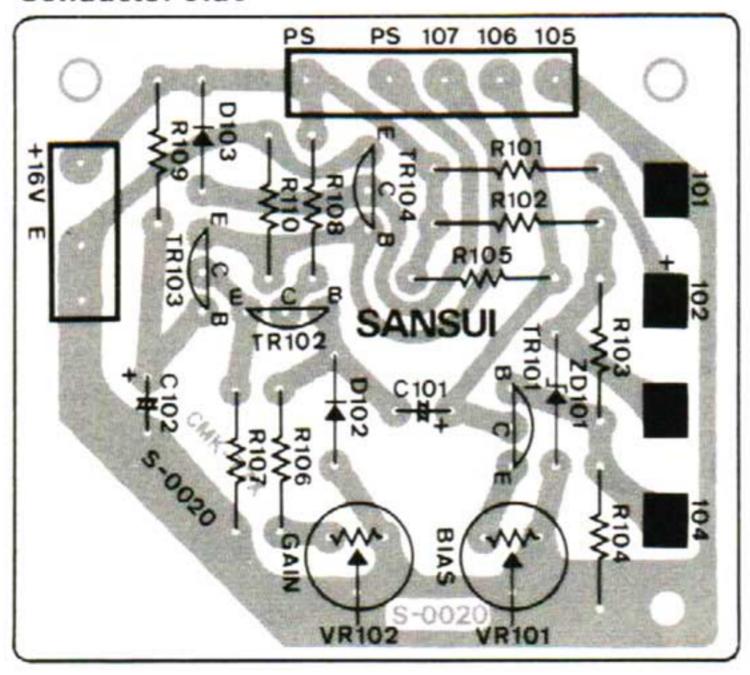


### Parts List

Parts No.	Stock No.	Description
TR101 ~ 103	0305951,2	2SC945 Q. P _
TR.104	0308591,2	2SD471 L. K Transistor
D 102	0311050	1\$953
D 103	0310340	10D1 (1S2226) Diode
ZD101	0316250	RD-10E B Zener Diode
C 101	0573100	35V 10µF
R101~102	0103681	680Ω %W
VR101	1035040	330Ω (B)
VR102	1035200	150kΩ (B)
	2410570	5P Pin Ass'y Type D
	2410580	3P Pin Ass'y Type D

### 5) S-0018 L E D Circuit Board

(Stock No. 7595621/SR-737) (Stock No. 7595961/SR7090)

Conductor Side

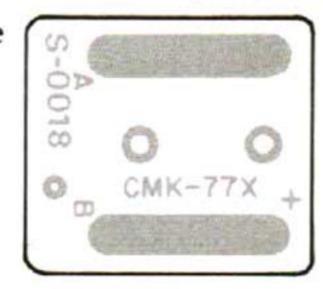


### **Parts List**

Parts No.	Stock No.	Description
LD01	0319140	SR-106C LED

### 6) S-0019 C D S Circuit Board

(Stock No. 7595601/SR-737) (Stock No. 7595951/SS-7090)

**Conductor Side** 

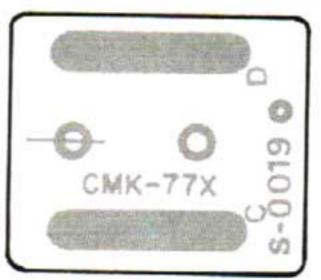


### **Parts List**

Parts No.	Stock No.	Description	
CD01	0920070	P380-05 cds 25 ~ 60 kΩ	cds

### 7) V.G Servo Circuit Board (SR-535/SR-5090)

Note: Complete V.G Servo printed circuit board will not be supplied due to an assembly board with D.D motor. When necessary, order D.D motor (Stock No. 4320480) which contains complete V.G Servo printed circuit board. But, individual parts on V.G Servo printed circuit board will be supplied to your order.

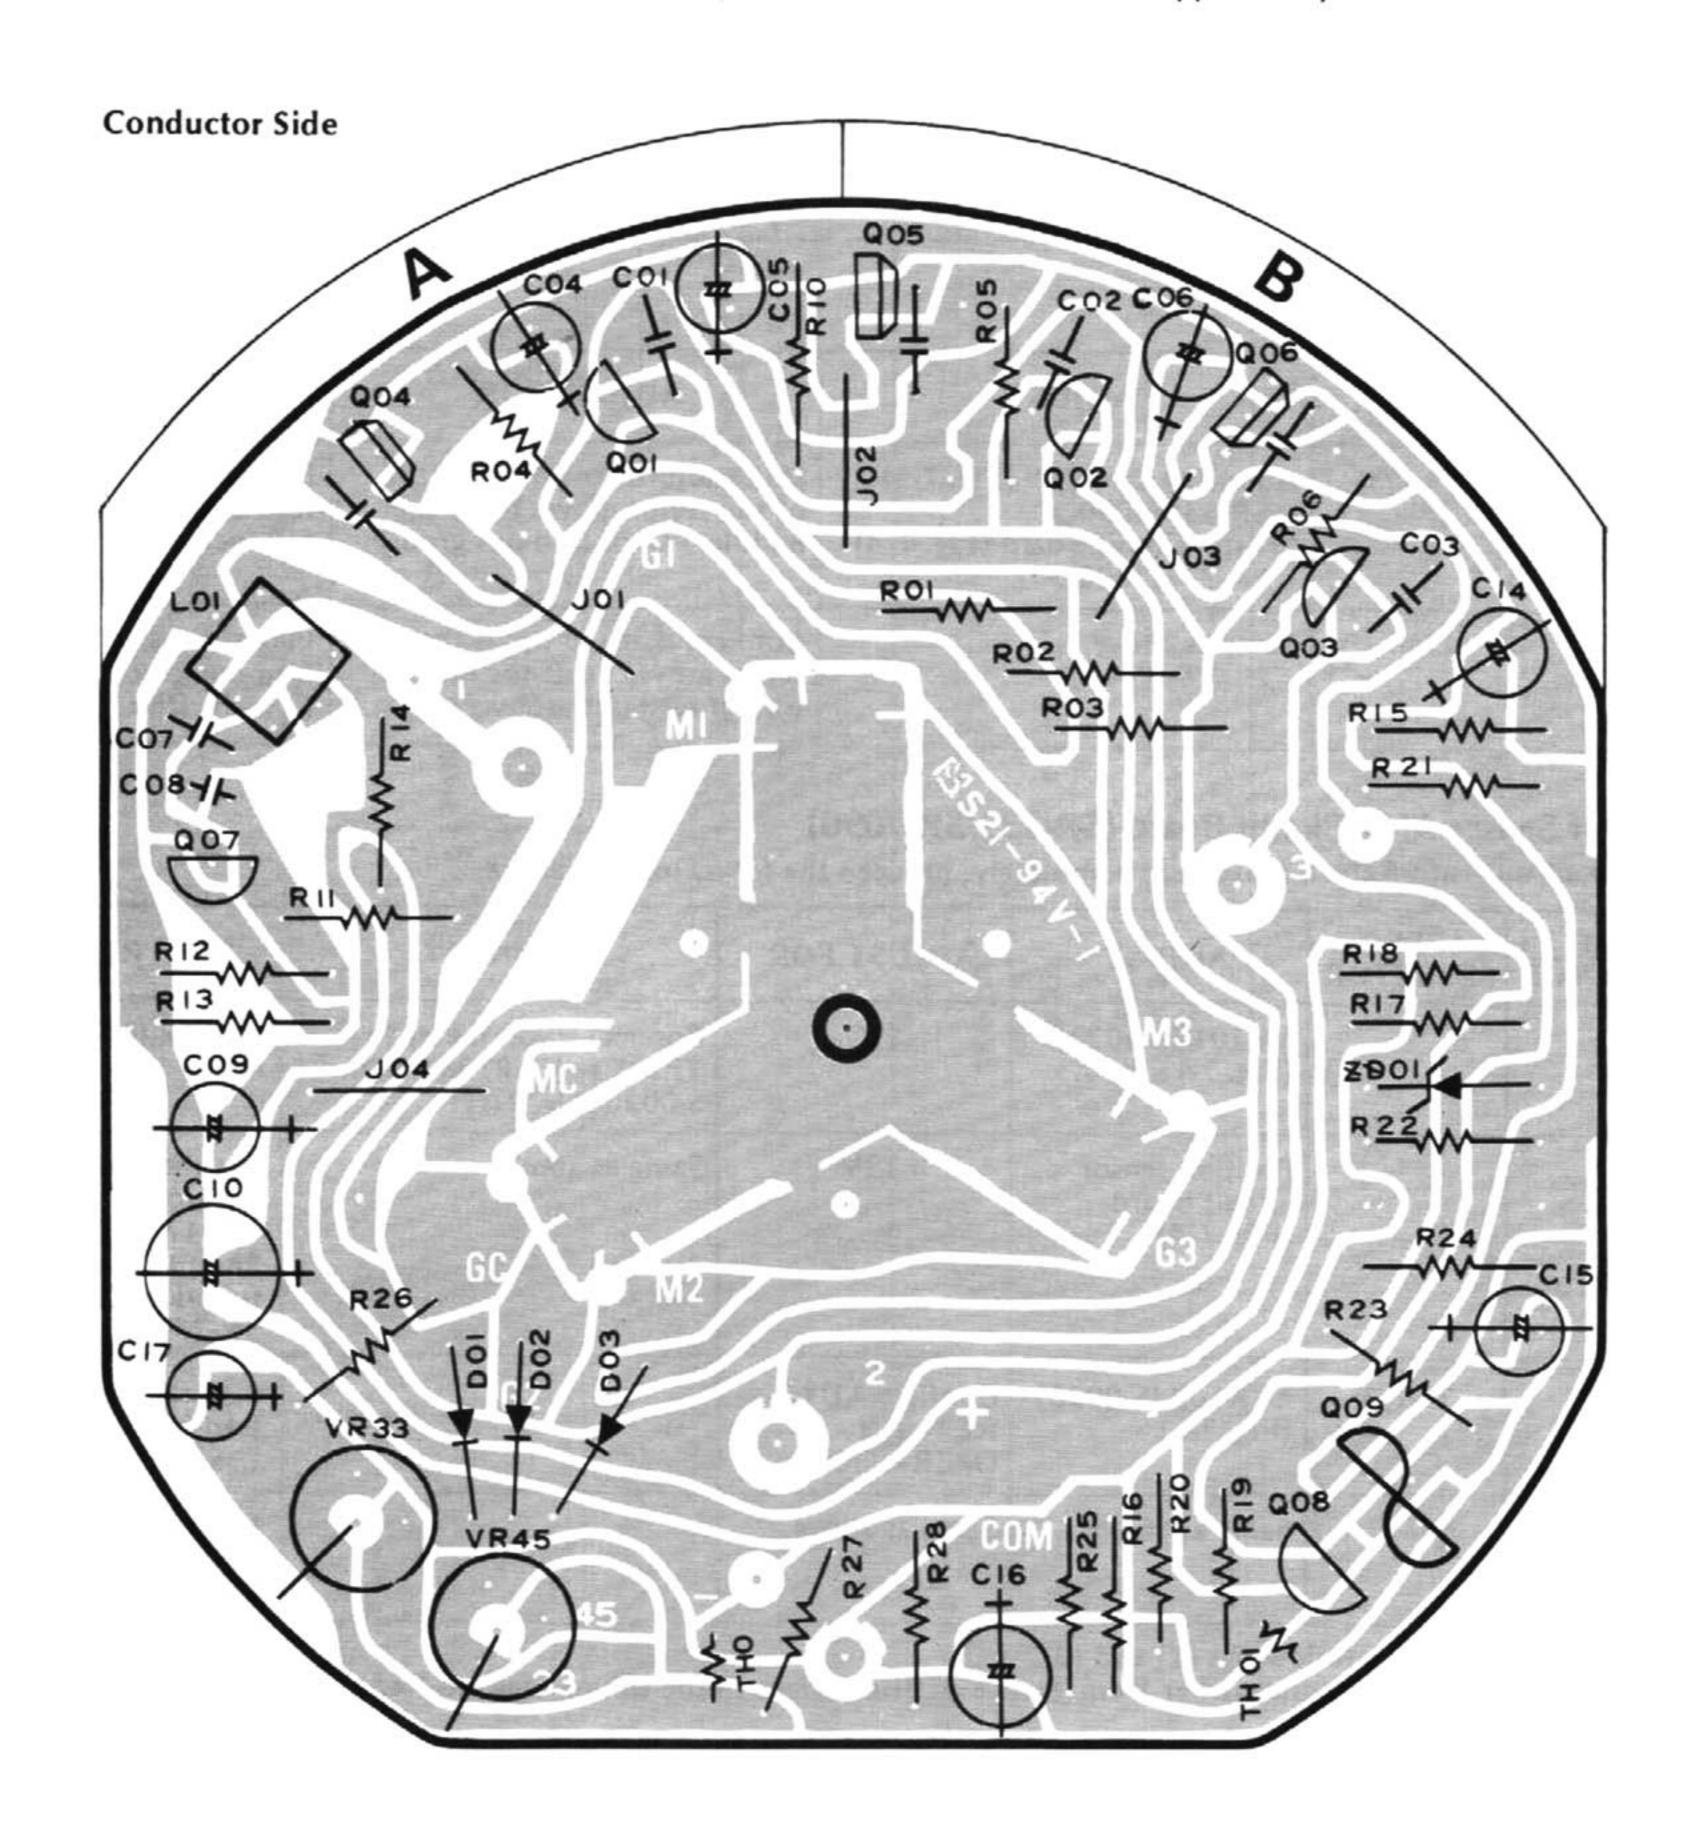

### Parts List


Pa	rts No.	Stock No.	Description	Position
Q	01 ~ 03	0300680,1	2SA733 (P, Q)	A, B
Q	04~06	0308590,1,2	2SD471 (M.L.K) Transistor	A.B
			3 2SC945 (Q.P.K))	A, B
	09		2SA798 (G.H) Dual Transisto	rB
ZC	001	0316630	RD5.1E Zener Diode	В
D	01~03	0311180	1S1588 Diode	A

Pa	rts No.	Stock No.	Description	Position
TH	101,02	0320140	SDT-100 Thermistor	
C	01~03	0656473	0.047 µF 25V C.C.	A.B
C	07	0601107	0.01 µF 50V M.C	A
C	08	0601226	0.0022µF 50V M.C	A
R	10	0200229	2.2Ω ½W N.I.R.	A
R	20	0240911	910Ω ¼W C.R	

Parts No.		Stock No.	Description	Position
R	25	0240912	9.1kΩ ¼W C.R.	
L	01	4220700	Oscillator Coil	
		2420480	Connector	
		2230170	Chip Terminal	

#### Abbreviations C.R. : Carbon Resistor N.I.R. : Non-Inflammable C.C. : Ceramic Capacitor S.R. : Solid Resistor Resistor Mi.C. : Mica Capacitor Ce.R. : Cement Resistor M.C. : Mylar Capacitor O.C. : Oil Capacitor M.R. : Metal Film E.C. : Electrolytic Capacitor P.C. : Polystyrene Capacitor BP. E.C.: Bi-Polar Electrolytic Resistor T.C. : Tantalum Capacitor F.R. : Fusing Resistor Capacitor


# 8) S-0015 Power Supply Circuit Board (Stock No. 7502521 XX, 7502523 EU, 7502524 CSA, 7502528 UL, 7502529 BS/SR-535) (Stock No. 7502721/SR-5090)

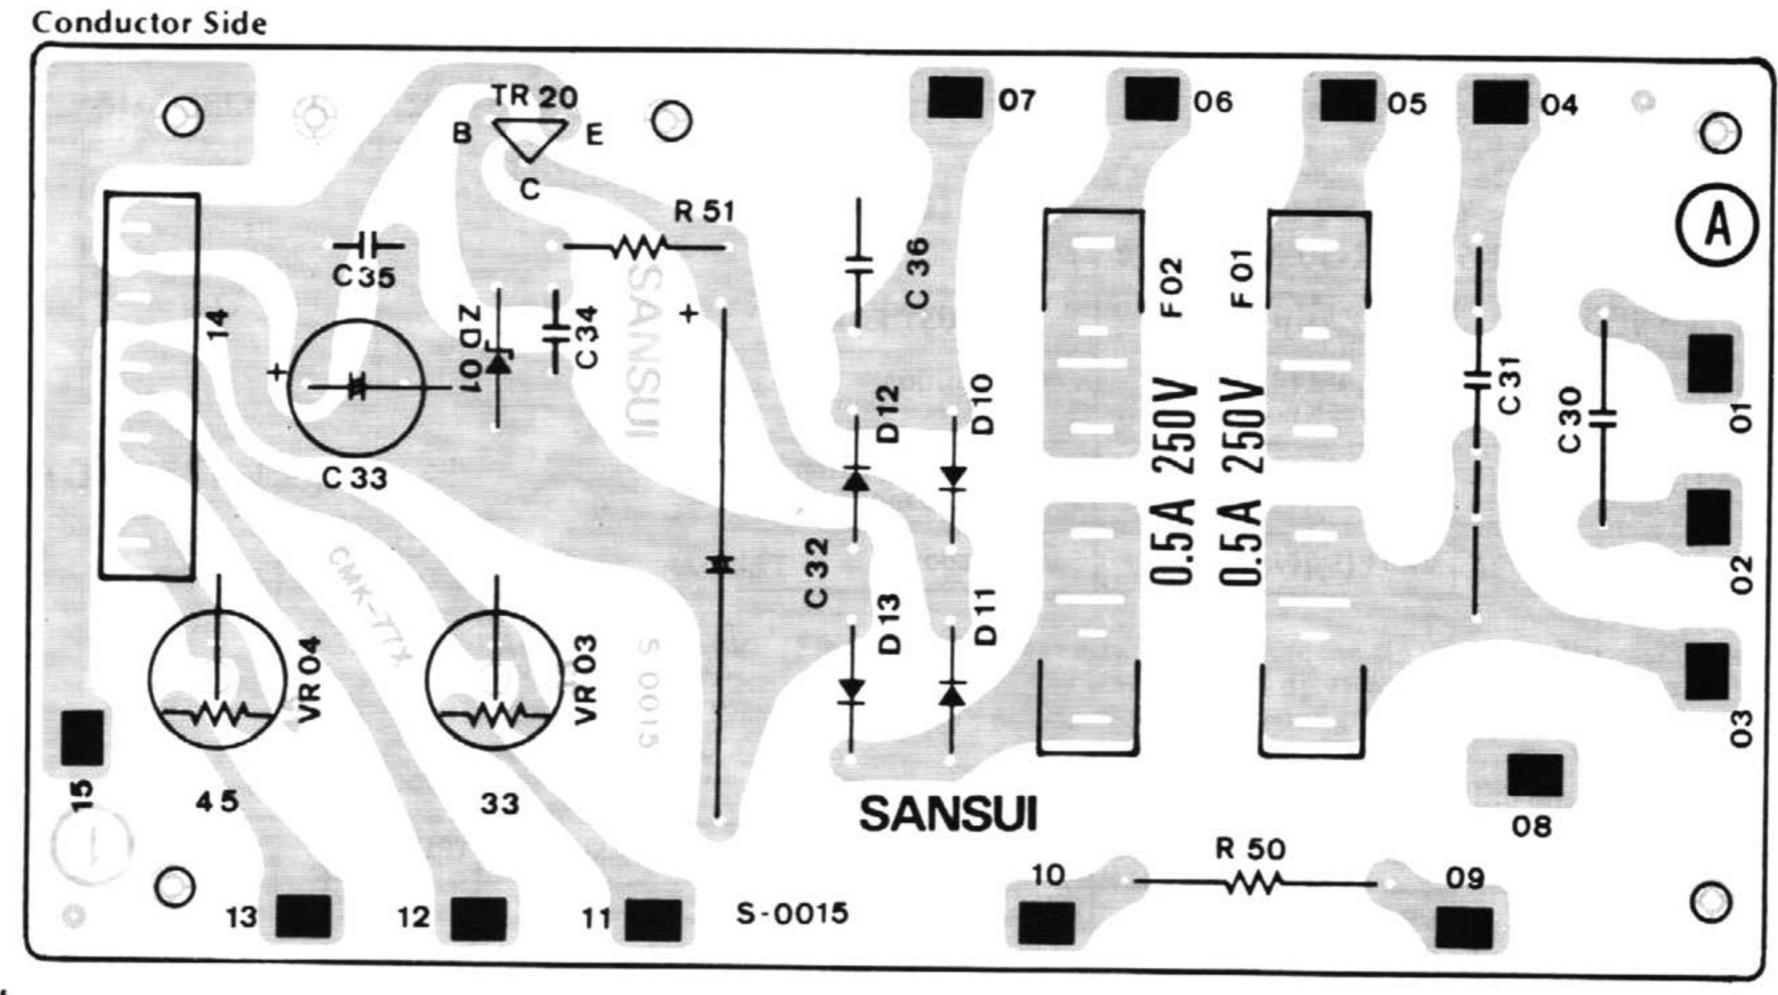

#### Parte List

arts No.	Stock No.	Description	Parts No.	Stock No.	Description	Parts No.	Stock No.	Description
R 20		3 2SD313 (D, E, F) Transistor	C 34	0656473	47,000 pF 25V C.C.	F 01.02	0432210	AC Fuse 0.5A 250V
	0310340	10D1 (1S2226) Diode	C 36	0602108	0.1 µF 100V M.C.			UL, C.S.A., XX
30,31	0315380 0598337	RD-19AM Zener Diode 0.033 µF 250V M.C. EU, BS	R 50	0211123	12kΩ 1W N.I.L. UL, C.S.A., XX	F 02	0435060	Time-Lag Fuse 400 mA 250V
31	0603337 0635337	0.033 µF 125V M.C. UL 0.033 µF 125V P.C. C.S.A.		0211333	33kΩ 1W N.I.L. BS, EU		2310220	Fuse Holder (Large) XX, C.S.A., UL
32	0605337 0505331	0.033 µF 250 V M.C. XX 330 µF 50 V E.C.	VR03,04	1035130	$10k\Omega$ (B), Semi-variable Resistor		2410570	5P Pin Ass'y Type D

9) S-0012 Circuit Board for connections between P.U output cord & color wires from cartridge (Stock No. 2593661 SR-535/SR-5090/SR-737/SR-7090)

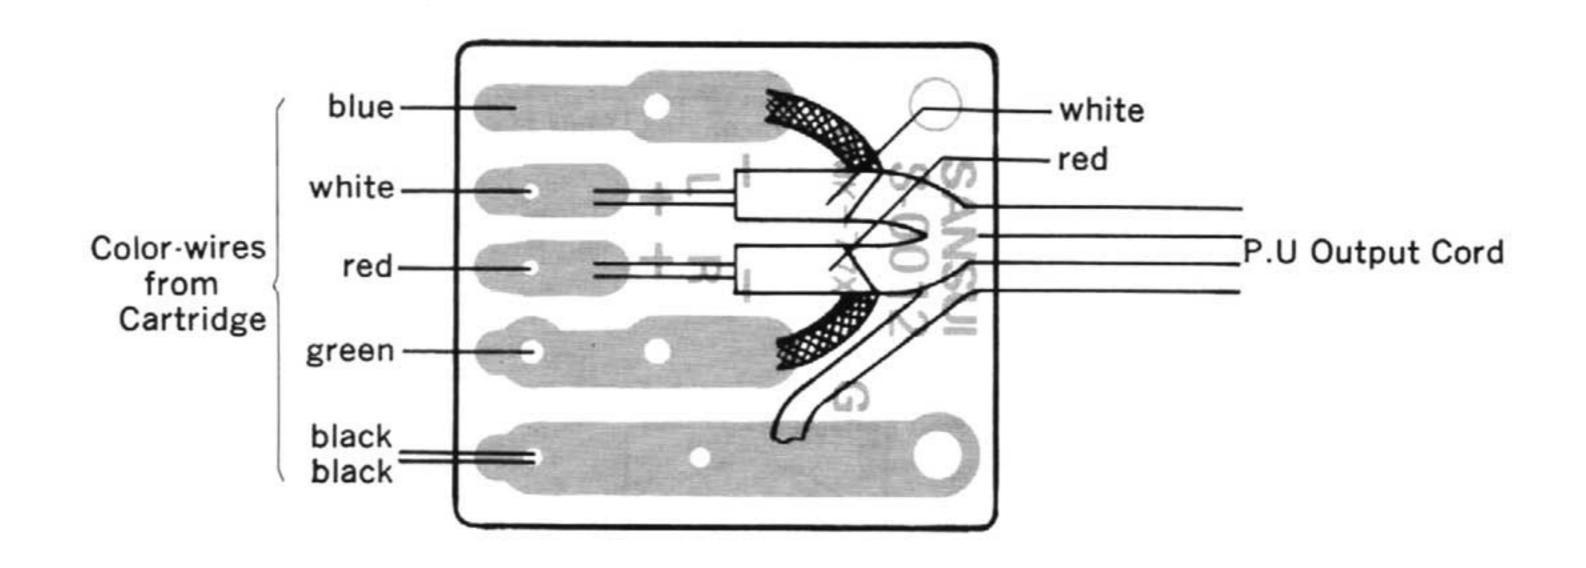

#### NOTE:

AS to U.L., C.S.A., B.S., ES and XX marked in the Parts Lists, note the followings:

U.L., C.S.A. . . Approved parts used in the unit which is applicable to the U.S. and Canada under safety standard.

B.S. . . . . . . Approved parts used in the unit which is applicable to British under safety requirement.

E.U. . . . . . Approved parts used in the unit which is applicable to Sweeden, Denmark, Norway, Finland, West

Germany, and Switzerland under safety requirement.

XX . . . . . . . Parts used in the unit which is applicable to other countries excepting mentioned above.

<sup>\*</sup> Parts unspecified such as CSA, UL, EU & XX in "Description" are common parts.

## 7. ADJUSTMENTS

## 1. Speed adj

### 1) SR-535/SR-5090


(See Bottom View SR-535/SR-5090 on page 7)

STEP	SPEED SELECTOR	ADJUST	ADJUST FOR
1	33-1/3	VR13, VR14 (Control Knob on Panel)	Center position.
2	33-1/3	VR03 (S-0015)	Strobo marking pattern appears to stand still.
3	45	VR04 (S-0015)	Same as above.

### 2) SR-737/SR-7090

For adjustment, set the unit horizontally and attach the turntable platter.

STEP	SPEED SELECTOR	ADJUST	ADJUST FOR	MEASURE OUTPUT	REMARKS
1	33-1/3	VR733, VR745 (Control Knob on panel)	Center position		
2	33-1/3	VR73 (S-0014)	1.25V	Connect a volt meter $(20 \text{ k}\Omega/\text{V})$ to D terminal on S-0013 (Fig. 7-1)	Make short between TP Pin (S-0014) & chassis. (Fig. 7-1) After adjustment, disconnect the volt meter $(20  k\Omega/V)$
3	33-1/3	VR33 (S-0013)	Strobo marking pattern appears to stand still.		Same as above.
4	45	VR45 (S-0013)	Same as above.		Same as above. After this adjustment, disconnect the shorting lead between TP Pin & chassis.
5	33-1/3	VR73 (S-0014)	1.25V	Connect a volt meter (20 kΩ/V) to D terminal on S-0013 (Fig. 7-1)	Stop the rotation of turntable pressing down the platter. After adjustment, disconnect the volt meter $(20 \text{ k}\Omega/\text{V})$
6	33-1/3	VR72 (S-0014)	Strobo marking pattern appears to stand still.	Connect oscilloscope as Fig. 7-1.	
7	33-1/3	VR33 (S-0013)	Set the waveform on oscilloscope to adjusted one as Fig. 7-2.	Same as above.	
8	45	VR71 (S-0014)	Strobo marking pattern appears to stand still.	Same as above.	
9	45	VR45 (S-0013)	Set the waveform on oscilloscope to adjusted one as Fig. 7-2.	Same as above.	

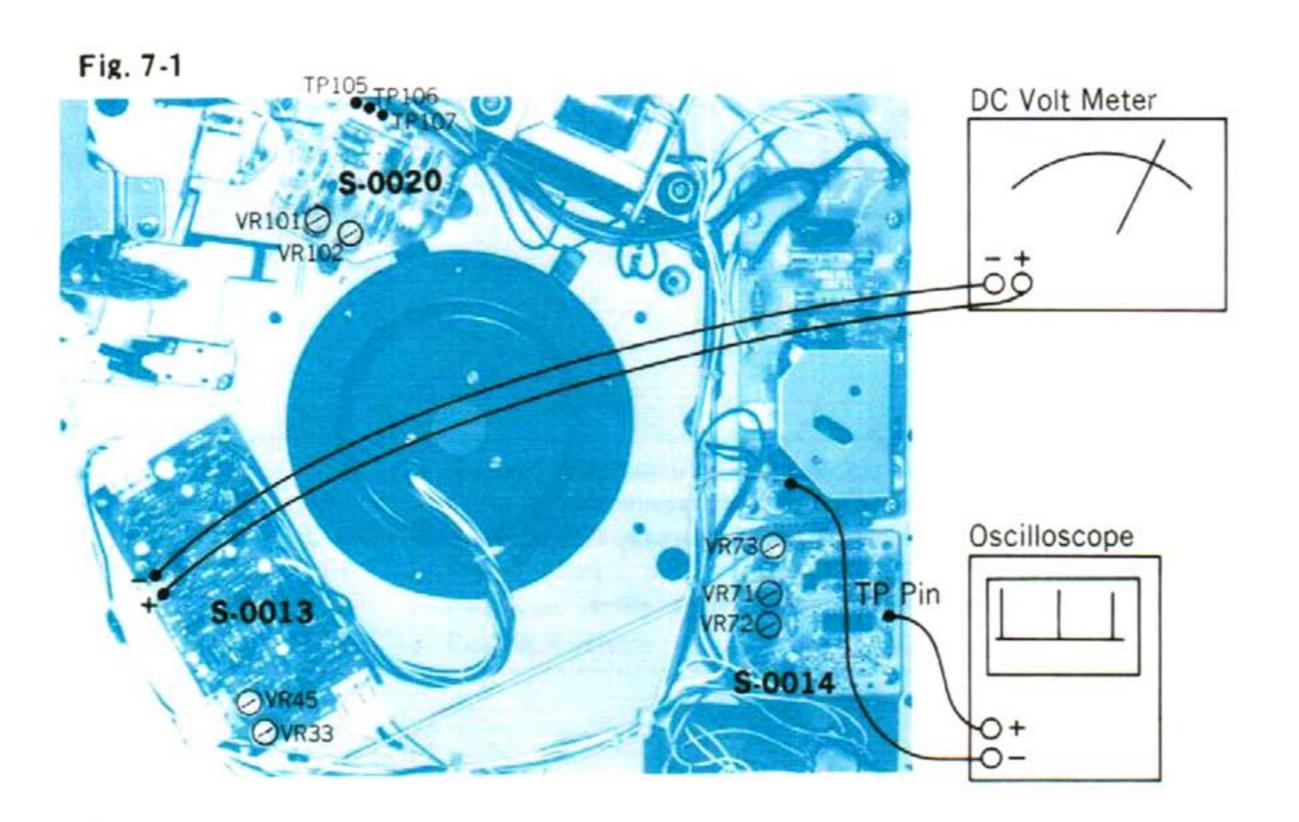

Correct Speed Faster or Slower

Waveform on oscilloscope

### 2. Adjustments of AUTO-IN and AUTO-RETURN

### 1) AUTO-IN adj.

STEP	SIZE SELECTOR	SPEED SELECTOR	ADJUST	ADJUST FOR	REMARKS
1	30	33-1/3	Adjusting cam "A" (Fig. 7-3)	Make adjustment that the tip of the stylus touches the middle way of the lead-in groove.	Play the disk that has short lead-in groove. Use 30 cm (12 inch) Disk.
2	17	45	Same as above.	Confirm that the tip of the stylus touches the middle way of the lead-in groove.	Play the disk that has short lead-in groove. Use 17 cm (7 inch) Disk.

### 2) AUTO-RETURN adj.

STEP	SIZE SELECTOR	SPEED SELECTOR	ADJUST	ADJUST FOR	REMARKS
1	30	33-1/3	Adjusting cam "B" (Fig. 7-3) <sr-535 5090=""> Sensor Circuit Board (Fig. 7-4) <sr-737 7090=""></sr-737></sr-535>	Make adjustment that the tip of the stylus moves up at the middle way of lead-out groove.	Play the disk that has short lead-out groove. Use 30 cm (12 inch) Disk.
2	17	45	Same as above.	Confirm that the tip of the stylus moves up at the middle way of lead-out groove.	Play the disk that has short lead-out groove. Use 17 cm (7 inch) Disk.

### 3) Adjustment of Sensor AMP Circuit Board (SR-737/SR-7090)

Note: If unable to adjust Auto-Return movement completely, proceed the following procedure.

STEP	SIZE SELECTOR	SPEED SELECTOR	ADJUST	ADJUST FOR	CONNECT	REMARKS
1			VR101 (S-0020) (Fig. 7-1)	1 V	Connect a volt meter to TP105 (-), TP106 (+) on S-0020 (Fig. 7-1)	Put the tone arm on the arm rest.
2			Position sensor circuit board (Fig. 7-4)	13V	Same as above.	Put the stylus on the finishing groove of disk. Use 17 cm (7 inch) Disk. Shim the plunger not to function. (See Bottom View SR-737/SR-7090 on page 7)
3	30	33-1/3	*VR102 (S-0020) (Fig. 7-1)	Confirm AUTO- RETURN OPERATION		Play the disk that has short lead-out groove. Use 30 cm (12 inch) Disk.
4	17	45	Same as above.	Same as above.		Play the disk that has short lead-out groove. Use 17 cm (7 inch) Disk.

Do not turn VR102 except the followings (1) and (2).

Fig. 7-3

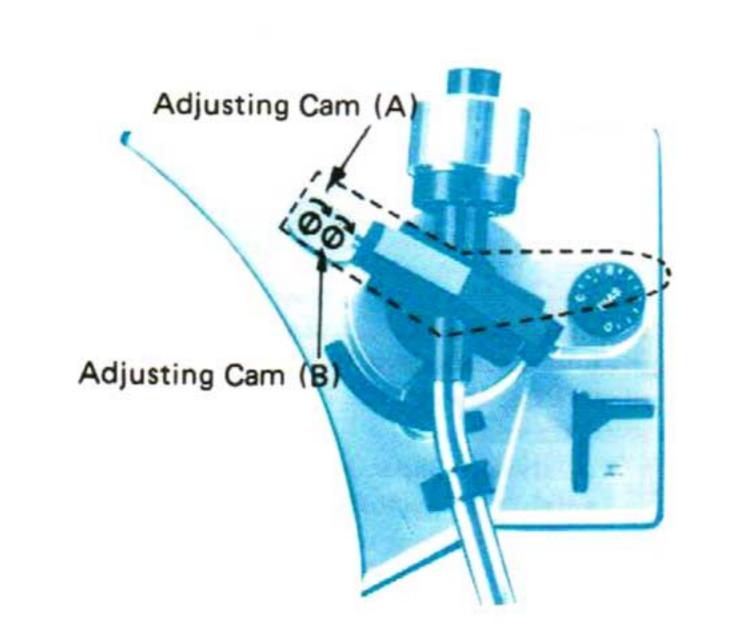


Fig. 7-4



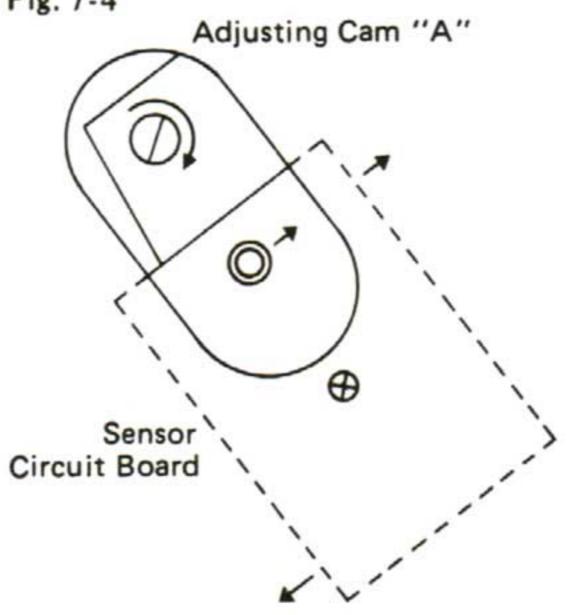


Fig. 7-5

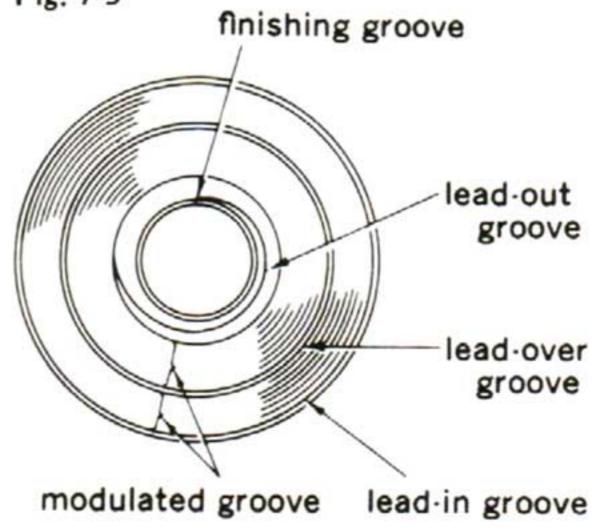

<sup>(1)</sup> If stylus tip would move up too earlier from groove of disk surface in the timing of Auto-Return movement, turn VR102 counterclockwise.

If stylus tip would not move up even in finishing groove of disk surface, turn VR102 clockwise.

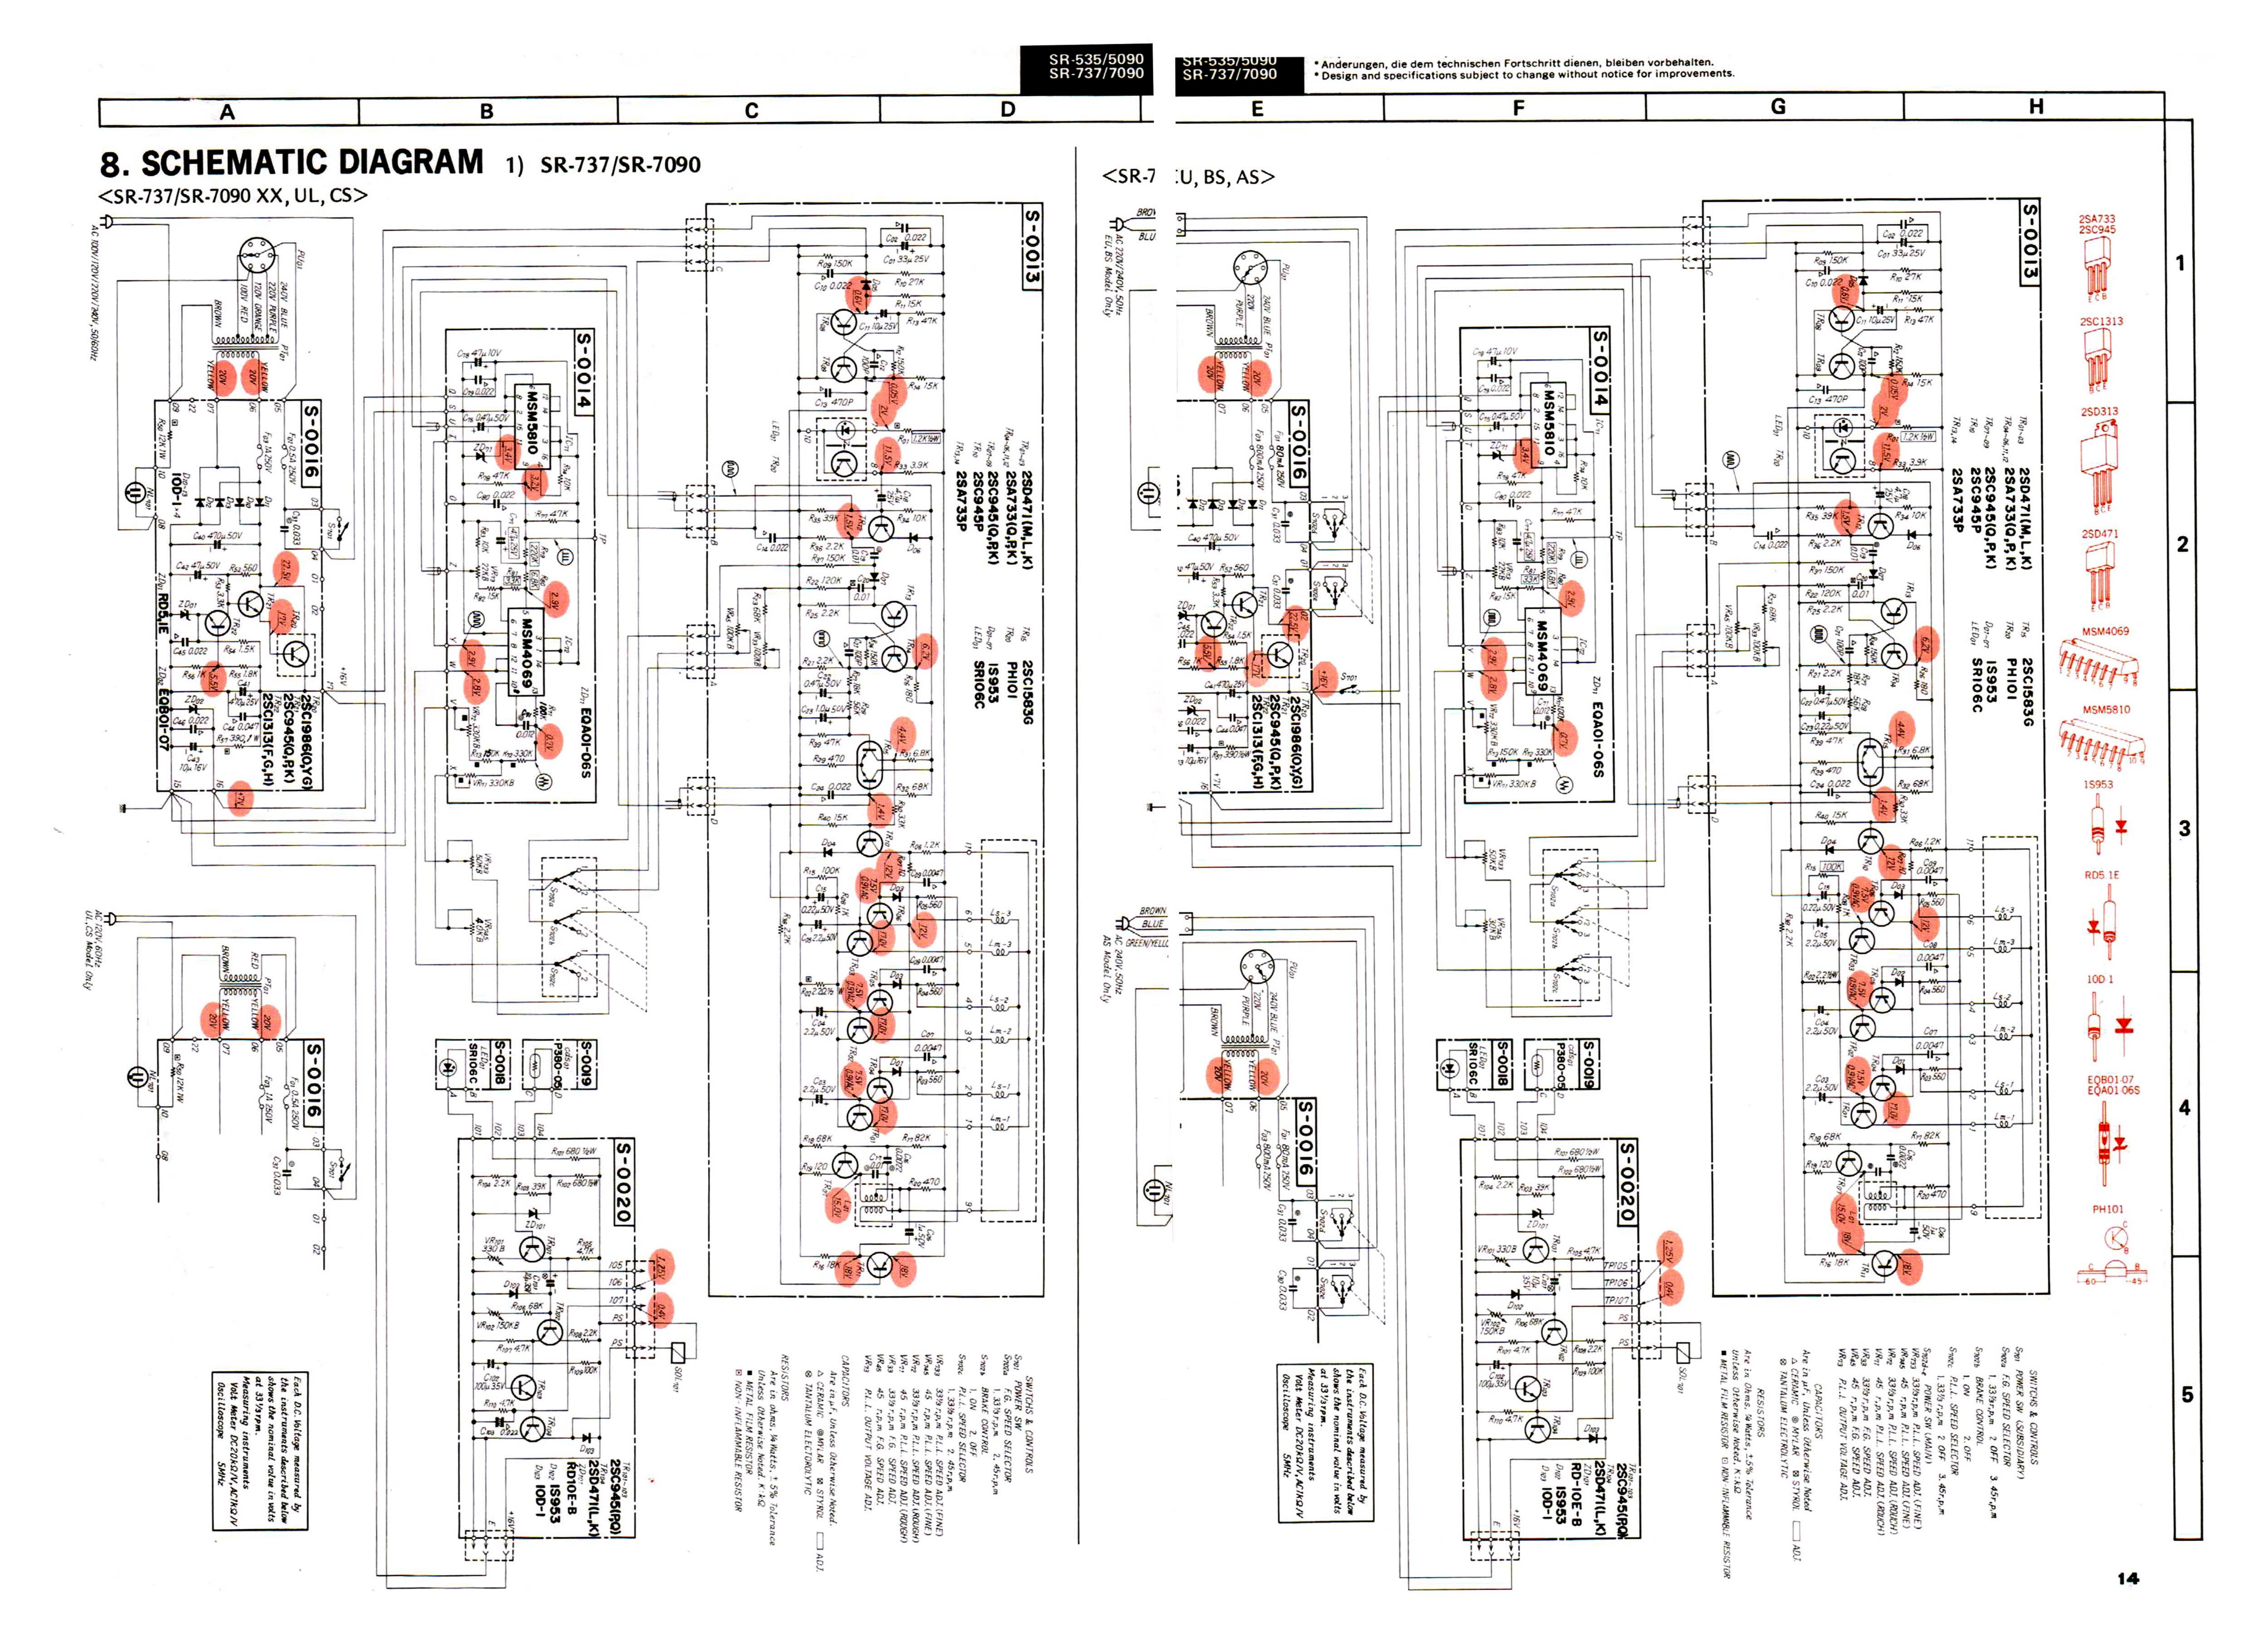


## 9. PACKING LIST

## 10. ACCESSORY PARTS LIST

Parts No.	Stock No.	Description	
1	9012310	Upper Sheet	
2	7012161	Dust Cover Ass'y	
3	9122110	Polyethylene Sheet	
4	9012270	Protector Sheet, turntable	
5	5502901	Rubber Mat. XX, UL )	
		(SR-5090, SR-7090) \ SR-535,	
	5502891	Rubber Mat. SR-737	
		EU, CSA, BS	
6	6112183	Turntable (Platter)	
		(SR-535, SR-5090)	
	6112191	Turntable (Platter)	
		(SR-737, SR-7090)	
7	9116600	Polyethylene Bag, turntable	
8	9112250	Polyethylene Bag,	
		turntable unit	
9	9082071	Stylofoam Packing, front	
10	9082081	Stylofoam Packing, back	
11	9022630	Accessories Package	
12	9082110	Plastic Cover Sheet	
13	9002650	Carton Case (SR-535)	
	9002730	Carton Case (SR-5090)	
	9002670	Carton Case (SR-737)	
	9002740	Carton Case (SR-7090)	
14	5996080	Curl Stopper	

Stock No.	Description
9203070	Operating Instruction (SR-535)
9203080	Operating Instruction (SR-5090)
9203090	Operating Instruction (SR-737)
9203100	Operating Instruction (SR-7090)
9232160	Schematic Diagram XX (SR-535)
9232190	Schematic Diagram (SR-5090)
9232170	Schematic Diagram XX (SR-737)
9232200	Schematic Diagram (SR-7090)
5242590	Cartridge Mounting Gauge

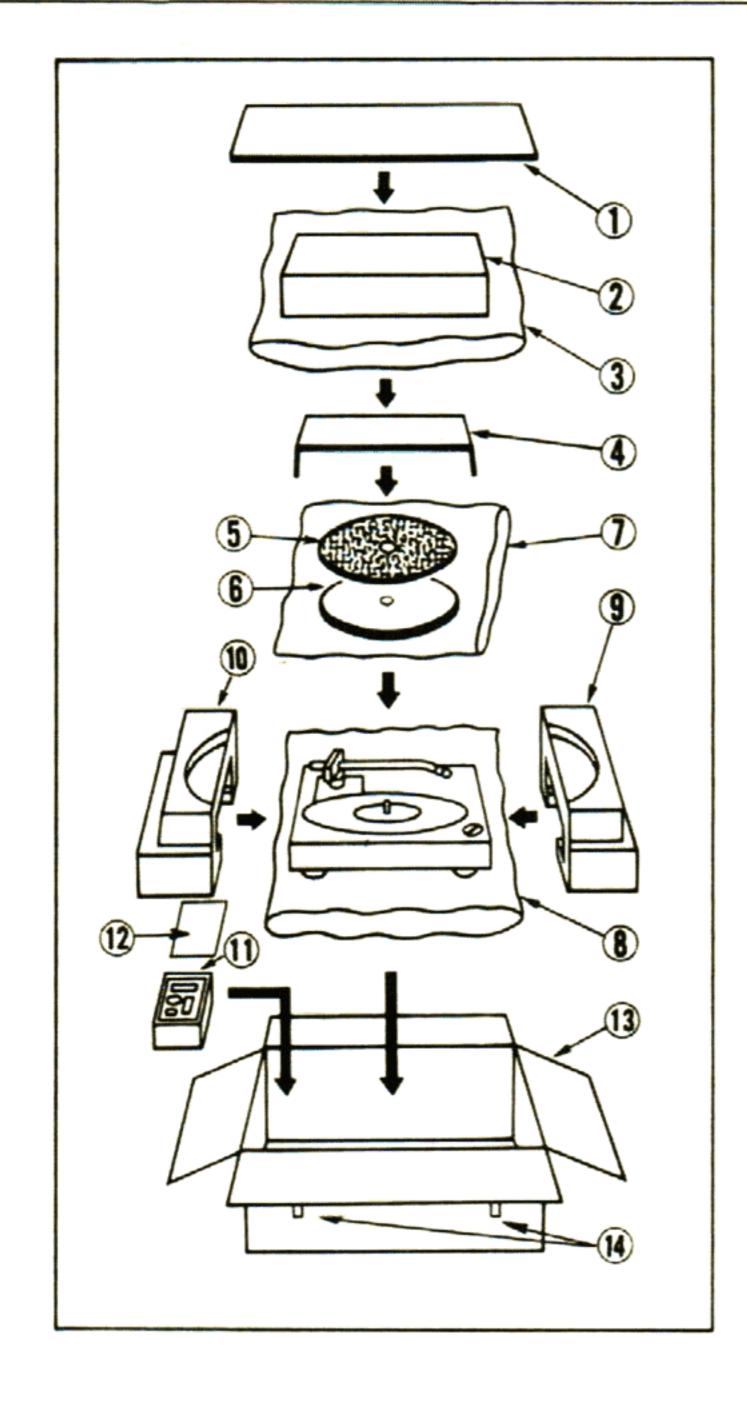



SANSUI ELECTRONICS CORPORATION: 55-11 Queens Blvd. Woodside, N.Y. 11377 U.S.A.

333 West Alondra Blvd. Gardena, California 90247 U.S.A.

3036 Koapaka St. Honolulu, Hawaii 96819 U.S.A.

SANSUI AUDIO EUROPE N.W.: North Trade Bldg (9th floor) Noorderlaan 133-Bus 1,2030 Antwerp, Belgium SANSUI AUDIO EUROPE S.A.: Ababella center, 6 Frankfurt AM Main, Lyoner Strasse 44-48, West Germany